


NASA Tech Briefs

Official Publication of the
National Aeronautics and
Space Administration
August 1992 Vol. 16 No. 8

Transferring Engineering
Technology to Over 200,000
Qualified Readers Throughout
Industry and Government

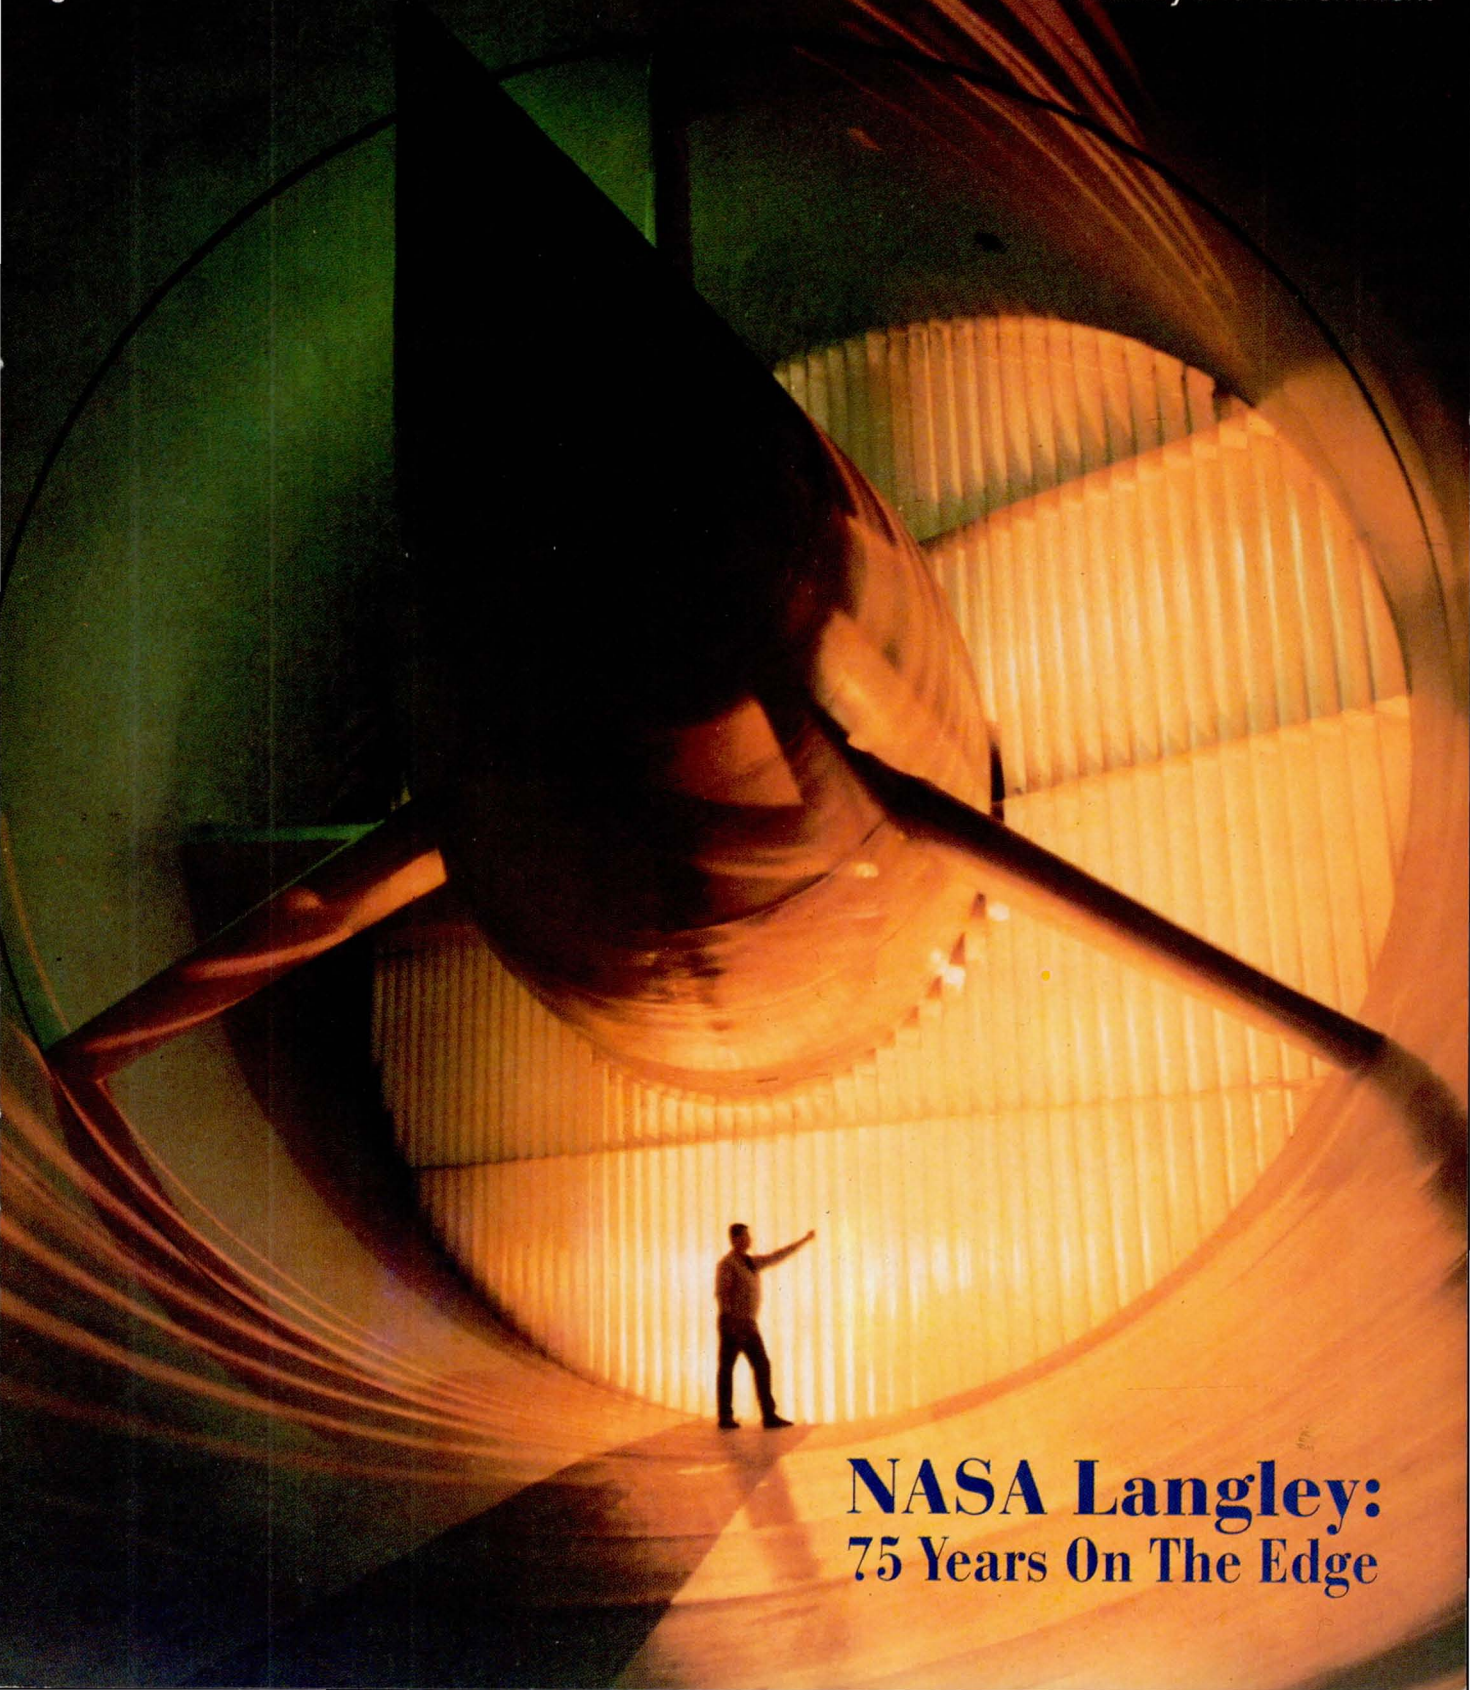

**NASA Langley:
75 Years On The Edge**

1 GB CAPACITY. 35 MS SEEK. ONE DRIVE. TWICE THE PERFORMANCE.



With a 1.25 MB per second transfer rate and a 35 ms average seek time, the 1 GB CY-2000 optical disk drive saves and restores files at hard disk speed. All on a removable media that protects your data from unpredictable head crashes. Once you lose your hard disk files, they're gone forever. But data stored on optical disks remains secure – and quickly accessible.

The CY-2000 is perfect for data-intensive applications like desktop publishing, multimedia, digital video, CAD/CAM, medical imaging and more. It's also ideal for private databases and security-sensitive files because the disks can be removed and stored to prevent unauthorized access.

What's more, it's fully compatible with your personal computer, mini-computer, workstation or server.

With the CY-2000, each disk stores 1 GB, making it twice the capacity of competitive optical disk drives. The media are erasable, rewritable, and extremely durable. One platter can last over 40 years. And because the disks are small and lightweight, you'll enjoy reduced storage and shipping costs.

The CY-2000 is part of our family of data storage products that includes QIC tape streamers, magneto-optical disk drives, and 8mm tape drives and tape libraries.

If you want gigabyte capacity, fast file access, and the security of a removable media, the CY-2000 is a perfect fit. Call today for more information at (804) 873-9000.




TRUE PLUG COMPATIBILITY WITH:

Alpha Micro	Motorola
Altos	Macintosh
Apollo	NCR
Arix	NeXT
AT&T	Novell
Basic-4	OS/2
Convergent	PS/2
DataGeneral	PC 386/ix
DEC 3100/	PC MS-DOS
5000	PC Xenix/Unix
DEC BI-Bus	Pyramid
DEC Q-Bus	Sequent
DEC DSSI	Silicon
DEC Unibus	Graphics
HP	Sun
IBM RISC/	Texas
6000	Instruments
IBM RT	Unisys
ICL	and more
Intergraph	

CONTEMPORARY
CYBERNETICS
Group

For More Information Circle No. 322

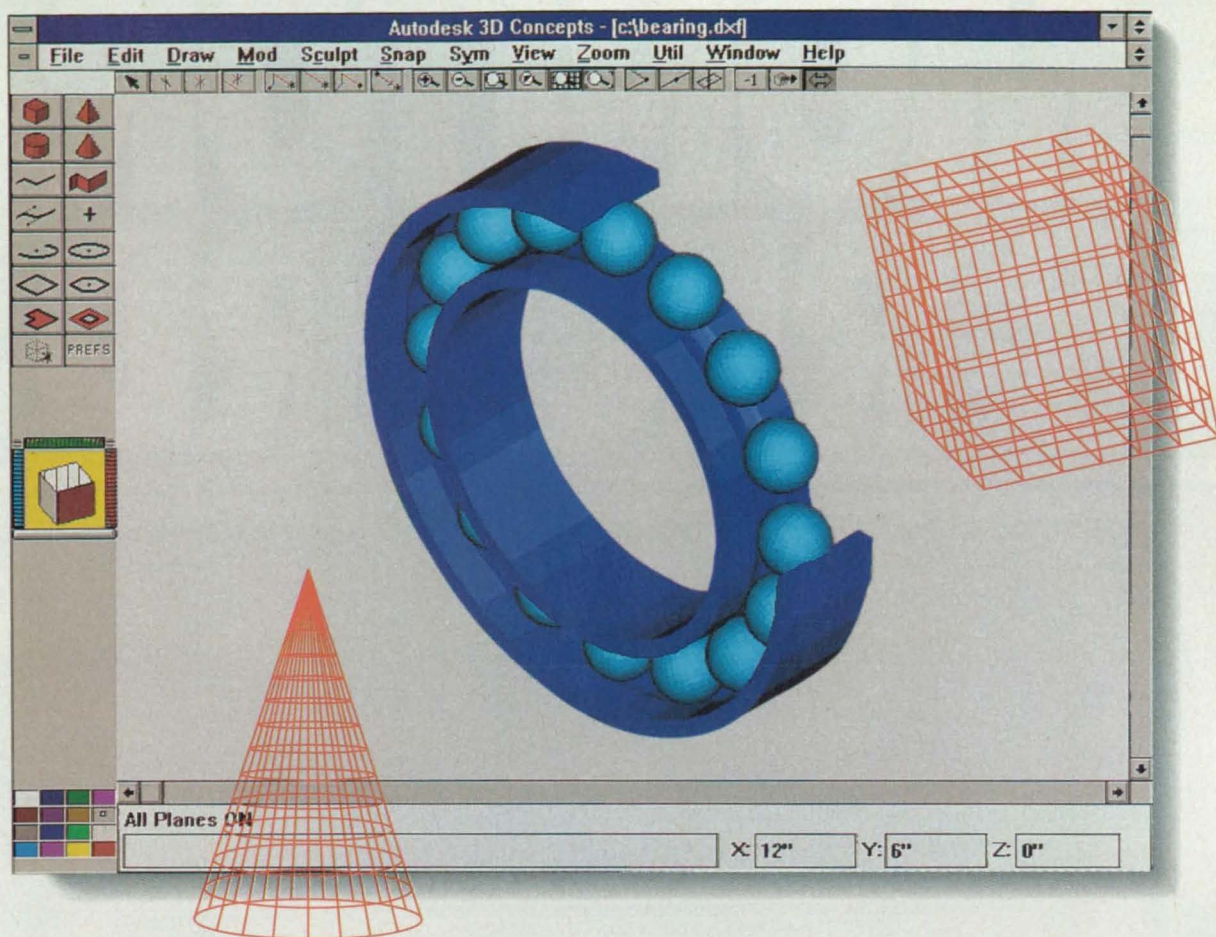

IMAGINE...3D MODELING IN WINDOWS!

Introducing Autodesk 3D Concepts



The unique Rotation Cube lets you turn objects to any angle.

Whether you're designing mechanical parts, planning urban facilities, or creating electronics packaging, you can visualize your ideas more quickly and with greater accuracy if you model your designs as three dimensional objects. And now there's a product that lets you do just that. Quickly. And affordably.

Autodesk 3D Concepts™ for Windows™ is a unique new software program that lets you create wire frames and surface render the models to give your design a realistic appearance. Autodesk 3D Concepts is extraordinarily easy to use, thanks to its innovative tool set and its familiar Windows menus and commands.

Here are a few of the features that make Autodesk 3D Concepts unique:

- ▶ *Rotation Cube lets you view objects from any angle*
- ▶ *Ground Plane for visual reference*


- ▶ *Sculpting Tool for shaping surfaces*
- ▶ *Perspective and Isometric Views*
- ▶ *Light Source Shading*
- ▶ *Works with AutoCAD .DXF and Generic CADD*
- ▶ *Transfers to other Windows programs*

If you want to cut your time from concept to production, look into Autodesk 3D Concepts. In fact, if you own another 3D modeling package, you can get Autodesk 3D Concepts for Windows for just \$129. For details on this limited time offer, call Autodesk Retail Products at (800) 228-3601 and ask for InfoPak A46.

AUTODESK

For More Information Circle No. 504

THE ALL NEW ASTRO-MED MONITOR & RECORD

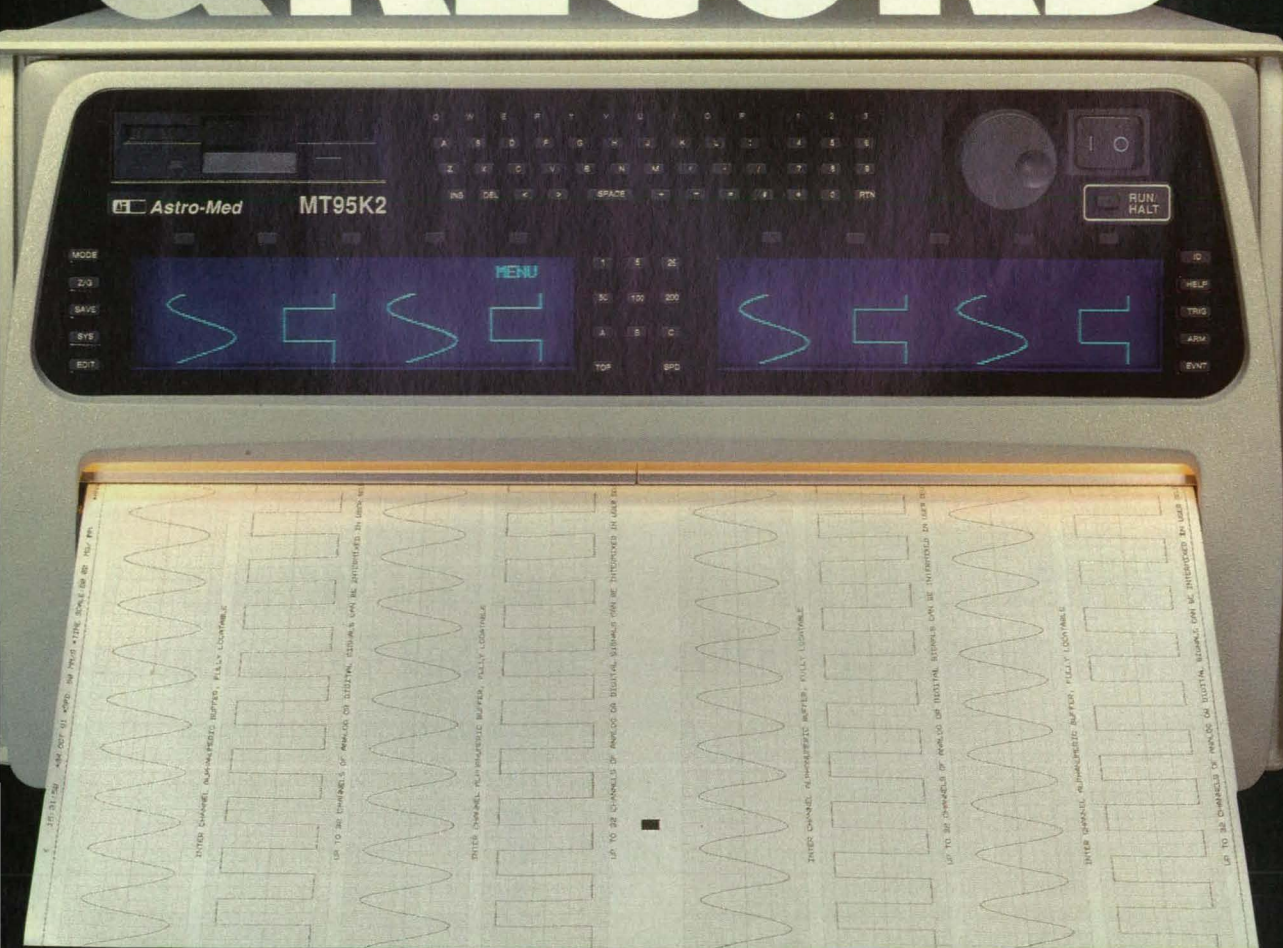

No Delay...see full traces on monitor while recording!
Personal Chart Setups with on-board floppy drive
Data Capture...up to 32 megabytes in RAM;
120 megabyte internal hard drive; stream to external
drive via SCSI
8 to 32 Waveform Channels...plus 64 events; DC to
20 kHz; chart speeds to 500 mm/sec
Laser Printer Chart Resolution...300 dpi; clear,
crisp traces
 Simply, the MT95K2 is another major Astro-Med
 innovation in "chart recording": you can preview your


data, record it, store it, play it back, send it to disk for
 analysis, record it again, and more! Whether you need a
 basic 8 channel recorder or a sophisticated 32 channel
 recording system, the MT95K2 is the perfect platform
 for you today.

Call, Fax, or write for details!

Astro-Med, Inc.

Astro-Med Industrial Park, West Warwick, Rhode Island 02891
 Phone: (401) 828-4000 • Toll Free (800) 343-4039
 Fax (401) 822-2430 • Telex 710-382-6409

Sales and Service Centers in London, Paris, Frankfurt and Milan

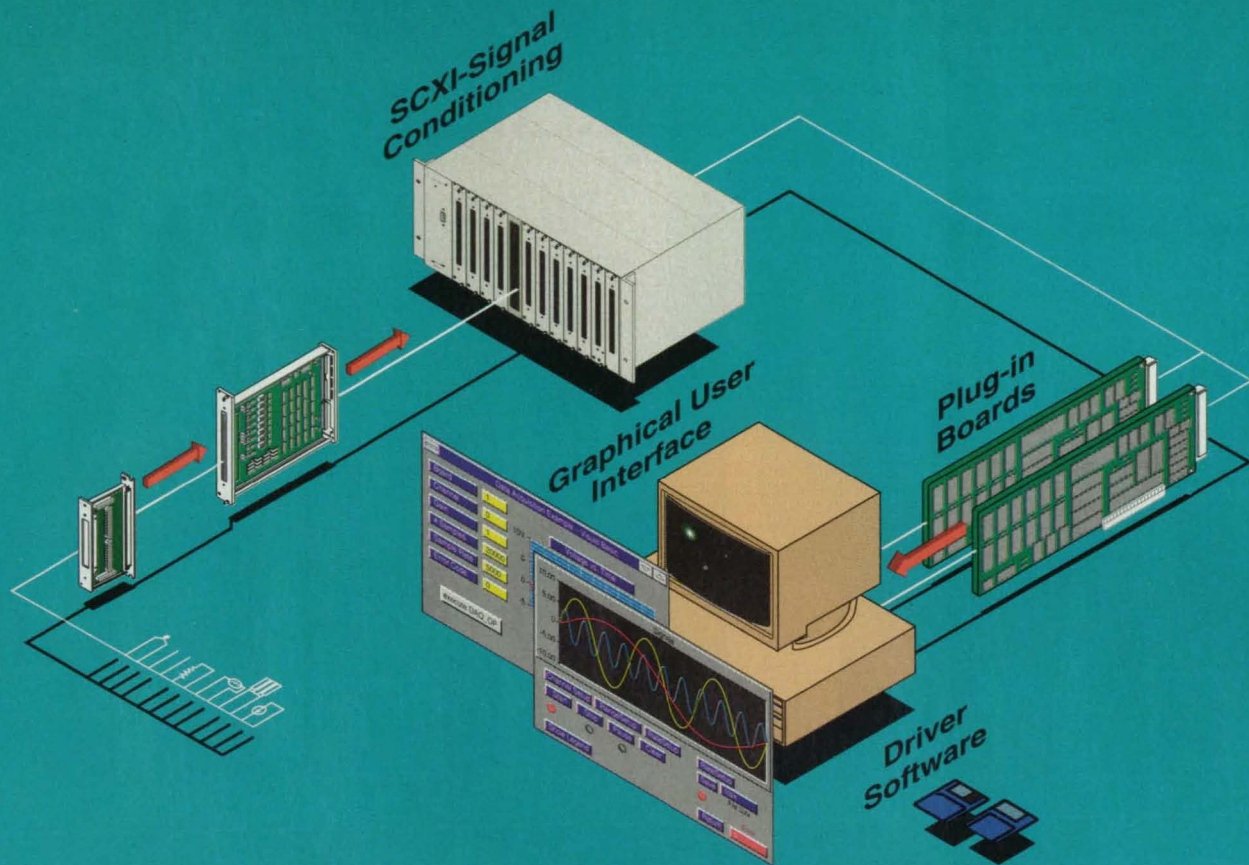

The Choice for Complete PC Data Acquisition Systems

National Instruments gives you more than great plug-in boards.

Graphical User Interface

We pioneered the use of graphical user interfaces for instrumentation software and remain a leader in this technology, with our LabVIEW® and LabWindows® application software products.

Driver Software

Our NI-DAQ™ driver for DOS, Microsoft Windows, and the Macintosh, which is shipped with all our data acquisition boards, is like a data acquisition operating system with over 100 basic I/O routines, data and buffer manager capabilities, and a resource manager.

Plug-in Boards

We continue to introduce new technologies on our boards for the PC/XT/AT, EISA and PS/2. Innovations include an instrumentation amplifier that settles so fast that accuracy is maintained at all gains and sampling rates, antialiasing filters that cut off at the rate of 90 dB in one-sixth octave, and integrated multiboard synchronization with our RTSI® bus.

Signal Conditioning

The National Instruments SCXI system is a high-performance, multichannel signal conditioning and signal routing front-end system.

SCXI conditions signals from thermocouples, RTDs, thermistors, strain gauges, voltage sources, and current sources.

Our **DAQ Designer™** system configuration software tool will help you design a complete data acquisition system.

Call us for your **FREE** copy:

(512) 794-0100
(800) 433-3488
 (U.S. and Canada)



6504 Bridge Point Parkway
 Austin, TX 78730-5039
 Fax: (512) 794-8411

Branch Offices: Australia 03 879 9422 • Belgium 02 757 00 20 • Canada 519 622 9310 • Denmark 45 76 73 22 • France 1 48 65 33 70 • Germany 089 714 50 93 • Italy 02 48301892
 Japan 03 3788 1921 • Netherlands 01720 45761 • Norway 03 846866 • Spain 91 896 0675 • Sweden 08 98 49 70 • Switzerland 056 27 00 20 • U.K. 0635 523545

Product names listed are trademarks of their respective manufacturers. Company names listed are trademarks or trade names of their respective companies. © Copyright 1992 National Instruments Corporation. All rights reserved.

SEE US AT SENSORS EXPO, BOOTH #378
SEE US AT THE NATIONAL CONFERENCE OF STANDARDS LABORATORIES, BOOTH #B19


Clean, dependable power.

AMPLIFIED

When you're powering high-current or sensitive industrial equipment, that power had better be clean and constant. But most important, strong.

Techron power amplifiers. They're the industry's heavy hitters when it comes to clean dependable high-current power. Techron power amplifiers reduce filtering requirements and give you a true power supply you can count on.

- ◆ Super-clean power from DC to 50 kHz.
- ◆ Total Harmonic Distortion: At 0.4% or better, one of the most distortion-free power sources in the industry.
- ◆ Inner Modulation Distortion: .001%
- ◆ Limiting: instantaneous with no flyback pulses, thumps or cutouts.
- ◆ Amplifier Output: Short-, mismatch- and open-circuit protected in voltage mode.
- ◆ Phase shift between input and output: from DC to 20 kHz less than -20 degrees.

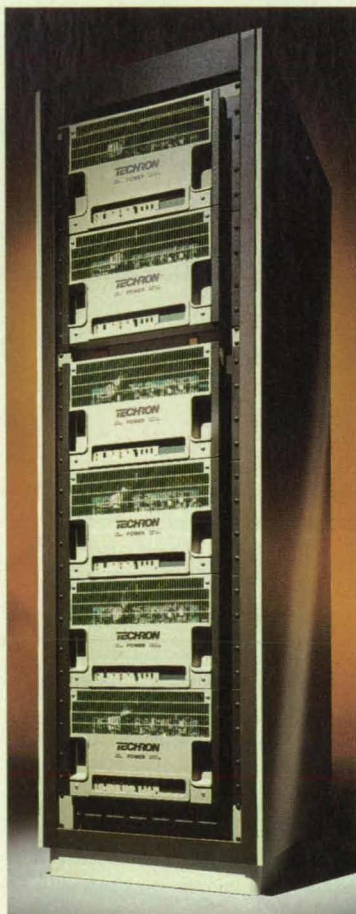

The right power

Different applications require specific solutions. That's how Techron came to be the power of choice for the gradient subsystem of one of modern medicine's most important diagnostic tools, the Magnetic Resonance Imaging systems. MRI manufacturers choose our power amplifiers which utilize advanced bi-level power supplies with clean, low-noise and linearity.


Tell us your application requirement. During development or in final application, Techron will back you up. With standard product or custom-configured amps. As a line voltage regulator and/or line voltage generator system. Working with you to solve power supply problems is what we do best.

That's what we mean by clean, dependable power. Amplified all the way down the line. Call Techron for more power than you've ever had before. **1-800-933-7956**

TECHRON

1718 W. Mishawaka Road, Elkhart, Indiana 46517

For More Information Circle No. 645

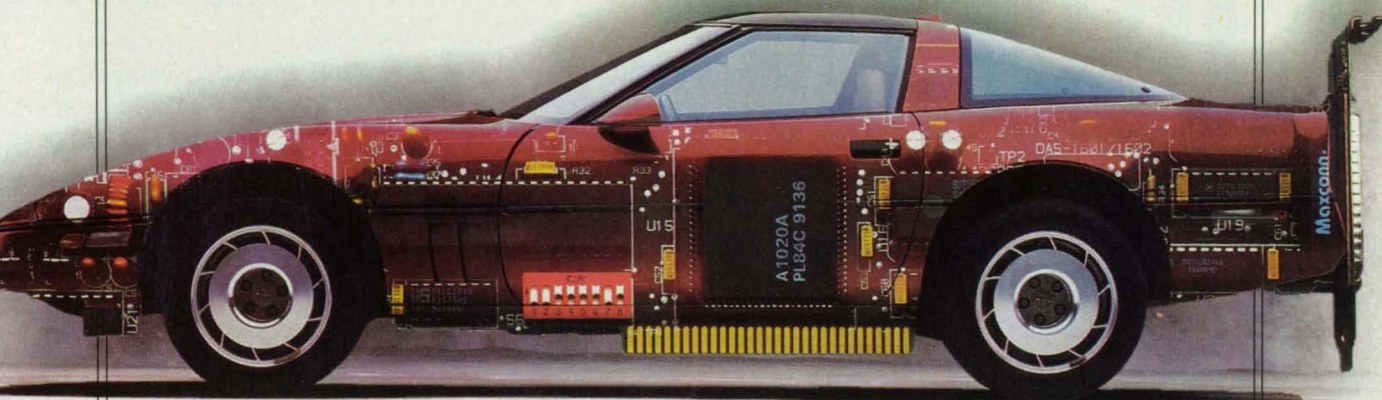

Introducing the DAS-1600. Fasten your seatbelts.

Turbocharged data acquisition performance at an economy price—only \$899.

When we introduced the DAS-16 in the early '80s, it raced quickly into the top spot among general purpose data acquisition boards.

Well, here we go again. We've just taken the wraps off the next generation: the DAS-1600. A board with breakthrough performance and the best software support in the industry. For the incredible price of \$899—less than our original DAS-16.

Packed with advanced features you need for the '90s. Including:

- 100 ksample/sec with 12-bit resolution.
- Burst mode to simulate simultaneous sample and hold.
- 8 differential or 16 single-ended analog inputs.
- 32 bits of digital I/O.
- 2, 12-bit D/As with 5 selectable



ranges for greater flexibility.

- Advanced ASIC design for lower cost and higher reliability.
- High-quality

four-layer printed circuit board

for reduced noise. □ Pop Up Control Panel for quick start-up. □ Optional Windows® 3.1 software. □ Extensive third-party software support.



Special "Fast Track" offer.

\$300 off new EASYEST AG™ software from Keithley Asyst when you buy a DAS-1600 board by Oct. 31, 1992. Get quick start-up, troubleshooting, acquisition to disk, and graphics for only \$95 (normally \$395). With a price of \$899, and an offer like this, the DAS-1600 will go even faster.

Call 800-348-0033

and ask for Cora Vette to order or for more information. And give yourself the winning edge.

KEITHLEY METRABYTE
DATA ACQUISITION

DAS1 NTB892

Keithley Data Acquisition, 440 Myles Standish Blvd., Taunton, MA 02780, FAX: 508-880-0179

©1992 Keithley Instruments, Inc. Keithley Metrabyte and Keithley Asyst are registered trademarks and EASYEST AG is a trademark of Keithley Instruments, Inc. Windows is a registered trademark of Microsoft Corporation.

For More Information Circle No. 419

Contents

Transferring Engineering Technology to
Over 200,000 Qualified Readers
Throughout Industry and Government

SPECIAL FEATURES

12 Editorial Notebook

14 Langley Anniversary Report

TECHNICAL SECTION

22 Electronic Components and Circuits



- 22 Paraboloidal Reflector With Movable Subreflector
- 22 Capacitive Proximity Sensor Has Longer Range
- 26 Determining Extinction Ratio of a Laser Diode
- 28 Barrier/ n/n^+ Varactor Frequency Multipliers
- 30 Equations for Designing Superconducting Transmission Lines
- 31 Solid-State Power Amplifier for 61.5 GHz

32 Electronic Systems




- 32 Balloon-Borne System Would Aim Instrument Toward Sun
- 34 GPS Measurement of Attitude
- 34 Transmission of Power Via Combined Laser Beams
- 35 Computer Jet-Engine-Monitoring System
- 38 Using Spectral Edge To Measure Doppler Shift
- 39 Effects of Phase Jitter on Lock Detection in QPSK
- 40 Detection and Avoidance of Obstacles by Helicopters

41 Physical Sciences



- 41 Measuring Hydrogen Plumes With Raman Lidar
- 41 Improved Raman-Emission Detector
- 43 Acousto-Optical Imaging Spectropolarimeter
- 44 Monitoring Polymer Curing Via Electromagnetic Impedance
- 45 Physical Models in GPSOMC Software
- 45 Soot-Free Combustion of Methane and LNG

46 Materials



- 46 Nearly Azeotropic Mixtures To Replace Refrigerant 12
- 47 Removing Undesired Fine Powder From Silicon Reactor

CAEM: Intelligent Computer Assistant for Engine Monitoring

CAEM: Intelligent Computer Assistant for Engine Monitoring

Features

- Monitors engine from pre-flight through shutdown procedure
- Single real-time interface/data display
- Automated strip chart generation
- Anomaly classification and recovery procedure displays

Benefits

- Simplified monitoring procedure
- Safety-of-flight improvement
- Productivity enhancement
- Reduced training time for new operators
- Relief for senior propulsion engineer

Photo courtesy NASA Ames

A new AI-based jet engine monitoring system developed at Ames Research Center promises to improve flight safety while saving engineering time. Turn to the tech brief on page 35.

48 Computer Programs



- 48 Transportable Applications Environment Plus
- 50 Curvilinear-Interpolation Program
- 50 Software for Integer Programming
- 50 Program Models Propagation of Failures
- 51 Program Handles Environmental-Test Data
- 51 Program for Logarithmic Interpolation of Test Data
- 52 Benchmark Lisp and Ada Programs
- 52 Software Operates on Bit-Map Images

53 Mechanics



- 53 Simple, Lightweight, Thermomechanical Coupling
- 53 Measuring Streamwise Momentum and Cross-Stream Turbulence
- 54 Improved Depiction of Computed Unsteady Flows
- 56 Tangential-Entry Injector With Internal Reed Valve
- 56 Measuring Large Circumferences More Precisely



(Continued on page 8)

NOW AVAILABLE FOR MICROSOFT WINDOWS

SIMULINK™

Block Diagram Software for Nonlinear Simulation of Dynamic Systems

Now Available!
Neural Network Toolbox
for use with MATLAB™

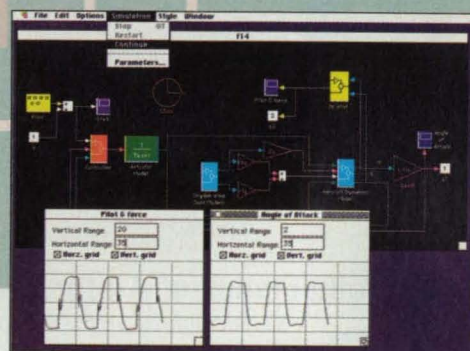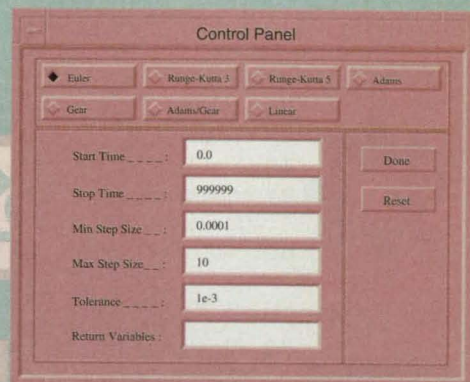

(Top) Use the Scope block to see the "real-time" response of this autopilot model during the simulation; (Center) Specify simulation parameters via dialog boxes or the MATLAB command line; (Bottom) SIMULINK takes full advantage of the X Windows, OSF/Motif, Microsoft Windows, and Macintosh windowing systems.



The MathWorks, Inc.
Cochituate Place
24 Prime Park Way
Natick, MA 01760 U.S.A.
Phone: (508) 653-1415
Fax: (508) 653-2997
Email: info@mathworks.com

DENMARK, FINLAND, ICELAND, NORWAY, SWEDEN

Computer Solutions Europe AB
Phone (46) 8 15 30 22, Fax (46) 8 15 76 35

FRANCE - Scientific Software Group
Phone (33) 1 45 34 23 91, Fax (33) 1 45 07 08 06

GERMANY - Bausch-Gall GmbH
Phone (49) 89 323 2625, Fax (49) 89 323 1063

ISRAEL - Omikron Delta (1927) Ltd.
Phone (972) 3 561 5151, Fax (972) 3 561 2962

JAPAN - Cybernet Systems Co., Ltd.
Phone (81) 3 3982 4641, Fax (81) 3 3980 7490

SWITZERLAND - ComSol AG
Phone (41) 31 961 70 11, Fax (41) 31 961 12 82

UNITED KINGDOM - Rapid Data Ltd.
Phone (44) 903 202819, Fax (44) 903 820762

Cambridge Control Ltd.
Phone (44) 22 342 0722, Fax (44) 22 342 3580

SIMULINK provides you with the tools for constructing and analyzing block diagram models interactively using a mouse and pull-down menus. You can explore the behavior of a system during a simulation and interactively see how the model's behavior changes as you change its parameters.

SIMULINK includes a comprehensive set of built-in blocks for creating models. In addition, SIMULINK lets you extend its functionality by creating your own tools. Customize built-in SIMULINK blocks or create your own as C, Fortran, or MATLAB code. SIMULINK delivers the flexibility to meet your needs.

SIMULINK is available for a wide range of computers, including UNIX® workstations, 386- and 486-based PCs, and the Apple® Macintosh. For more information on how SIMULINK can address your applications, contact The MathWorks today for a free information packet.

Dealer inquiries are invited.
Please call (508) 653-1415x439.

For More Information Circle No. 503

SIMULINK, formerly named SIMULAB, is the next-generation software for modeling, analyzing, and simulating nonlinear systems. SIMULINK delivers a combination of flexibility, ease-of-use, and speed in a single package.

- ▶ A complete set of tools for constructing and analyzing models of dynamic systems, including linear, nonlinear, discrete, continuous, and hybrid systems.
- ▶ The ability to describe models either in block diagram form or as sets of differential equations.
- ▶ A design, analysis, and simulation environment that is seamlessly integrated with MATLAB™ and the MATLAB application toolboxes.
- ▶ An intuitive graphical user interface based on the industry-standard X Windows™, OSF™/Motif™, Microsoft® Windows™, and Macintosh® windowing systems.

SIMULINK and MATLAB are trademarks of The MathWorks, Inc. Other product and brand names are trademarks or registered trademarks of their respective holders.

Contents *(continued)*

- 57 Studies of Positive-Position-Feedback Control
- 58 CFD Simulations of Sonic Booms in Near and Mid Fields

59 Machinery



- 59 Bearing Cartridge Designed To Reduce Wear
- 59 Dual-Roll Robotic Wrist-Joint Assembly
- 61 Improved Regenerative Sorbent-Compressor Refrigerator
- 62 Helicopter Rotor Blade With Free Tip

63 Fabrication Technology



- 63 Ultrasonic Probe for In Situ Inspection of Welds
- 63 Vacuum Plasma Spraying Replaces Electrodeposition
- 67 Tape-Smoothing Tool for Adhesion Tests
- 68 Making Crystal Filaments From Extruded Ceramic Rods
- 69 Obtaining Patterns of Holes in Directional Couplers
- 70 Lunar Habitat Would Be Assembled in Space

71 Mathematics and Information Sciences



- 71 Recognizing Patterns in Log-Polar Coordinates
- 72 Spurious Solutions of Nonlinear Differential Equations
- 73 Software for Computing Selected Functions

74 Life Sciences



- 74 Efflux of Nitrate From Hydroponically Grown Wheat
- 75 Air-Traffic Controllers Evaluate the Descent Advisor

ABP 


This document was prepared under the sponsorship of the National Aeronautics and Space Administration. Neither Associated Business Publications Co., Ltd. nor anyone acting on behalf of Associated Business Publications Co., Ltd. nor the United States Government nor any person acting on behalf of the United States Government assumes any liability resulting from the use of the information contained in this document, or warrants that such use will be free from privately owned rights. The U.S. Government does not endorse any commercial product, process, or activity identified in this publication.

Permissions: Authorization to photocopy items for internal or personal use, or the internal or personal use of specific clients, is granted by Associated Business Publications, provided that the flat fee of \$3.00 per copy is paid directly to the Copyright Clearance Center (21 Congress St., Salem, MA 01970). For those organizations that have been granted a photocopy license by CCC, a separate system of payment has been arranged. The fee code for users of the Transactional Reporting Service is: ISSN 0145-319X/92 \$3.00+.00

NASA Tech Briefs, ISSN 0145-319X, USPS 750-070, copyright © 1992 in U.S., is published monthly by Associated Business Publications Co., Ltd., 41 E. 42nd St., New York, NY 10017-5391. The copyrighted information does not include the (U. S. rights to) individual tech briefs which are supplied by NASA. Editorial, sales, production and circulation offices at 41 East 42nd Street, New York, NY 10017-5391. Subscription for non-qualified subscribers in the U.S., Panama Canal Zone, and Puerto Rico, \$75.00 for 1 year; \$125.00 for 2 years; \$200.00 for 3 years. Single copies \$10.00. Foreign subscriptions one-year U.S. Funds \$150.00. Remit by check, draft, postal, express orders or VISA, MasterCard, and American Express. Other remittances at sender's risk. Address all communications for subscriptions or circulation to NASA Tech Briefs, 41 East 42nd Street, New York, NY 10017-5391. Second-class postage paid at New York, NY and additional mailing offices.

POSTMASTER: please send address changes to NASA Tech Briefs, 41 E. 42nd Street, Suite 921, New York, NY 10017-5391.

STEADY-STATE SOLUTION ANALYSIS

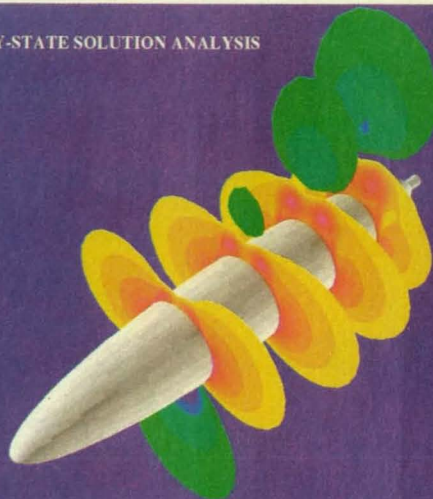

PLOT4D

Photo courtesy NASA Ames

The Plot4D computer program (page 54) creates animated pictures of unsteady and steady air flows—such as around this prolate spheroid—providing computational fluid dynamics researchers with a powerful new visualization tool.

DEPARTMENTS

New Product Ideas	18
NASA TU Services	20
New on the Market	76
New Literature	78
Subject Index	79
Advertisers Index	82

on the cover:

A technician prepares to unlatch the door built into the guide vanes of the 16-Foot Transonic Wind Tunnel at NASA's Langley Research Center, which this year celebrates its 75th anniversary (see our report on page 14). The tunnel, built in 1939 and renovated in 1990, was recently used to develop two-dimensional nozzles that can deflect jet exhaust in any direction for increased maneuverability. This "thrust vectoring" may allow future military aircraft to be designed without traditional tail control surfaces or perhaps without the entire tail.

(Photo courtesy Langley Research Center)

Now in its third cycle of mapping the surface of Venus, the spacecraft Magellan is close to its goal of producing a complete map of the planet. The key to gathering data is the Hughes Aircraft Company-built synthetic aperture radar, the sole scientific instrument aboard Magellan. Even before the first cycle ended, in mid-1991, Magellan had mapped 84% of Venus' surface, returning more digital data than all previous U.S. planetary missions combined, with resolutions 10 times better than those provided by earlier missions. To optimize radar performance, Hughes also designed a computer software program capable of handling the nearly 950 commands required per cycle. Each cycle takes one Venusian "day," the equivalent of 243 Earth-days.

Inexpensive aluminum clips help trim nearly \$200,000 from the cost of a satellite. The clips were designed and used by Hughes to hold major structural elements of the new HS 601 communications satellites together. Previously, the satellites were bonded together, a time-consuming process because of the close tolerances involved and the approximately one week required for each bond to cure. With about 250 structural joints per satellite, the clips save nearly \$200,000 in hands-on labor per spacecraft. Another benefit of the technique is the elimination of bond testing. Verifying the torque, a much faster process, is all that's required with the new process.

Now, in times of disaster, even the most isolated outposts can be linked directly into the public telephone network. It's the result of portable versions of satellite earth stations called very small aperture terminals (VSATs), built by Hughes. VSATs played a vital role in three major relief efforts in 1991: the eruption of Mt. Pinatubo in the Philippines, the massive oil spill in Valdez, Alaska, and the 90,000-acre fire in the Idaho forest. VSATs can be shipped and assembled quickly and facilitate communications using more powerful antennas that are much smaller than conventional satellite dishes. The Hughes-designed networks' reliability and an availability rate of 99.5 percent make VSATs an excellent solution to conventional communications systems, which in disasters often experience serious degradation due to damage or overload.


Traffic managers will be better able to monitor, analyze, and control traffic flow, with the aid of Hughes' multi-spectral sensors and information management systems. These technologies will play an expanding role to help offset the increasing congestion on America's roads, by creating "smart highways." At a moment's notice, data could be gathered to help police, tow trucks, and ambulances respond to emergency crises. Understanding flow patterns and traffic composition would also help traffic engineers map out future traffic control strategies. The result of less traffic congestion will be billions of vehicle hours saved each year.

Some 700,000 school children experienced a field trip to the ocean floor off the Galapagos Islands, thanks in part to Hughes' SBS satellite. This high-technology journey was part of an unusual educational program — the JASON Project — which integrated the latest in marine science, videoteleconferencing, and satellite communications. Transmitted by Hughes' SBS satellite, video images of exotic underwater sea life flashed across large display screens, practically enveloping students in classrooms and auditoriums across the United States and Canada. The sharp, projected images were the result of Hughes' liquid crystal light valve technology.

For more information write to: P.O. Box 80032, Los Angeles, CA 90080-0032

The logo consists of the word "HUGHES" in a bold, white, sans-serif font, centered within a dark rectangular box.

Real Time Video On Workstations

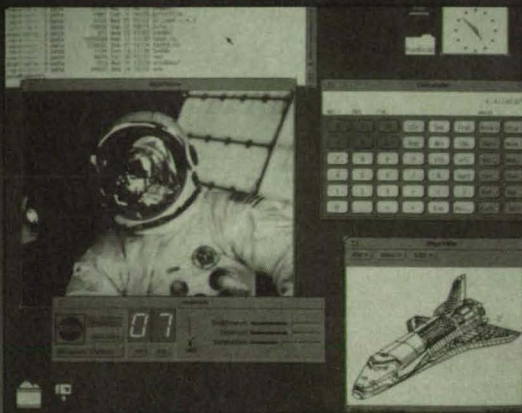

The RGB/View™ System for Mission Critical Applications

The RGB/View displays live TV or other full motion video on workstations and high resolution displays. The RGB/View accepts video signals (NTSC or PAL) from a camera, tape recorder, videodisc or built-in TV tuner. FLIR input is also available. True color video is displayed full screen or as a scaleable window.

- Real time video under all conditions
- No impact on graphics performance
- Image capture
- Text and graphics overlays on video
- Scale, reposition, freeze
- X-Windows compatible
- Cable ready tuner
- Priced from \$7500.00

Applications include C³I, robotics, interactive videodisc training, video teleconferencing, process control, surveillance and simulation.

Standalone peripheral and board level models available.



SPECTRUM

950 Marina Village Parkway Alameda, CA 94501
Tel: (510) 814-7000 Fax: (510) 814-7026

GSA Contract #GS03F2032A

For More Information Circle No. 467

NASA Tech Briefs

Official Publication of
National Aeronautics and
Space Administration

ABP

BPA

NASA Tech Briefs:

Published by **Associated Business Publications**
Editor-in-Chief/Publisher **Bill Schnirring**
Associate Publisher/Editor **Joseph T. Pramberger**
Managing Editor **R.J. Laer**
Associate Editor **Sarah L. Gall**
Technical Advisor **Dr. Robert E. Waterman**
Production Manager **Rita Nothaft**
Traffic Manager **James E. Cobb**
Art Director **Pierre Granier**
Marketing Director **Wayne Pierce**
Advertising Coordinator **Nipa Joshi**
Telecommunications Specialist **Evelyn Mars**
Reader Service Manager **Scott Floman**

Briefs & Supporting Literature:

Provided to National Aeronautics and Space Administration by
International Computers & Telecommunications, Inc.,
NY, NY with assistance from **Logical Technical Services, NY, NY**
Technical/Managing Editor **Ted Selinsky**
Art Director **Luis Martinez**
Administrator **Elizabeth Teixeira**
Chief Copy Editor **Lorne Bullen**
Staff Writers/Editors **Dr. James Boyd, Dr. Larry Grunberger,**
Dr. Theron Cole, Jordan Randjelovich,
George Watson, Oden Browne
Graphics **Zinaida Gimpeleva, Vernald Gillman,**
Pamela Baynham, Charles Sammartano
Editorial & Production **Bill Little, Ivonne Valdes,**
Susan Kyu Oh, Frank Ponce

NASA:

NASA Tech Briefs are provided by the National Aeronautics and Space Administration, Technology Utilization Division, Washington, DC:
Administrator **Daniel S. Goldin**
Assistant Administrator for Commercial Programs **John G. Mannix**
Deputy Assistant Administrator(Programs) **Frank E. Penaranda**
Deputy Director TU Division(Publications Manager) **Leonard A. Ault**
Manager, Technology Utilization Office, NASA Center
For AeroSpace Information **Walter M. Heiland**

Associated Business Publications

41 East 42nd Street, Suite 921, New York, NY 10017-5391
(212) 490-3999 FAX (212) 986-7864

President **Bill Schnirring**
Executive Vice President **Frank Nothaft**
Vice President/Chief Operating Officer **Domenic A. Mucchetti**
Operations Manager **Rita Nothaft**
Controller **Felecia Lahey**
Trade Show Director **Wendy S. Janiel**
Systems Analyst **Patrick Wolfert**

Advertising:

New York Office: (212) 490-3999 FAX (212) 986-7864

Account Executives:

NY, NJ, OH, MI **Brian Clerkin**
at (201) 366-2751
NJ (Area Codes 201 and 908) **Debby Crane**
at (201) 967-9838
PA, DE, NJ (Area Code 609) **Tara Morie**
at (215) 640-3118
VA, DC, MD, WV **John D. Floyd, CBC**
at (215) 399-3265
Eastern MA, NH, ME, RI **Paul Gillespie**
at (508) 429-8907; **Bill Doucette** at (508) 429-9861
Western MA, CT, VT **George Watts**
at (413) 253-9881
West Central, Southeast, Southwest **Douglas Shaller**
at (212) 490-3999
Midwest—IL, WI, MN **Paul Leshner, CBC**
at (312) 296-2040
Northwest—WA, OR **Bill Hague**
at (206) 858-7575
West Coast—CA, AZ, NV, NM, UT **Stillman Group**
at (310) 372-2744
for Area Codes 602/702/505/818/805: **Paul Sanacore**
for 310/619/714: **Robert D'Alexander, Tom Stillman**
for 408/415/916/209/707/801: **Ron Hall**

NTBM-Research Center

Account Supervisor **Lourdes Del Valle**

Get the highest resolution microminiature color camera.



**With our quick delivery,
you could say it's at your fingertips.**

When you need a microminiature color camera, you usually need it quickly. That's why we make it our business to ship the IK-M40A right away. And fast delivery is just the beginning of our exceptional performance.

The IK-M40A's high resolution and small size make it ideal for inspecting everything from nuclear reactors to printed circuit boards, for capturing images from a football helmet or hockey net, or for bringing the images from a microscope or dental patient's mouth to a screen.

This fixed-lens camera uses a 1/2", 420,000-pixel CCD image sensor and Y/C video output to put over 460 lines of horizontal resolution into a camera head just 1-1/2"

long, 5/8" in diameter, and weighing 1/2 ounce. It has minimum illumination of only 10 lux and automatic tracking to adjust white balance during changing lighting conditions. So you get extraordinary detail, and you maintain that detail in all lighting.

For clear images of fast-moving objects, the IK-M40A's electronic shutter has nine pre-set, selectable speeds — from 1/60 second to 1/10,000 second. And since it can be separated from its CCU by up to 30 meters, it's ideal for non-destructive inspection of inaccessible locations.

For more information, call (800) 253-5429. The highest resolution microminiature color camera is at hand.

In Touch with Tomorrow
TOSHIBA

TOSHIBA AMERICA C.P., INC. Information and Imaging Technologies Group 1010 Johnson Drive Buffalo Grove, Illinois 60089-6900

For More Information Circle No. 558



Editorial Notebook

New Directions, New Opportunities

As the aerospace and defense industries go through what has been referred to in the popular press as "downsizing," we are well aware that this euphemism for massive layoffs has caused pain and upheaval in many companies and lives.

Next month, in our September issue, we will feature the efforts being made by aerospace firms to expand beyond their traditional military/aerospace base into further-ranging commercial ventures. As you'll see, the approaches run the gamut from establishing technology licensing divisions—one aerospace contractor recently licensed a magnetic levitation technology to a company developing educational toys—to pursuing cooperative R&D agreements with commercial manufacturers.

As you see the new directions these companies are taking, we also hope you'll see employment opportunities for many of those whose lives have been short-circuited by this "downsizing." While most *NASA Tech Briefs* readers are employed, many of us know people who have been "downsized" and could use some help in finding new jobs. We hope you'll share the September issue with them, and also tell them about a new program we have initiated to help them in transition.

Beginning with the October issue, we will run two pages of "positions wanted" advertisements free for those engineers and scientists who are currently unemployed and actively seeking work. Economics force us to limit this effort to two pages and it will be first-come, first-served in the magazine. All you need to do is send us a resume and a 50-word synopsis of what you'd like to state in the ad. We'll provide a box number for anonymity if you prefer, rewrite the ad if needed, and send the resume to those who inquire. While this service will be free for the advertiser—the person looking for work—there will be a modest handling charge billed to companies who request resumes.

Send the resume and synopsis to: *NASA Tech Briefs*, Positions Wanted, 41 East 42nd St., # 921, New York, NY 10017.

Please, if you're currently employed but nervous, don't ask for the free service. We want to reserve the listings for those who need them most, and, unfortunately, we expect that there will be more requests for ads than we can fulfill at first, and not enough inquiries to make the effort budget-neutral, at least not in the beginning. We plan on running each ad once, but we will keep each resume on file and offer a synopsis of monthly ads to companies on request.

We keep hearing hints and seeing signs that things are getting better. While we're hoping they're all accurate, we're also hoping that these two ad pages will bring companies with needs together with people possessing the skills to fulfill those needs. □

Coming In September:

The Technology Connection

NASA Tech Briefs' new monthly advertising section designed to speed the transfer of new technologies to market and enable our 201,000+ readers to easily locate people and services that can help them in their work. The Technology Connection will feature these categories and more:

- Patents Available for License
- Cooperative R&D Opportunities
- Strategic Partnerships
- Technologies Wanted
- Contracting & SBIR Opportunities
- Financing Opportunities
- Information Searches/Databases
- Professional Services (inc. Patent Attorneys & Consultants)
- Labs/Test Facilities
- Research Parks/Incubators
- Associations/Societies
- Tech Transfer Publications
- Workshops/Seminars/Videos

Listings are \$300 for one column inch or \$500 for a 2" bold-rule boxed listing. (Additional inches in same ad are \$250). Special introductory offer: buy two, get two free; \$600 (payable with order) buys four 1" listings for the balance of 1992, Sept.- Dec. To advertise in this low-cost, high-impact section, call Evelyn Mars or Luke Schnirring at (800) 944-NASA.

THE TECHNOLOGY CONNECTION
To Advertise Call (800) 944-NASA

<small>Patents Available for License</small> 1" Listing <div style="border: 1px solid black; height: 40px; margin-top: 5px;"></div>	<small>Professional Services</small> <div style="border: 1px solid black; height: 40px; margin-top: 5px;"></div>	<small>Strategic Partnerships</small> <div style="border: 1px solid black; height: 40px; margin-top: 5px;"></div>	<small>Contracting & SBIR Opportunities</small> <div style="border: 1px solid black; height: 40px; margin-top: 5px;"></div>
<div style="border: 1px solid black; height: 40px; margin-top: 5px;"></div>	<div style="border: 1px solid black; height: 40px; margin-top: 5px;"></div>	<div style="border: 1px solid black; height: 40px; margin-top: 5px;"></div>	<div style="border: 1px solid black; height: 40px; margin-top: 5px;"></div>
<div style="border: 1px solid black; height: 40px; margin-top: 5px;"></div>	<div style="border: 1px solid black; height: 40px; margin-top: 5px;"></div>	<div style="border: 1px solid black; height: 40px; margin-top: 5px;"></div>	<div style="border: 1px solid black; height: 40px; margin-top: 5px;"></div>



GOULD
Electronics

Our new recorder comes with everything but complications.


Sitting down with our new WindoGraf® recorder is like sitting down with a trusted friend. WindoGraf is as easy to use as the recorders we've been making—and you've been using—for years.

Nearly everything about WindoGraf is familiar, from its recorder-style speed controls to its bench-top portability. And when it comes to signal conditioning, WindoGraf offers just what you'd expect in a Gould recorder: input-to-output isolation, DC offset (zero suppression), variable sensitivity, and a selection of signal conditioners to meet most physical test requirements. WindoGraf also features a unique CRT display that lets you monitor your signals in real-time without continuously running paper. And if you'd like to see hard copy, press a button to activate WindoGraf's 4-channel thermal array recorder, which also operates in real-time.

Press another button, and your signals are recorded on WindoGraf's built-in disk drive for future review or analysis.

WindoGraf. Just another way Gould is helping you meet your physical test and measurement needs . . . without complications.

For More Information Circle No. 484

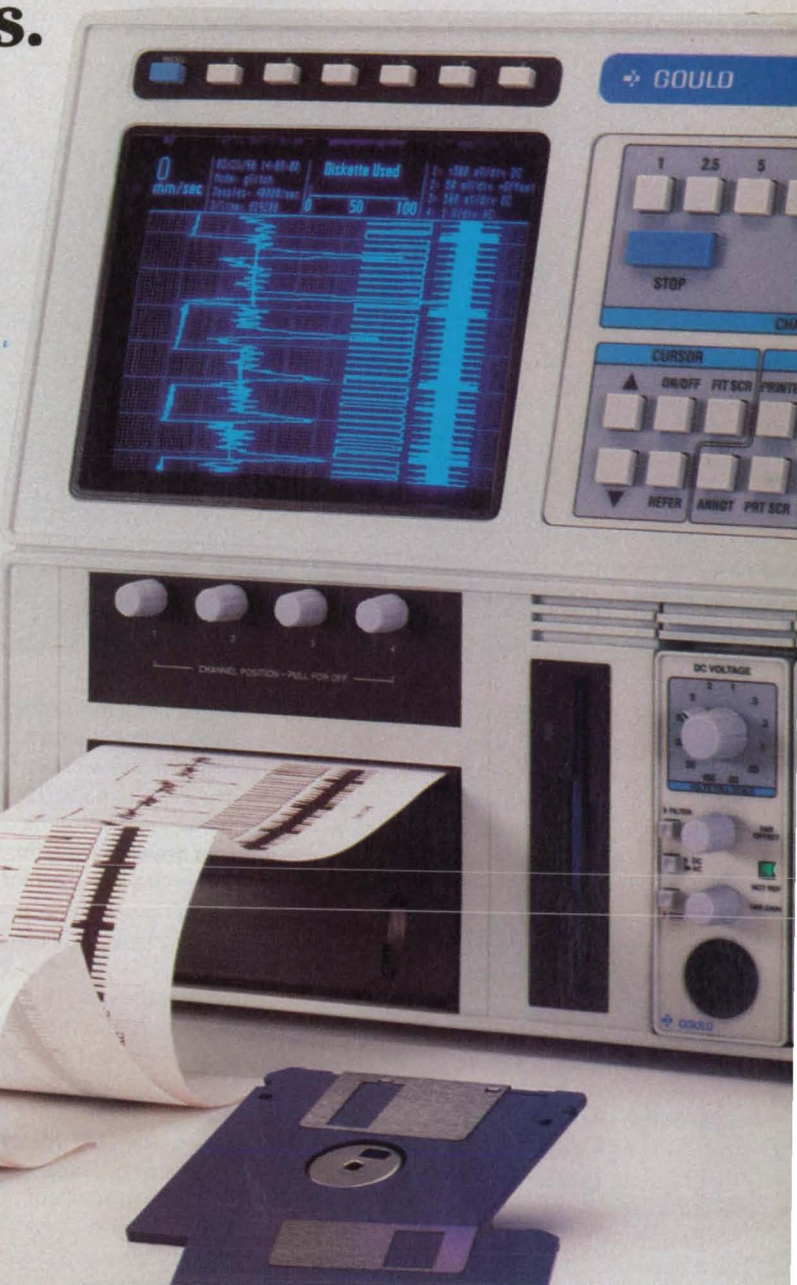

Yes! Please rush me a **FREE** WindoGraf brochure!

(please print, or affix business card)

NTB 8/92

NAME: _____ TITLE: _____

COMPANY: _____

STREET: _____

CITY: _____ STATE: _____ ZIP: _____

TELEPHONE: _____

Send to: Gould Inc., Test and Measurement Group, 8333 Rockside Road, ValleyView, Ohio 44125, or call (216) 328-7000, Fax (216) 328-7400.

LANGLEY RESEARCH CENTER

1917-1992



The HL-20 is Langley's candidate vehicle to complement the space shuttle, designed primarily for the transport of space station crews.

This year, NASA's Langley Research Center, Hampton, VA, celebrates 75 years as one of the world's premier aeronautical and aerospace research laboratories. The center's rich history spans the era of air and space travel to include such highlights as the first aircraft to break the sound barrier, landing a man on the moon, and the pioneering technology of the space shuttle.

The nation's first government-run civilian aeronautical laboratory began rather modestly on July 17, 1917. Initially called Langley Field, in honor of the aeronautical pioneer Samuel Pierpont Langley, it was the founding research facility of NASA's predecessor, the National Advisory Committee for Aeronautics (NACA), formed in 1915 and funded by President Woodrow Wilson with just \$5000. By the time its first wind tunnel was dedicated in 1920, Mr. Langley had died and the NACA facility became the Langley Memorial Aeronautical Laboratory. With NACA's formal abolishment in 1958 and the absorption of its facilities into the new National Aeronautics and Space Administration, the laboratory was renamed the Langley Research Center, as it is known today.

A consistent forerunner in wind tunnel design and research, the center constructed the world's first variable-density wind tunnel in 1923, which provided the primary source of data for the nation's growing aviation industry. The tunnel set the standard for all variable-density wind tunnels in use today, and was designated a National Historic Landmark in 1985. Building on its wind-tunnel supremacy, the center soon added a propeller research tunnel, a full-scale tunnel, and constructed the first transonic tunnel in 1950, featuring a slotted throat test section.

The center's engineers fostered both transfer of research findings and their own awareness of pressing problems by working closely with aircraft manufacturers and academic researchers. One of the center's most ingenious early designs, in response to broad-ranging requests for a means to reduce wind drag, was cowling in radial aircraft engines. The innovation won for NACA in 1929 the prestigious Collier trophy, recognizing the year's greatest aeronautical achievement. Engine cowling revolutionized aircraft design in the 1930s and saved the aviation industry millions of dollars.

During World War II, NACA research-

ers tested and boosted the performance of virtually every type of American combat plane, redesigning some 115 aircraft. The expertise gained was applied after the war to the challenges of high-speed flight. Langley scientists joined with the military in a supersonic aircraft development program that culminated in Charles E. Yeager's historic flight beyond the speed of sound on October 14, 1947. The program garnered Langley another Collier trophy, and provided a stepping stone to development of the X-15, America's first hypersonic transatmospheric vehicle.

Reducing aerodynamic drag to increase efficiency and performance persisted as a central focus of efforts to send aircraft soaring at ever-increasing speeds. Langley innovations that helped set the pace of high-speed aircraft development included laminar-flow airfoils and the swept wing in the 1940s, the variable-sweep wing in the 1950s, and the supercritical wing in the late 1960s. The transonic area rule, an innovative guide to shaping high-speed aircraft for optimum balance between wing and fuselage volume, allowed planes to safely pass through Mach 1 and won Langley yet another Collier in 1954.

Onward and Upward

Serving as the foundation of the newly-formed NASA at the end of the 1950s, Langley helped give birth to the space age. NASA's manned space program began at the center, where the original seven astronauts trained for Project Mercury. Langley also supported the subsequent manned space programs—Gemini, Apollo, Skylab—providing spacecraft design and testing, flight concept development, and mission planning. Notable successes included demonstrating for Project Apollo the feasibility of lunar-orbit rendezvous by employing a lunar landing module detachable from the mother ship. The concept expedited man's first moon landing which propelled the nation to the forefront of space technology.

Various unmanned space projects also relied on Langley ingenuity, including the Echo communications satellites, the Explorer, the Lunar Orbiter, and the more recent Long Duration Exposure Facility, a large satellite carrying 57 space experiments into orbit for six years. Since 1959, Langley has managed the Scout launch vehicle, designed for unmanned small satellite missions and high-altitude probes. Capable of launching a 385-pound satellite into a 500-mile orbit, the veteran Scout has had a success rate of 96 percent on 114 launches, thereby earning a spot at the National Air and Space Museum. On a larger scale, Langley

managed the enormously fruitful Viking project, which landed two automated laboratories on Mars.

Langley's contributions to the ongoing space shuttle program included 60,000 wind-tunnel test hours to define vehicle flying characteristics, recommendation of the shuttle's delta wing shape, structural and materials evaluation, launch certification of the thermal protection system, and design and analysis of the flight control and guidance systems.

Langley Today

Langley Research Center currently employs approximately 5200 people and encompasses 203 buildings on nearly 800 acres of government land. Flight tests are conducted in over 40 wind tunnels that operate at speeds up to Mach 20. The newest asset is the National Transonic Facility, a large wind tunnel in which cryogenic nitrogen is pushed through the tunnel instead of air for a more realistic transonic flight simulation.

Langley's computer complex houses one of the world's fastest supercomputers and various sophisticated laboratories are equipped for research in fields ranging from computer science and advanced materials to acoustics and optics. Researchers design sensors, communications equipment, and data handling systems for space use; investigate the effects of heat, vacuum, noise, and meteoroid

impact on space vehicles; and develop advanced composites, thermal control systems, and improved electronics. One result is the more than 500 technical reports and articles published by the center's researchers annually. Some of the center's current projects include:

National AeroSpace Plane (NASP) Development. This joint program of the Department of Defense, NASA, and



A multiple exposure captures the movement of the Lunar Excursion Module, a manned simulator designed by Langley to train Apollo astronauts.

US industry, supports development of a vehicle that will take off horizontally like an airplane, accelerate to about 17,500 mph (25 times the speed of sound) and reach low-Earth orbit. While in orbit, the plane could repair satellites or deploy payloads to the space station, and then return for a runway landing on Earth. Langley investigators employ supercomputer-generated simulations of high-speed wind tunnel tests to study engine nozzle performance and exhaust effects on tail surfaces.

HL-20 Personnel Launch System.

The HL-20 is Langley's candidate for a compact space vehicle to transport up to 10 astronauts and small cargo to and from low-Earth orbit, allowing rapid, affordable manned access to space. The vehicle is intended to complement the space shuttle and, as currently conceived, would be launched from an



The cockpit of Langley's Transport Systems Research Vehicle displays data from an advanced-warning system for wind shear.

expendable booster and be capable of runway landings. With its wings folded, it could fit within the space shuttle's payload bay. Lacking the shuttle's main propulsion engines, the HL-20 would also offer enhanced crew safety.


Wind Shear Detection. Research at Langley's Wind Shear Program Office addresses the FAA mandate requiring all commercial aircraft to have onboard wind shear detection systems by the end of 1993. The FAA seeks sensors that will provide 20-40 second advanced warning of potentially dangerous wind shears caused by strong divergent winds, thereby allowing the aircraft's crew sufficient time to take corrective action. The office has flight-tested two forward-looking wind shear sensors based on Doppler radar and infrared technologies; tests of a third, laser-based LIDAR system are underway this summer in Denver, CO and Orlando, FL.

Wide-Screen Displays for Cockpit Research. Recent advances in computer graphics have made possible large-screen, integrated stereo displays useful in enhancing pilot and aircraft performance as well as safety. Langley has installed a 15" x 40" high-definition cockpit display in a ground simulator to

assess pilot awareness.

Global Environment Studies. Major efforts are underway to analyze the global climate, focusing on such phenomena as holes in the ozone layer. Ground-breaking cloud radiation research included a Langley-led expedition this June by nearly 300 atmospheric scientists from eight countries to the Eastern Atlantic region between the Azores and Madeira Islands. Called the Atlantic Stratocumulus Transition Experiment (ASTEX), it collected information on the puffy, layered clouds in the region to assess their effects on the atmosphere and ocean. Analysis of the data is expected to yield refinements in computer models used to predict worldwide weather patterns.

Langley researchers also devised the Halogen Occultation Experiment (HALOE), an atmospheric satellite deployed by the space shuttle in 1991. HALOE is intended to provide global-scale data on temperature, ozone, and other gases to better understand the chemistry, dynamics, and radiative processes of the middle atmosphere. Other atmospheric satellite studies include the

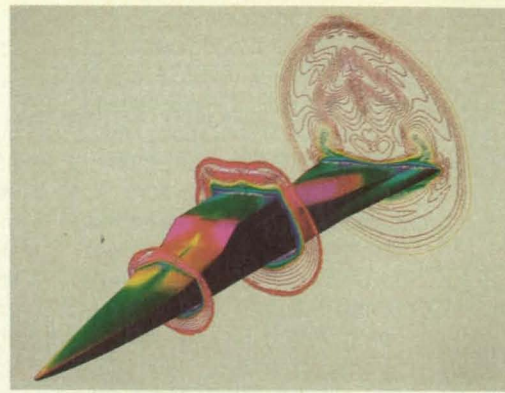

Engine exhaust is modeled in this supercomputer-generated image of an aerospace vehicle as part of the National AeroSpace Plane (NASP) Program.

Earth Radiation Budget Experiment, which gathers information on the radiation effects of clouds, and the Stratospheric Aerosol and Gas Experiment, which measures ozone and aerosol concentrations in the upper atmosphere. Langley researchers plan a number of future experiments for the Earth Observing System Polar Orbiting Satellite and the space station to further advance our knowledge of the global impact of natural and man-made phenomena. □

Time Code Instrumentation

MANY ITEMS ON GSA!

Professionals in many disciplines rely on recorded time code as a primary reference in data correlation and control applications. For nearly 20 years we've supplied quality timing instrumentation to customers in fields as diverse as entertainment, medical research, flight test and deep space exploration.


Datum produces a comprehensive line of timing instrumentation products, from rack mounted units designed for moderate environments, to ruggedized equipment for airborne, shipboard and mobile applications. Manufactured to commercial standards or military specifications requiring QPL certification, these instruments include time code translators and generators, tape search units, digital clocks and displays. A host of options enables the designer to maintain cost effectiveness while achieving optimum system configuration.

We also design and manufacture complete range timing systems to customer specifications.

For more information or applications assistance, call or write.

datum inc
Timing Division

1363 S. State College Blvd., Anaheim, CA 92806-5790
(714) 533-6333

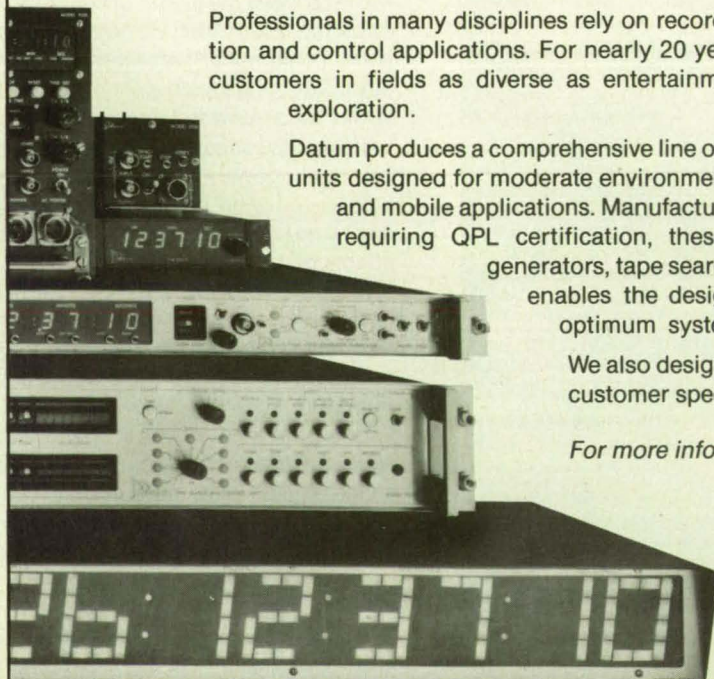

Congratulations

NASA Langley For 75 Years Of Scientific And Technical Excellence

We salute you on the occasion of your 75th anniversary and are proud to be part of your continuing leadership in aeronautics and space technology. We look forward to extending our partnership with you into the next century to ensure that our nation achieves its future aerospace goals.

**MCDONNELL
DOUGLAS**





New Product Ideas

New Product Ideas are just a few of the many innovations described in this issue of *NASA Tech Briefs* and having promising commercial applications. Each is discussed further on the referenced page in the

appropriate section in this issue. If you are interested in developing a product from these or other NASA innovations, you can receive further technical information by requesting the TSP referenced

at the end of the full-length article or by writing the Technology Utilization Office of the sponsoring NASA center (see page 20). NASA's patent-licensing program to encourage commercial development is described on page 20.

Computer Jet-Engine-Monitoring System

A developmental system would reduce the difficulty of monitoring turbofan engines in flight. The system will distill and display

critical engine data on one screen and would alert the engineer if abnormal conditions develop. (See page 35)

Barrier/ n/n^+ Varactor Frequency Multipliers

These solid-state frequency multipliers would offer increased efficiency at millimeter and submillimeter wavelengths. The devices would feature Mott or heterojunction barriers and back-to-back diode configuration, which would make it possible to obtain symmetrical capacitance-versus-voltage characteristics with a high ratio between the maximum and minimum capacitances. (See page 28)

Making Crystal Filaments From Extruded Ceramic Rods

Ceramic or metal fibers can be extruded into rods 0.01 to 0.05 in. (0.25 to 1.27 mm) in diameter at a significantly lower cost than in an earlier method of preparing the rods from hot-pressed full-density disk. The filaments can be used as reinforcing fibers in composite materials. (See page 68)

Helicopter Rotor Blade With Free Tip

Free-tip rotor blades significantly improve fuel efficiency and other performance characteristics of helicopters. Tests on a scale model demonstrated 12 percent reduction in power requirement at cruise speeds. More savings are anticipated at higher speeds. (See page 62)

Tangential-Entry Injector With Internal Reed Valve

A liquid-spray-injecting device features a designed pressure drop versus rate of flow to help in metering the flow. Potential application is in fuel-injection systems. (See page 56)

Improved Raman-Emission Detector

Use of a paraboloidal mirror and collecting lens is one of several improvements that has increased the sensitivity of Raman-emission detector. The new detector also features improved flow geometry that reduces stabilization time. (See page 41)

DERIVE[®] a compact card.



DERIVE[®], A Mathematical Assistant is now available for palmtops through 486-based PCs.

The DERIVE[®] program solves both symbolic and numeric problems, and it plots beautifully too.

- Symbolic math from algebra through calculus.
- Plots in both 2-D and 3-D.
- Simple, letter-driven menu interface.
- Solves equations exactly.
- Understands vectors and matrices.
- Split or overlay algebra and plot windows.
- Displays accepted math notation.
- Performs arithmetic to thousands of digits.
- Simplifies, factors and expands expressions.
- Does exponential, logarithmic, trigonometric, hyperbolic and probability functions.
- Taylor and Fourier series approximations.
- Permits recursive and iterative programming.
- Can generate Fortran, Pascal and Basic statements.

System requirements

PC version: MS-DOS 2.1 or later, only 512Kb RAM and one 3.5" or 5.25" disk drive. Suggested retail price is \$250.

ROM-card version: Hewlett-Packard 95LX Palmtop computer. Suggested retail price: \$289.

Contact Soft Warehouse for a list of dealers. Or, ask at your local computer store, software store or HP calculator dealer. Dealer inquiries are welcome.

2000 Years of Mathematical Knowledge on a Disk

Soft Warehouse
HONOLULU • HAWAII

Soft Warehouse, Inc. • 3660 Waiialae Ave.
Ste 304 • Honolulu, HI, USA 96816-3236
Ph: (808) 734-5801 • Fax: (808) 735-1105

DERIVE is a registered trademark of Soft Warehouse, Inc.

You Know *SigmaPlot*®.



Scientific Graphing Software

Over 30,000 researchers have made SigmaPlot® their choice for creating publication quality technical graphs. Why? Because unlike business graphing packages, SigmaPlot offers an extensive range of true scientific features including automatic error bars, huge data set handling, axis breaks, regression lines, confidence intervals, mathematical transforms, non-linear curve fitting and more!

Add to this powerful data analysis, interactive graphics editing, and comprehensive output and export options, and you can see for yourself why SigmaPlot is the number one choice worldwide for creating outstanding scientific graphs and charts.

For the PC and the Mac

PC Information Circle No. 630

MAC Information Circle No. 635

Now meet the rest of the Jandel family!

Jandel Scientific offers a full line of software tools to enhance and improve the quality of your research.

As with SigmaPlot, Jandel stands behind all of its products with free, unlimited technical support, extensive documentation and an unconditional money-back guarantee. Call us today for a FREE brochure on any of our products!

800-874-1888

(toll-free in U.S.)



Jandel
SCIENTIFIC
"Microcomputer Tools for the Scientist"

2591 Kerner Blvd., San Rafael, CA 94901
PH: 415-453-6700 • FAX: 415-453-7769

In Europe: Schimmelbuschstraße 25,
4006 Erkrath, Germany
PH: +02104/36098 • FAX: +02104/33110


TableCurve™

Automated Curve Fitting Software

TableCurve™ offers a truly automated solution to the time consuming task of curve fitting. Fit and rank over 3,300 equations to your x-y dataset - in one highly automated step! View each ranked equation individually as a graph and data tables. Choose from a variety of output options.

IBM PC Compatibles

For More Information Circle No. 632

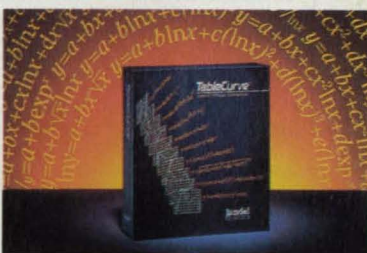


PeakFit™

Chromatography/Spectroscopy Analysis Software

By using sophisticated non-linear curve fitting techniques, PeakFit™ allows scientists to more effectively separate and characterize unresolved peak data. Analysis includes complete peak characterization (amplitude, area, center, width, asymmetry, etc.) plus all parameter and fit statistics.

IBM PC Compatibles

For More Information Circle No. 634

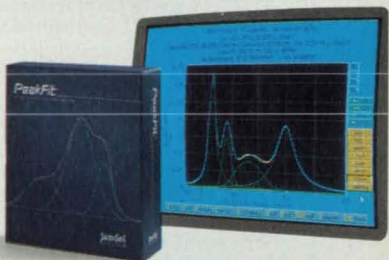

Java®

Video Analysis Software

JAVA® brings the power of mainframe and minicomputer image analysis to PC computers, at a fraction of the cost! Designed to automate a variety of research and analysis tasks, JAVA integrates image processing, object counting, morphometry and data analysis capabilities into one powerful package.

IBM PC Compatibles

For More Information Circle No. 631



SigmaScan™


Scientific Measurement Software

No more planimeters, rulers and calculators. With SigmaScan™ and a digitizing tablet, you can digitize, measure, and analyze your strip-charts, X-rays, maps and more in seconds! Manipulate and analyze data extensively within the huge, built-in worksheet. Fast, accurate and easy-to-use, SigmaScan saves hours over manual measurement methods.

IBM PC Compatibles

For More Information Circle No. 633





HOW YOU CAN BENEFIT FROM NASA'S TECHNOLOGY UTILIZATION SERVICES

If you're a regular reader of TECH BRIEFS, then you're already making use of one of the low-and no-cost services provided by NASA's Technology Utilization (TU) Network. But a TECH BRIEFS subscription represents only a fraction of the technical information and applications/engineering services offered by the TU Network as a whole. In fact, when all of the components of NASA's Technology Utilization Network are considered, TECH BRIEFS represents the proverbial tip of the iceberg.

We've outlined below NASA's TU Network—named the participants, described their services, and listed the individuals you can contact for more information relating to your specific needs. We encourage you to make use of the information, access, and applications services offered by NASA's Technology Utilization Network.

How You Can Access Technology Transfer Services At NASA Field Centers:

Technology Utilization Officers & Patent Counsels—Each NASA Field Center has a Technology Utilization Officer (TUO) and a Patent Counsel to facilitate technology transfer between NASA and the private sector.

If you need further information about new technologies presented in *NASA Tech Briefs*, request the Technical Support Package (TSP). If a TSP is not available, you can contact the Technology Utilization Officer at the NASA Field Center that sponsored the research. He can arrange for assistance in applying the technology by putting you in touch with the people who developed it. If you want information about the patent status of a technology or are interested in licensing a NASA invention, contact the Patent Counsel at the NASA Field Center that sponsored the research. Refer to the NASA reference number at the end of the Tech Brief.

Ames Research Ctr.
Technology Utilization
Officer: Geoffrey S. Lee
Mail Code 223-3
Moffett Field, CA 94035
(415) 604-4044
Patent Counsel:
Darrell G. Brekke
Mail Code 200-11
Moffett Field, CA 94035
(415) 604-5104

Lewis Research Center
Technology Utilization
Officer: Anthony F.
Ratajczak
Mail Stop 7-3
21000 Brookpark Road
Cleveland, OH 44135
(216) 433-5568
Patent Counsel:
Gene E. Shook
Mail Code LE-LAW
21000 Brookpark Road
Cleveland, OH 44135
(216) 433-5753

**John C. Stennis
Space Center**
Technology Utilization
Officer: Robert
Barlow
Code HA-30
Stennis Space Center,
MS 39529
(601) 688-1929

**John F. Kennedy
Space Center**
Technology Utilization
Officer: James A.
Aliberti
Mail Stop PT-PAT-A
Kennedy Space
Center, FL 32899
(407) 867-3017
Patent Counsel:
Bill Sheehan
Mail Code PT-PAT
Kennedy Space
Center, FL 32899
(407) 867-2544

Langley Research Ctr.
Technology Utilization
Officer: Joseph J.
Mathis, Jr.
Head, TU & AO Office
Mail Stop 200
Hampton, VA 23665-5225
(804) 864-2484
Patent Counsel:
Dr. George F. Helfrich
Mail Stop 143
Hampton, VA 23665-5225
(804) 864-3221

**Goddard Space Flight
Center**
Technology Utilization
Officer: Dr. George Alcorn
Mail Code 702
Greenbelt, MD 20771
(301) 286-5810
Patent Counsel:
R. Dennis Marchant
Mail Code 204
Greenbelt, MD 20771
(301) 286-7351

Jet Propulsion Lab.
NASA Resident Office
Technology Utilization
Officer: Arif Husain
Mail Stop 180-801D
4800 Oak Grove Drive
Pasadena, CA 91109
(818) 354-4862
Patent Counsel:
Thomas H. Jones
Mail Code 180-801G
4800 Oak Grove Drive
Pasadena, CA 91109
(818) 354-5179
Technology Utilization
Mgr. for JPL: Dr. Norman L. Chalfin
Mail Stop 156-211
4800 Oak Grove Drive
Pasadena, CA 91109
(818) 354-2240

**George C. Marshall
Space Flight Center**
Technology Utilization
Officer: Ismail Akbay
Code AT01
Marshall Space Flight
Center,
AL 35812
(205) 544-2223
Patent Counsel:
Robert L. Broad, Jr.
Mail Code CC01
Marshall Space Flight
Center,
AL 35812
(205) 544-0021

**Lyndon B. Johnson
Space Center**
Technology Utilization
Officer: Dean C. Glenn
Mail Code IC-4

Houston, TX 77058
(713) 483-3809
Patent Counsel:
Edward K. Fein
Mail Code AL3
Houston, TX 77058
(713) 483-4871

NASA Headquarters
Technology Utilization
Officer: Leonard A. Ault
Code CU
Washington, DC 20546
(703) 557-5598
Assistant General
Counsel for Patent
Matters: Robert F.
Kempf, Code GP
Washington, DC 20546
(202) 453-2424

How You Can Utilize NASA's Regional Technology Transfer Centers (RTTCs) — A nationwide network offering a broad range of technical services, including computerized access to over 100 million documents worldwide.

You can contact NASA's network of RTTCs for assistance in solving a specific technical problem or meeting your information needs. The "user friendly" RTTCs are staffed by technology transfer experts who provide computerized information retrieval from one of the world's largest banks of technical data. Data bases, ranging from NASA's own data base to Chemical Abstracts and INSPEC, are accessible through the six RTTCs located throughout the nation. The RTTCs also offer technical consultation services and/or linkage with other experts in the field. You can obtain more information about these services by calling or writing the nearest RTTC. User fees are charged for information services.

REGIONAL TECHNOLOGY TRANSFER CENTERS (RTTCs)

RTTC Directors

NORTHEAST

Dr. William Gasko
Center for Technology
Commercialization
Massachusetts Technology Park
100 North Drive
Westborough, MA 01581
(508) 870-0042

MID-ATLANTIC

Ms. Lani S. Hummel
University of Pittsburgh
823 William Pitt Union
Pittsburgh, PA 15260
(412) 648-7000
(800) 257-2725 (toll-free US)

SOUTHEAST

Mr. J. Ronald Thornton
Southern Technology Application
Center
University of Florida
College of Eng.
Box 24
One Progress Boulevard
Alachua, FL 32615
(904) 462-3913
(800) 354-4832 (FL only)
(800) 225-0308 (toll-free US)

MID-CONTINENT

Mr. Gary Sera
Texas Engineering Experiment Station
Texas A&M University System
237 WERC College Station,
Texas 77843-3401
409-845-8762
800-548-1536 (toll-free US)

MID-WEST

Dr. Joseph W. Ray
Great Lakes Industrial Technology Center
25000 Great Northern Corporate Center
Suite 450
Cleveland, OH 44070-5310
(216) 734-0094

FAR-WEST

Mr. Robert Stark
Technology Transfer Center
University of Southern California
3716 South Hope Street,
Suite 200
Los Angeles, CA 90007-4344
(213) 743-6132
(800) 642-2872 (CA only)
(800) 872-7477 (toll-free US)


If you are interested in information, applications, research, training, and services relating to satellite and aerial data for Earth resources, contact NASA's transfer point for earth observing technology: **Technology Application Center, University of New Mexico, 2808 Central, S.E., Albuquerque, NM 87131-6031; Dr. Stan Morain, Director (505) 277-3622.**

If you represent a public sector organization with a particular need, you can contact NASA's Application Team for technology matching and problem solving assistance. Staffed by professional engineers from a variety of disciplines, the Application Team works with public sector organizations to identify and solve critical problems with existing NASA technology. **Technology Application Team, Research Triangle Institute, P.O. Box 12194, Research Triangle Park, NC 27709; Dr. Doris Rouse, Director, (919) 541-6980**


A Shortcut To Software: COSMIC®—For software developed with NASA funding, contact COSMIC, NASA's Computer Software Management and Information Center. New and updated programs are announced in the Computer Programs section. COSMIC publishes an annual software catalog. For more information call or write: **COSMIC®, 382 East Broad Street, Athens, GA 30602 John A. Gibson, Director, (706) 542-3265; FAX (706) 542-4807.**

If You Have a Question..NASA Center For AeroSpace Information can answer questions about NASA's Technology Utilization Network and its services and documents. The CASI staff supplies documents and provides referrals. Call, write or use the feedback card in this issue to contact: **NASA Center For AeroSpace Information, Technology Utilization Office, P.O. Box 8757, Baltimore, MD 21240-0757. Walter M. Heiland, Manager, (410) 859-5300, Ext. 245.**

NEW LDS™ 4000 PLUS SCANNER

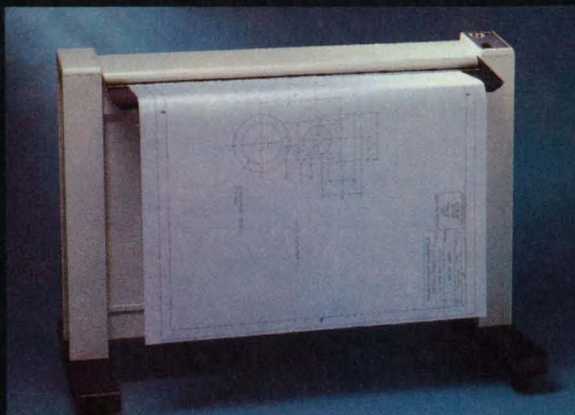


Scan it. Accurately scan a typical E-size drawing in seconds; create a raster file that can be displayed in most major PC-CAD programs.

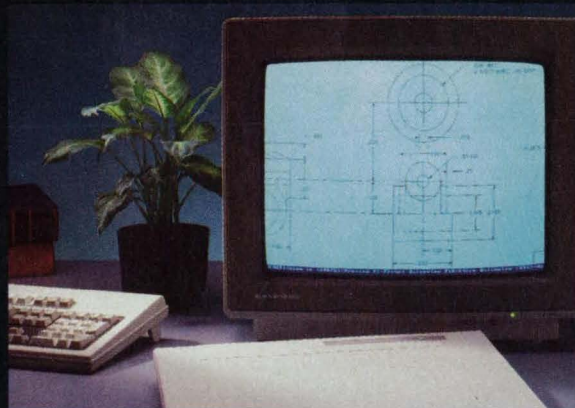


Retrieve it. No more searching for hours in the storage room. Access and view all or part of your document quickly on your PC.



Store it. Hold and manage thousands of documents on your optical or hard disk, protect against loss or damage and eliminate expensive storage costs.

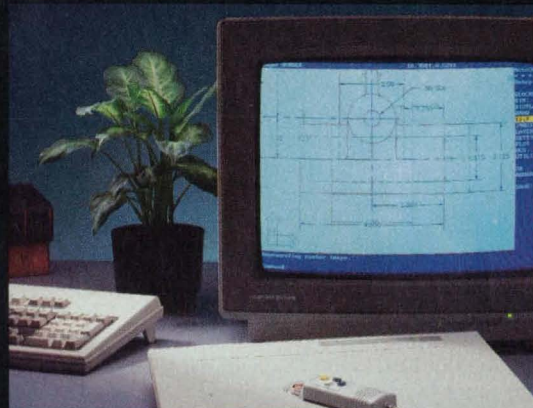

Change it. With optional software, display a raster (dot) image in your CAD program, then overtrace it and create a vector (line) image.

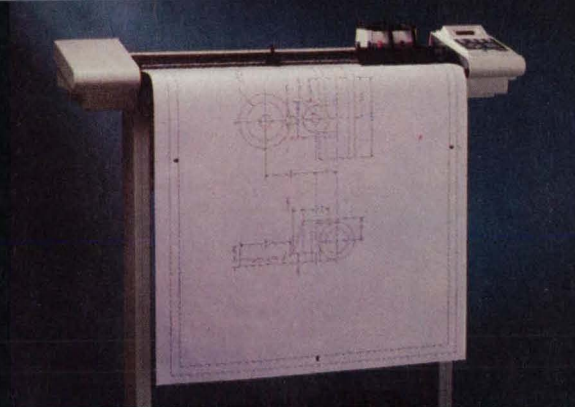

Plot it. Once scanned by the LDS 4000 Plus, you can print your document on a raster printer or plot your overtraced vector image on a plotter.

FREE LITERATURE

Please send me information on the benefits of scanning, featuring the new LDS 4000 Plus Scanner (Fill in or attach your business card).

Name: _____

Title: _____

Company: _____

Address: _____

City: _____ State: _____ Zip: _____

Phone: _____

Mail to: LDS 4000 Plus, Houston Instrument, 8500 Cameron Road, Austin, TX 78753. Or call toll-free: 1-800-444-3425

Do it. Send for our free information on the capabilities of the new LDS 4000 Plus Scanner, and how it can change the way you manage paper drawings.

HOUSTON INSTRUMENT™
A Summagraphics Company



Paraboloidal Reflector With Movable Subreflector


The subreflector is tilted and translated to compensate for gravitational distortions.

NASA's Jet Propulsion Laboratory, Pasadena, California

The subreflector of a 34-m-diameter paraboloidal radio-antenna reflector can be tilted and translated slightly to compensate partly for gravitational distortions of the antenna structure. The basic idea is simple and well known: one adjusts the position and orientation of the subreflector to focus it with respect to the phase center of the radio-frequency feed horn and the primary focus of the computed paraboloid that best fits the gravitationally distorted main paraboloidal reflector. By so doing, one restores some of the gain that is lost when the antenna is aimed at an elevation angle other than the design optimum elevation (which is 45° in this case).

The subreflector is located at the outer end of a quadripod mounted on the main reflector. The subreflector is mounted on the bottommost one of three plates, the topmost of which is connected to the quadripod at three corners by screwjacks that translate the corners along the z axis (see figure). Tilts are effected via differential z translations of the corners. The other two plates are connected to the top plate and to each other by slides and screwjacks that provide translations along the x and y axes.

Transducers indicate positions along the axes of the jacks, providing feedback for control of the position and orientation of

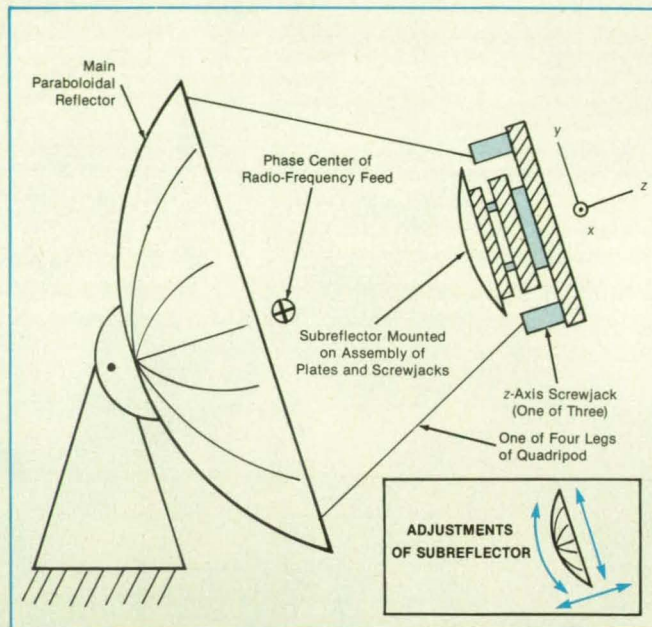

The **Position and Orientation of the Subreflector** are adjusted to compensate for gravitational distortions of the main reflector and other substructures when the elevation angle is changed. In the case of the 34-m antenna described in the text, typical adjustments upon change of elevation from 45° to 90° are of the order of millimeters.

the subreflector. A digital memory serves as an electronic lookup table that contains data on the required adjustments of the subreflector. These data are precomputed on the basis of measured and calculated gravitational distortions of the main reflector, quadripod, and other substructures as functions of the elevation angle. A signal indicative of the actual elevation angle is

fed to a microprocessor, which uses the lookup table to generate control signals that, in turn, command the screwjacks to the required positions.

This work was done by Masakazu S. Katow of Planning Research Corp. for NASA's Jet Propulsion Laboratory. For further information, Circle 163 on the TSP Request Card. NPO-18442

Capacitive Proximity Sensor Has Longer Range

Sensitivity and range are increased by use of a driven shield.

Goddard Space Flight Center, Greenbelt, Maryland

Figure 1 illustrates a robot equipped with an improved capacitive sensor to detect a nearby object (which could be a person, conductor, or dielectric insulator). The output of the sensor is fed to the robot controller to prevent a collision between the robot and the object. Whereas prior capacitive proximity sensors for this purpose had to be mounted at typical standoff distances of 1 in. (2.5 cm) from the surfaces of robot arms, this sensor can be mounted more nearly flush and still achieve ranges in excess of 1 ft (30 cm), compared to the 1-in. (2.5-cm) range of comparable industrial sensors. The sensitivity and dynamic range also has a corresponding 12-to-1 improvement.

One essential element of the sensor is a thin sheet of conductive material mount-

ed on a thin layer of electrical insulation on the electrically grounded robot arm. A second, much narrower sheet is similarly mounted on (and electrically insulated from) the first sheet. The second sheet serves as the capacitive sensing element, while the first sheet serves as an electrostatic shield between the sensing element and the robot arm. Through a voltage-follower circuit, the shield is driven at the same potential as that applied to the sensing element, without loading the source of the potential. As shown at the top of Figure 2, the driven shield alters the electric field around the sensing element. Instead of being concentrated in the gap between the sensing element and the grounded robot arm (as it would be in the absence of the driven shield), the field is

effectively squeezed out of the gap and concentrated more in the exterior space to be probed.

As shown at the bottom of Figure 2, the sensing element is part of an oscillator circuit that operates at a typical frequency of about 20 kHz. The total capacitance between the sensing element and ground constitutes the tuning capacitance of the oscillator. This total capacitance includes the approximately fixed capacitance, C_{sg} , between the sensing element and ground. It also includes the series combination of (1) the variable capacitance, C_{so} , between the sensing element and the object and (2) the variable capacitance (if any), C_{og} , between the object and ground. The object is detected via the effect of C_{so} on the frequency of oscillation.



base your important decisions on the best information possible. IHS® Military Information Services provide the world's best, most reliable databases:

DoD Standardization Service on CD-ROM. Full-text Military and Federal Specifications, Standards, Drawings and more.

HAYSTACK® System. The most comprehensive source of information on government purchased and stocked parts.

QPL Service. Full-text Qualified Products Lists and Standard Military Drawings (SMDs)—part number searchable!

Jane's Yearbooks on CD-ROM. Detailed information on military aircraft, ships, tanks and weapon systems throughout the world.

Services are available in CD-ROM, online, magnetic tape, key MicroVAX® system, microform and hardcopy formats and soon . . . Oracle® relational databases!

Free brochures and demo diskettes.

_____ 5-1/4" or _____ 3-1/2" Diskettes

_____ DoD Standardization Service on CD-ROM

_____ HAYSTACK System

_____ Jane's Yearbooks on CD-ROM

_____ QPL Service

Name: _____

Phone: _____

Title/Department: _____

Organization: _____

Address: _____

City _____ State/Country _____ Zip/Country Code _____

Mail to: Information Handling Services
Department 59 • 15 Inverness Way East
Englewood, CO 80150 USA

Or call: 800-241-7824 • 303-790-0600, ext. 59.

FAX: 303-397-2747


NTB 8/92



Information Handling Services®

For More Information Circle No. 546

Tap Into The World's Largest Technology Bank At Technology 2002

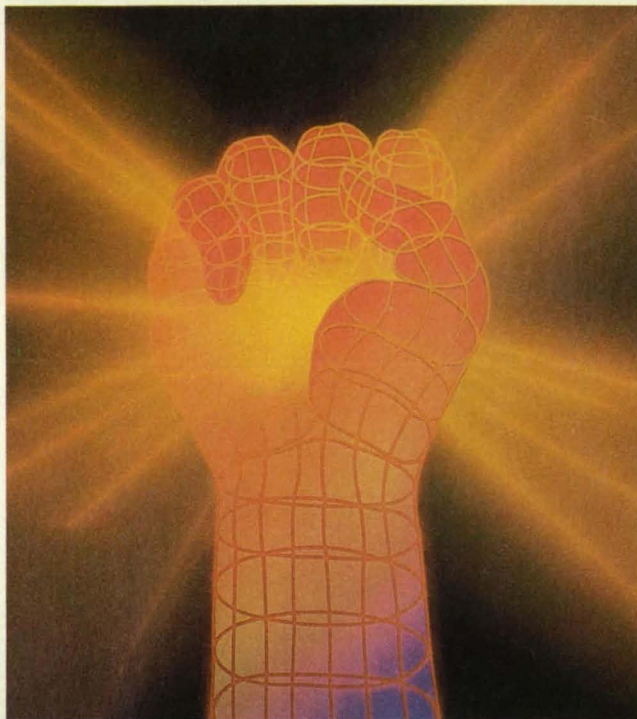

TECHNOLOGY 2002

the third national technology transfer conference & exposition
December 1-3, 1992, Baltimore, MD Convention Center

Your One-Stop Shopping Place For Innovative Ideas

More than a conference...more than a trade show...Technology 2002 is a vital resource that will put you in direct contact with the premier technology developers and tech transfer experts in federal laboratories and industry. Technology 2002 will show you how to tap into the government's \$70 billion technology storehouse and turn taxpayer-supported innovations into profitable products. And it will alert you to a wealth of patent licensing and cooperative R&D opportunities in areas defined by the White House as critical to the nation's future.

You can attend dozens of meetings this year and spend countless hours searching for new ideas to help your business grow...or you can invest three days at Technology 2002 and discover — in one place, at one time — the best technology America has to offer.

Technology 2002 will feature:

- ▲ Over 120 presentations spotlighting important new inventions in Materials, Manufacturing, Information and Communications, Biotechnology and Life Sciences, and Energy and Environment — areas selected as National Critical Technologies;
- ▲ Information-packed sessions on university-based and international technologies U.S. companies can use to bolster their competitiveness and productivity;
- ▲ A special workshop covering patent licensing, cooperative R&D agreements, and SBIR grants;
- ▲ 60,000 square feet of exhibits showcasing cutting-edge innovations available for license or sale;
- ▲ The third annual Technology Transfer Awards Dinner, offering an unparalleled opportunity to network with government leaders and industry executives in an elegant setting—the Hyatt Regency's Grand Ballroom. Norman Augustine, CEO of Martin Marietta Corp., will be the dinner speaker.

Here's just a sample of the hundreds of exciting, practical new technologies you will discover at Technology 2002:

- ▲ "Magic Bullets" For Cancer Therapy
- ▲ An Ingestible Pill That Takes Your Temperature
- ▲ A 3D Laser Measurement System For Advanced Manufacturing
- ▲ A Novel Packaging Technique That Dramatically Improves IC Performance
- ▲ Wireless Infrared Communications Technology
- ▲ A Space-Based Robotic Welder With Down-To-Earth Applications
- ▲ A Dynamic Aircraft Deicer Promising Safer Skies
- ▲ Automated Real-Time CASE Techniques
- ▲ A Multi-Media "Cyberspace" System For Virtual Reality
- ▲ A Revolutionary Dielectric Sensor Technology

Technology 2002 Program

Tuesday, Dec. 1

8:30 - 9:45 am	Welcome and Keynote Address
10:00 am - 12:00 pm	National Critical Technologies (6 Tracks)
1:00 - 3:00 pm	National Critical Technologies
4:00 - 6:00 pm	Workshop: How To Do Business With The U.S. Government

Wednesday, Dec. 2

8:30 - 8:55 am	Wednesday Keynote Address
9:00 - 11:00 am	National Critical Technologies (6 Tracks)
1:00 - 3:00 pm	National Critical Technologies
4:00 - 6:00 pm	University Technology Transfer Opportunities (Track #1)
	International Technology Forum (Track #2)
7:00 - 10:00 pm	Technology Transfer Awards Dinner

Thursday, Dec. 3

8:30 - 8:55 am	Thursday Keynote Address
9:00 - 11:00 am	National Critical Technologies (6 Tracks)
1:00 - 3:00 pm	University Technology Transfer Opportunities (Track #1)
	International Technology Forum (Track #2)

Exhibit Hall Hours

Dec. 1-3: 10:00 am - 5:00 pm

Preregister and Save

Mail your completed preregistration form with check or money order (if applicable) payable to the Technology Utilization Foundation, or fax it with credit card data to (212) 986-7864. To register by phone, call (800) 944-NASA. Government organizations may register using a purchase order. Deadline for preregistration is November 20.

Choose from four types of registrations:

- ▲ Complete registration—includes symposia, workshops, and exhibits for all three show days; tickets to the opening reception on Monday evening, Nov. 30 and to the Awards Dinner on Wednesday, Dec. 2; and a set of the official Technology 2002 proceedings;
- ▲ Three-Day Symposia/Exhibits—covers symposia, workshops, and exhibits Tuesday through Thursday;
- ▲ One-Day Symposia/Exhibits;
- ▲ Exhibits Only.

Early-Bird Bonus: The first 100 paid registrants will receive a complimentary Technology 2002 T-shirt.

	By 11/20	On-Site
Complete Registration	\$240	\$285
Three-Day Symposia/Exhibits	\$150	\$195
One-Day Symposia/Exhibits	\$75	\$95
Exhibits Only	— No Charge —	

Additional tickets to the Awards Dinner may be purchased for \$95 using the preregistration form or by calling (800) 944-NASA.

Special Hotel Discounts

Hotel space is limited, so act early to secure these special conference rates:

	single	double
Hyatt Regency (headquarters hotel) (800) 233-1234	\$103	\$115

Holiday Inn (301) 685-3500	\$63	\$64
-------------------------------	------	------

Omni Inner Harbor (800) 843-6664	\$63	\$63
-------------------------------------	------	------

The Hyatt is connected by walkway to the convention center; the other hotels are in easy walking distance. When making reservations, you must identify yourself as a participant in the Technology 2002 conference to receive the special rates.

For more information about Technology 2002, or to find out how your company can exhibit at this important national event, call Wendy Janiel or Joseph Pramberger at (800) 944-NASA.

Technology 2002 Preregistration Form

Use a separate form or photocopy for each registrant.

Name _____

Title _____

Company _____

Address _____

City/St/Zip _____

Phone No. _____

☐ check enclosed ☐ bill my: ☐ AmEx ☐ VISA ☐ Mastercard

Account No. _____ Expire Date _____

Signature _____

check one:

- ☐ Complete Registration \$240
- ☐ Three-Day Symposia/Exhibits \$150
- ☐ One-Day Symposia/Exhibits \$75
(circle day: Tues. Wed. Thurs.)
- ☐ Exhibits Only Free
(circle day(s): Tues. Wed. Thurs.)
- ☐ Awards Dinner only \$95
(number of tickets: _____)

Total: \$ _____

Registrations and Awards Dinner reservations are transferable, and may be cancelled until November 20, 1992 subject to a \$50 cancellation fee. After that date no cancellations will be accepted and no money refunded.

**Return with payment to: Technology Utilization Foundation,
41 East 42nd Street, Suite 921, New York, NY 10017**

Figure 1. The **Capacitive Proximity Sensor** on the robot arm detects a nearby object (which could be a person) via the capacitive effect of the object on the frequency of an oscillator.


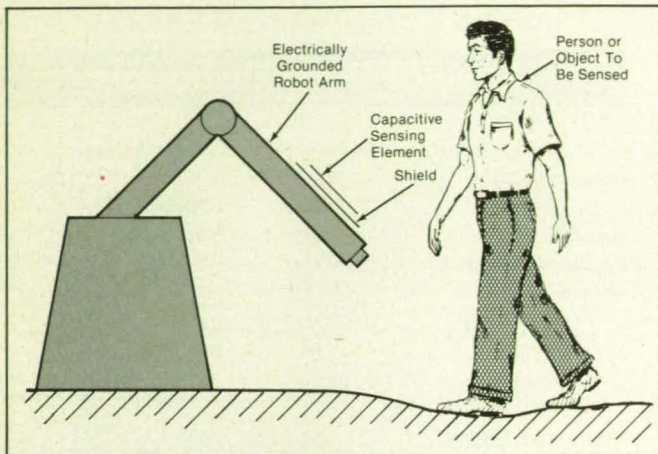


Figure 2. The **Sensor Circuit** includes a shield driven by a replica of the alternating voltage applied to the sensing element. The driven shield concentrates the sensing electrostatic field in the exterior region to enhance sensitivity to the object

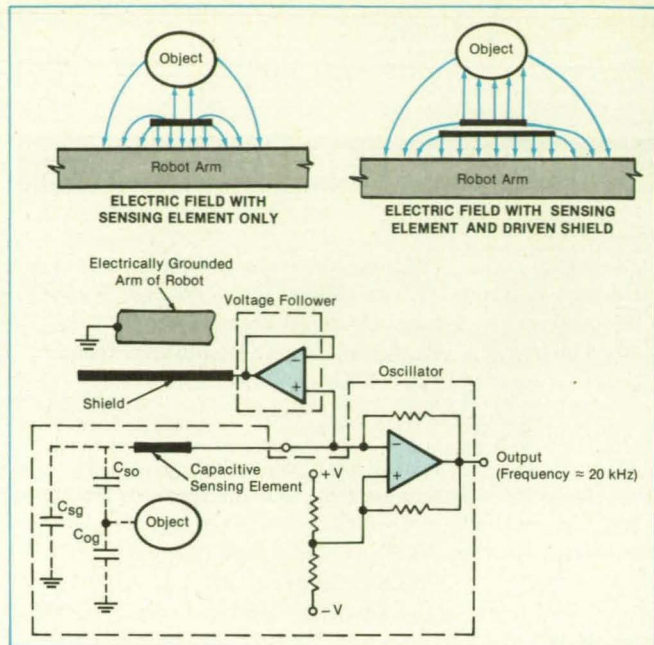

The alteration of the electrostatic field greatly diminishes C_{sg} and increases C_{so} somewhat. Thus, C_{so} becomes a greater fraction of the total capacitance, with a correspondingly proportional increase in its effect on the frequency of oscillation. In a typical case, the result is an increase

in the range at which an object can be sensed, from about 1 in. (2.5 cm) to about 12 in. (30 cm).

This work was done by John M. Vranish of **Goddard Space Flight Center**. For further information, Circle 136 on the TSP Request Card.

This invention is owned by NASA, and a patent application has been filed. Inquiries concerning nonexclusive or exclusive license for its commercial development should be addressed to the Patent Counsel, Goddard Space Flight Center [see page 20]. Refer to GSC-13377.

Determining Extinction Ratio of a Laser Diode

Background light and nonideality of laser pulses are taken into account.

Goddard Space Flight Center, Greenbelt, Maryland

An improved technique for determining the extinction ratio of a pulsed laser diode is based partly on a more-realistic definition of the extinction ratio applicable to nonideal laser pulses. Heretofore, most such determinations involved the assumption of ideal (that is square-wave) laser pulses, and, in some cases, neglect of the optical power from background light.

Figure 1 illustrates the ideal and non-ideal cases. The extinction ratio, R , is defined by $R = (P_{on} - P_{bk}) / (P_{off} - P_{bk})$, where P_{on} is the output power of the laser in a pulse of duration T , P_{off} is the output power of the laser in the absence of a pulse, and P_{bk} is the power of background light. These powers are computed from the corresponding output voltages V_{on} , V_{off} , and V_{bk} of an amplifier connected to a photodiode at which the laser beam is aimed.

Because the power fluctuates during a real pulse, it is more realistic to define the extinction ratio in terms of the energy obtained by integrating the power over the pulse interval (for P_{on}) of duration T , during an interval of duration T when the laser is operating under dc bias but the pulse is not applied (for P_{off}), and during an interval of T when the light from the laser is blocked, allowing the photodiode to re-

ceive only background light. Then the extinction ratio is defined by

$$R = \frac{\left[\int_T P_{on}(t) dt - \int_T P_{bk}(t) dt \right]}{\left[\int_T P_{off}(t) dt - \int_T P_{bk}(t) dt \right]}$$

where t = time. If P_{bk} and P_{off} are constant, then the equation becomes simply

$$R = \frac{\left[\frac{1}{T} \int_T P_{on}(t) dt - P_{bk} \right]}{(P_{off} - P_{bk})}$$

Figure 2 illustrates an apparatus used to measure the extinction ratio of a laser diode. The laser beam is directed through an interference filter (which transmits light in a passband centered on the laser wavelength), then focused by a lens onto a positive/intrinsic/negative photodiode. The pho-


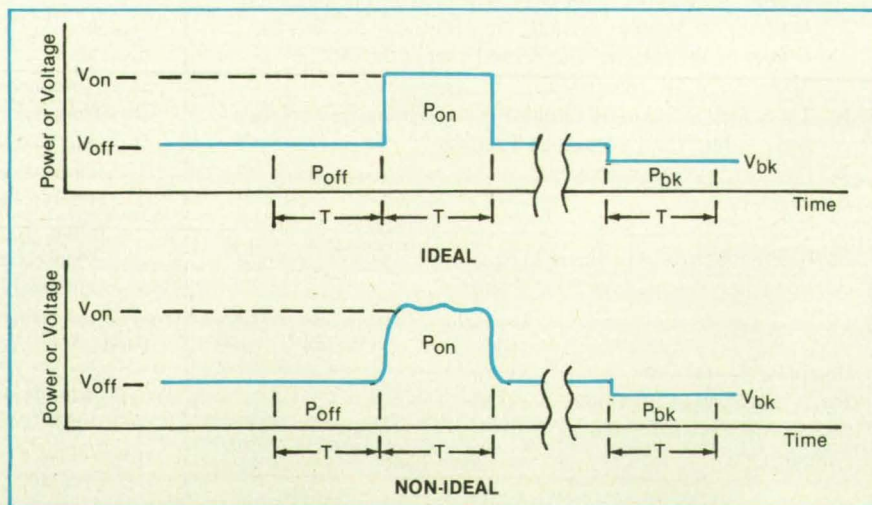


Figure 1. These **Ideal and Nonideal Waveforms** show the relationships among P_{on} , P_{off} , P_{bk} and the corresponding voltages V_{on} , V_{off} , and V_{bk} .

WE POWER YOUR STRONGEST IDEAS.

When Techron began making power amplifiers in 1951, they had no idea how its technology would come to impact human life. What began as a power source for the music industry grew into the wellspring for some of mankind's greatest achievements and most exciting new developments. A pathway to which Techron is now fully dedicated.

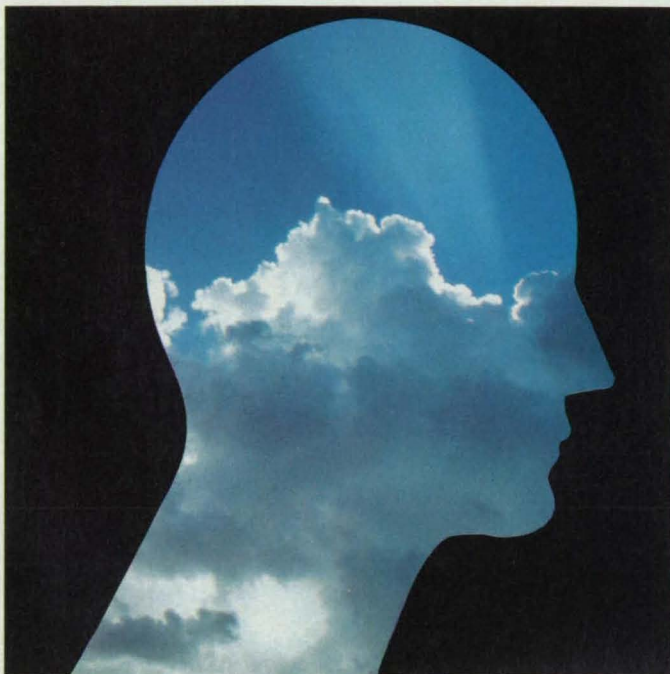

medical procedures safer and less painful. The clean, steady reliability of Techron power is there.

Techron's influence has been truly far-reaching. In chemical analysis, expanding the ways X-rays create images. Guiding new ways of thinking in space exploration. Powering oil exploration. Vi-

bration test systems. Quality assurance testing for transformers, capacitors and cable harnesses. Recycling methods. Radar installations. Automotive research for safer vehicles of the future. Safer mining by underground signalling. Particle acceleration studies. Noise-reduction research. Distance relay safety testing for sensing faults in high-tension wires. And currently, testing and setting the standards for the Electrical Power Regulatory Institute.

It started with a product: Strong, clean, reliable power amplifiers. But it grew to fuel a generation of strong new ideas that not only are improving our lives today, but building a better future. We're proud to be a part of it. And we're committed to staying here. Right behind your greatest ideas.

Since then, the Techron spark of ingenuity has helped pave numerous inroads to a better way of life. After MRI applications came many exciting new fields of research. Most recently, research to make other

TECHRON

1718 W. Mishawaka Road Elkhart, Indiana 46517

Call (219) 294-8300

Techron is a division of Crown® International Inc.

For More Information Circle No. 671

THE ADVANCED
INDUSTRY STANDARD


DC/DC converters

COMPARE APEX FOR:

Quality
Lower Per Unit Costs
High MTBF
Lifetime Warranty
Temperature Range
Applications Support

ADVANCED MANUFACTURING YIELDS HIGH RELIABILITY CONVERTERS

By using a multilayer substrate and a one-step reflow solder process, our hybrid manufacturing process yields a lower cost dc/dc converter that's extremely reliable and rugged with no PIND failures.

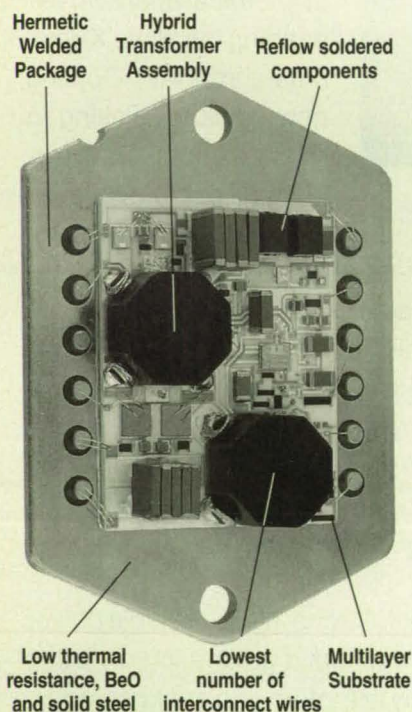

DB2800 SERIES

20W Singles	20W Duals
Input:	Input:
14-50V	14-50V
Output:	Output:
5V, 12V, 15V	±12V, ±15V



APEX MICROTECHNOLOGY CORPORATION
5980 N. Shannon Road, Tucson, AZ 85741
For Product Information or
Applications Assistance Call
1-800-862-1032 or FAX (602) 888-3329

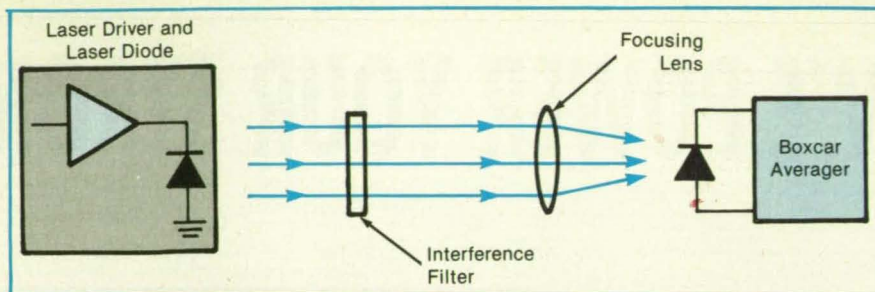


Figure 2. This Apparatus Measures the Optical Energies conveyed by the laser beam during pulse intervals T long, conveyed by the laser beam during no-pulse intervals T long, and conveyed by background light during intervals T long.

todiode is chosen to have a bandwidth (with respect to output electrical signals) greater than that of the amplitude modulation of the laser beam. A boxcar averager processes the output of the diode, integrating the appropriate amplified voltages

over time to obtain $\int_T P_{on}(t)dt$, $\int_T P_{bk}(t)dt$, and $\int_T P_{bk}(t)dt$.

This work was done by Glenn L. Unger of Goddard Space Flight Center. No further documentation is available.
GSC-13413

Barrier/ n/n^+ Varactor Frequency Multipliers

Solid-state frequency multipliers offer increased efficiency at millimeter and submillimeter wavelengths.

NASA's Jet Propulsion Laboratory, Pasadena, California


Barrier/ n/n^+ (BNN+) varactor diodes are being developed for use as frequency multipliers at millimeter and submillimeter wavelengths. Typical devices of this type would be required to serve as frequency triplers or quintuplers to provide powers of the order of milliwatts at frequencies from 0.1 THz to about 1 THz.

The BNN+ concept is an extension of the barrier/intrinsic/ n^+ (BIN+) concept described in "BIN Diode for Submillimeter Wavelengths" (NPO-17258), NASA Tech Briefs, Vol. 13, No. 1 (January 1989), page 24. Like BIN+ varactor diodes and unlike Schottky-barrier varactor diodes, the BNN+ devices feature Mott or heterojunction barriers and a back-to-back diode configuration, which make it possible to obtain symmetrical capacitance-versus-voltage characteristics with a high ratio between the maximum and minimum capacitances. This concept can be implemented by fabricating the back-to-back diodes in a planar configuration with no need to provide ohmic contacts between them and no need for bias voltage. In the version shown in the figure, each diode includes a barrier layer 20 to 30 nm thick, a drift layer 100 to 150 nm thick, and an n^+ layer, which serves as the back contact between the two diodes.

In the BIN+ case, the drift region is intrinsic, so that electrons injected from the n^+ back contact carry space-charge-limited current with a frequency response limited by transit time. In this case, the capacitance-versus-voltage characteristic


includes a sharp transition between the maximum and minimum capacitances, enabling generation of high harmonic content suitable for triplers, quintuplers, and the like at low powers.

Numerical simulations have shown that the power would be maximized if the half width of the central peak in the capacitance-versus-voltage curve were about one-fifth of the maximum voltage. This could be achieved by proper sheet doping between the barrier and the drift re-

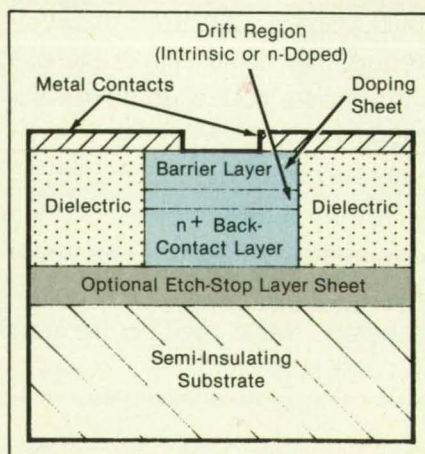

Back-to-Back BIN+ or BNN+ Diodes constitute a frequency-tripling varactor. In the BNN+ case, the drift region is n-doped. The optional etch-stop layer provides for the removal of the substrate to minimize the parasitic capacitance and the transmission-line losses of the leads.

Think of it as a mathematical playground for your mind.

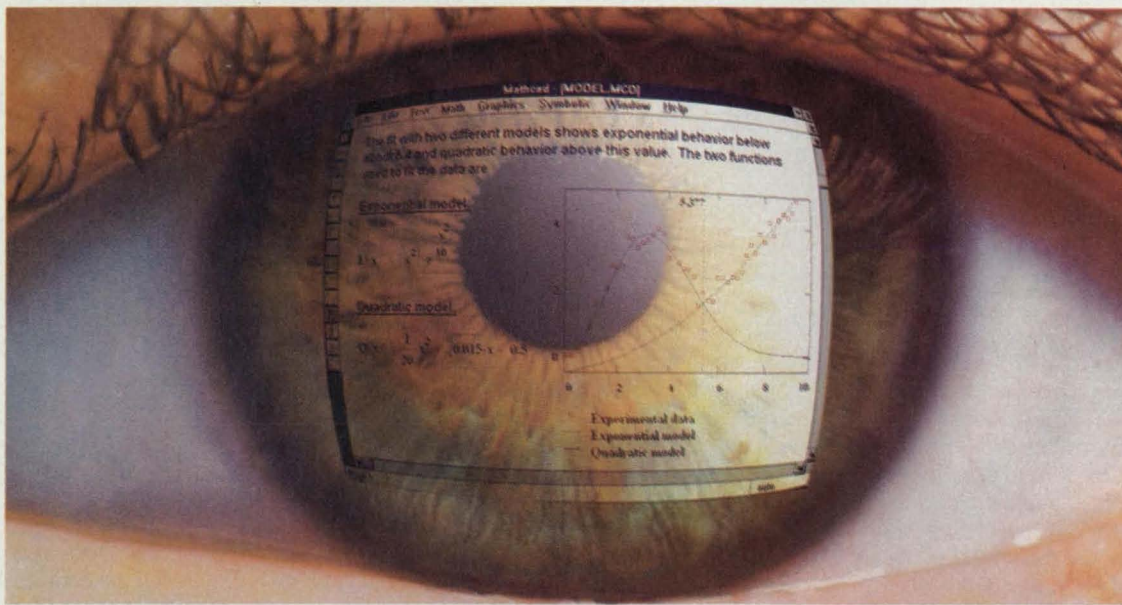

Open up a whole new world of scientific and engineering problem solving with Mathcad 3.1.

Between the challenge of new problems and the reward of new solutions there is math. Often, a lot of math.

Which is why we make Mathcad.

It's the remarkable software that gives you the power to perform everything from simple arithmetic to advanced computational gymnastics more quickly, easily and naturally than with calculators, spreadsheets or programming alone.

You use Mathcad just like a scratch

pad. Simply type your work anywhere in the live screen and Mathcad does the calculating. Change variables and Mathcad automatically updates the answers. It plots in 2-D and 3-D. And prints your results, complete with text and graphics, in presentation quality documents.

Plus you see your work more clearly because Mathcad uses the same math notation you would use with a pencil and paper.

It's the complete math system.

Mathcad comes with more than 200 commonly used functions that let you quickly build even complex equations and formulas

with exponentials, differentials, cubic splines, FFTs and more.

Full symbolic calculation capabilities are available with a menu pick. So you can evaluate any integral, Taylor series or infinite sum just by clicking.

Optional Electronic Handbooks* give you instant access to data, formulas and diagrams once found only in reference books. They're fully interactive. Just click and paste them right into your document and work with them like any other text, value, table or formula. Or work with them right in the handbook itself.

Plus optional Applications Packs with modifiable templates are available for all major engineering and science fields.

Over 200,000 satisfied users.

Each day, more engineers, scientists and other technical professionals discover that Mathcad opens up a whole new world of freedom in problem solving, and helps them manage their time more efficiently.

Which is why in addition to being the most popular math software you can buy, it is also the most productive.

- Microsoft® Windows,™ Motif and Open Look interfaces make Mathcad easy to learn and use
- Optional Electronic Handbooks include The CRC Materials Science and Engineering Handbook,

NOW
UNIX 3.1
AVAILABLE

Machine Design and Analysis from the *Standard Handbook of Engineering Calculations* (McGraw-Hill), and the Mathcad Treasury of Methods and Formulas

- Optional Signal Processing Function Pack contains over 60 functions including FIR and IIR filter coefficients and power spectrum

- Optional Applications Packs with adaptable templates for Electrical, Mechanical, Civil and Chemical Engineering, Statistics, Advanced Math, and Numerical Methods
- PC Windows, PC DOS, UNIX® and Macintosh® versions available

Free demo disk.

For a free Mathcad demo disk, or upgrade information, call 1-800-628-4223, (or 617-577-1017, Fax: 617-577-8829).

Or see your software dealer.

*Electronic Handbooks require Mathcad 3.1.

© 1992 MathSoft, Inc. TM and ® signify manufacturer's trademark or registered trademark respectively.



1-800-MATHCAD

The answer is Mathcad®

gion. The maximum voltage is, in turn, determined by the onset of Fowler-Nordheim tunneling through the barrier, and this excludes the use of a simple Mott barrier for power applications.

The foregoing considerations led to the BNN+ concept, in which bulk doping (around $10^{17}/\text{cm}^3$) is added to the drift region. In this case, the current is no longer space-charge-limited and the frequency response is improved. The frequency response would approach the dielectric-relaxation limit, if it were not limited by the onset of electron-velocity saturation and

the parasitic resistance of the n^+ region. The central peak in the capacitance-versus-voltage curve becomes less sharp than for the BIN diode, with slowly varying depletion tails. This situation is advantageous for high-power triplers.

Likely subjects for development in the near future include SiO_2/Si and $\text{Al}_x\text{Ga}_{1-x}\text{As}/\text{GaAs}$ devices to be tested as waveguide triplers to produce 5 mW at 200 GHz. A quasi-optically-coupled array of triplers integrated with an antenna structure has also been considered.

This work was done by Udo Lieneweg,

Timo J. Tolmunen, Margaret A. Frerking, and Joseph Maserjian of Caltech for NASA's Jet Propulsion Laboratory. For further information, Circle 103 on the TSP Request Card.

This invention is owned by NASA, and a patent application has been filed. Inquiries concerning nonexclusive or exclusive license for its commercial development should be addressed to the Patent Counsel, NASA Resident Office-JPL [see page 20]. Refer to NPO-18428.

Equations for Designing Superconducting Transmission Lines

Characteristics of microwave circuits can be predicted accurately.

NASA's Jet Propulsion Laboratory, Pasadena, California

Equations for the propagation of quasi-transverse electric and magnetic (TEM) waves along thin films made of high-critical-temperature superconductors constitute the basis of a mathematical model useful in the design of coplanar-waveguide, microstrip, and stripline microwave circuits made with such films. The model can be incorporated readily into older commercial software for the computer-aided design of microwave circuits, which software was developed before the advent of high-critical-temperature superconductors.

The new model is needed because the electromagnetic characteristics of thin films of high-critical-temperature superconductors are more complicated than are those of ideal superconductors and of normal conductors. In particular, the major simpli-

fying assumption that the depth of penetration of the electromagnetic wave is much less than the thickness of the film is not necessarily valid for a high-critical-temperature superconductor. The additional penetration can result in additional internal impedance and can affect such important externally measurable characteristics as input and output impedances, speed of propagation, electrical length, and attenuation. Even when the small-penetration-depth assumption is valid, high-temperature superconductors behave differently from ideal superconductors and normal superconductors: whereas the surface resistance of a normal conductor is proportional to the square root of the frequency, that of a superconductor is approximately proportional to the square of the frequency.


The new model is essentially an application of phenomenological loss-equivalence approximations to the London two-fluid mathematical model of superconductivity:

$$\sigma = \sigma_1 - j\sigma_2 = \sigma_n \left(\frac{T}{T_c} \right)^4 - j \frac{1 - \left(\frac{T}{T_c} \right)^4}{2\pi f \mu_0 \lambda_0^2} \text{ at } T < T_c$$

where σ is the total conductivity, the imaginary part denotes the contribution of superconducting pairs of electrons, σ_n is the normal part of the conductivity (attributed to normal electrons), T is the absolute temperature, T_c is the critical temperature, f is the frequency, μ_0 is the magnetic permeability of free space, and λ_0 is the depth of penetration of the magnetic and electric fields into the superconductor at zero temperature. This equation for the complex conductivity can be used to derive equations for the real and imaginary components of the additional internal impedance, the attenuation, the effective wave-slowing factor (index of refraction), the corrected phase velocity of the waves, and the corrected effective dielectric constant (corrections being with respect to predictions of prior circuit theory).

The new model was tested by applying it to a low-pass filter made of yttrium barium copper oxide superconducting thin film on a lanthanum aluminate substrate. The figure gives an example of the close agreement between the predictions of the model and experimental values.

This work was done by Dimitrios Antsos of Caltech for NASA's Jet Propulsion Laboratory. For further information, Circle 80 on the TSP Request Card. NPO-18418

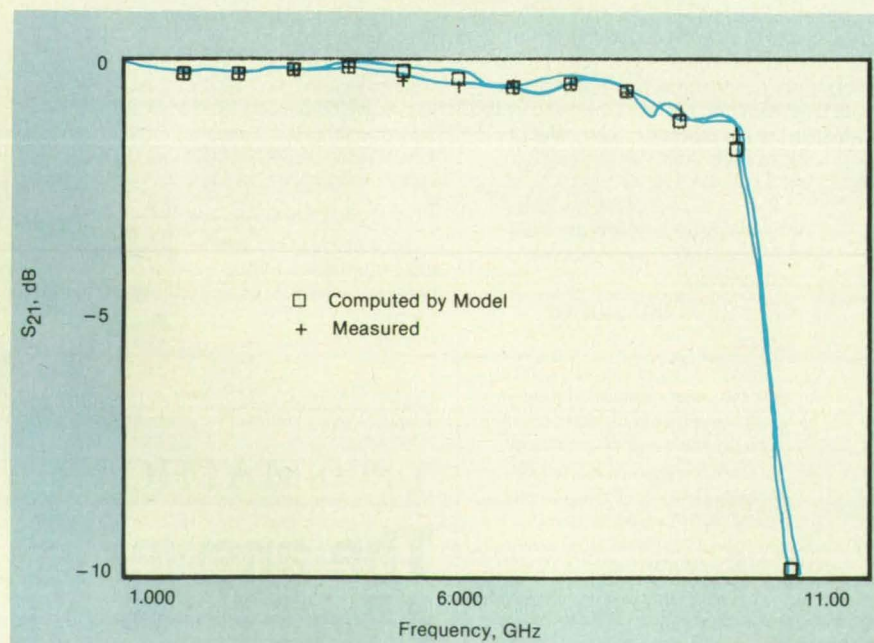


One of the Scattering Parameters (S_{21} , the coefficient of transmission from port 1 to port 2) of a low-pass filter as a function of frequency was computed by use of the model and measured.

Solid-State Power Amplifier for 61.5 GHz

Smaller, lighter units will replace larger, heavier traveling-wave-tube amplifiers.

Goddard Space Flight Center, Greenbelt, Maryland

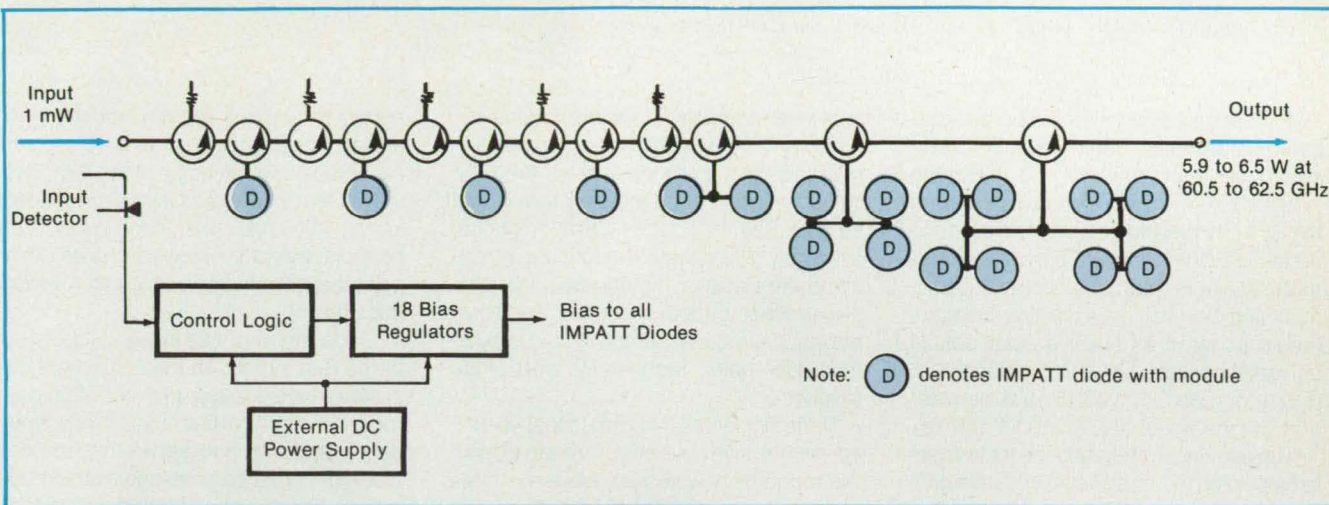

This **Lightweight, Compact 60-GHz Amplifier** is a cascade of IMPATT-diode modules.

Power amplifiers based on impact-avalanche-transit-time (IMPATT) diodes are being developed for operation in communication systems at frequencies near 60 GHz. These solid-state amplifiers are intended to serve as replacements for the bulkier and heavier traveling-wave-tube amplifiers that, until recently, have been the only practical amplifiers available for this frequency range.

The figure shows the configuration of one of the new solid-state amplifiers. The amplifier is built in seven modular stages of one, two, four, and eight IMPATT diodes. Each diode and module can be regarded as a one-port active device that amplifies and reflects the incoming radio-frequency energy. Each of the first three stages contains one IMPATT diode and is optimized for high gain. The last four stages use modules that are optimized for high power at lower gain, and the number of modules per stage is doubled at each step (implying a gain of approximately 3 dB per each of these stages).

Power combining in the multiple diode stages is performed with a passive combiner plate. Power is transferred from stage to stage through sections of waveguide and isolator/circulator assemblies. The dc power is supplied to each IMPATT diode by a dedicated bias-regulating circuit. Each such circuit is turned on automatically by a controlling logic circuit when an input radio-frequency power of 1 mW is detected. At this input power, the amplifier outputs 5.9 to 6.5 W at frequencies from 60.5

to 62.5 GHz, representing dc-to-radio-frequency efficiencies of 3.8 to 4.2 percent.

This work was done by Michael K. Powers, James McClymonds, David Vye,

and Thomas Arthur of **Goddard Space Flight Center**. For further information, Circle 83 on the TSP Request Card. GSC-13465

We can't stress this enough.

Composite tubes and panels from Kaiser supply answers for your weight, strength, and stiffness critical requirements. Our products provide unmatched performance, damage tolerance, and high reliability.

Whether your project requires flight critical structural or control rods up to 500,000 lbs. load or simple utility tubing, we can support your needs. Tubes of elliptical, square, asymmetrical section or round shapes are easily made to your specifications, and you can find us on V-22, F-22, MD-II and A330/340.

Ask us about closed section panels - hat, blade or T-shape stiffened for airframe or satellite use. No matter how tough or simple the application, call Kaiser and let us help shape your thinking.

Call or fax Ron Kloetzli, Marketing Manager, extension 606, Kaiser Electroprecision, Composite Products, 17000 South Red Hill Avenue, Irvine, CA 92714. Tel: (714) 250-1015, Fax: (714) 250-0468.

KAISER ELECTROPRECISION



Balloon-Borne System Would Aim Instrument Toward Sun

The system would provide initial coarse pointing, then maintain fine pointing.

Marshall Space Flight Center, Alabama

A proposed system including a digital control computer, control sensors, and control actuators would aim a telescope or other balloon-borne instrument toward the Sun. This would be a general-purpose system capable of providing three-axis (azimuth, elevation, and roll) or two-axis (azimuth and elevation only) pointing for instruments as large as NASA's solar optical universal polarimeter, which is about 6 ft. (1.8 m) long and 1.5 ft. (0.45 m) in diameter and weighs about 400 lb (about 180 kg).

The pointing system and the instrument to be pointed would be flown aboard a gondola, which would be suspended from a balloon by a cable. The pointing system would include a reaction wheel, which would apply azimuthal control torques to the gondola. A torque motor would apply additional low-frequency azimuthal torques between the gondola and the cable to keep the reaction wheel from saturating.

Three silicon solar cells mounted on the gondola 120° apart in azimuth would guide the azimuthal slew of the gondola in the initial acquisition of the view of the Sun. An elevation-gimbal assembly equipped with a torque motor, tachometer, and angle resolver would be mounted on the gondola. If only the azimuth and elevation were to be controlled, then the instrument

could be mounted on an interface structure on this elevation-gimbal assembly. If roll were also to be controlled, then the instrument and interface structure would be mounted on a cross-elevation-gimbal assembly, which would, in turn, be mounted on the elevation-gimbal assembly. Like the elevation-gimbal assembly, the cross-elevation-gimbal assembly would include a torque motor, tachometer, and angle resolver.

Three single-axis rate gyroscopes mounted on the interface structure along with the instrument would measure the rates of yaw (in azimuth), pitch (in elevation), and roll. An inclinometer on this structure would measure the roll angle. A two-axis Sun sensor mounted on the instrument would measure the deviation, in yaw and pitch, of the attitude of the instrument from the line to the apparent center of the Sun.


The control computer would preferably be readily programmable to adjust control-law parameters to suit whichever instrument is to be aimed. It would provide three modes of operation: (1) the gimbal-command mode, (2) the Sun-acquisition-slew mode, and (3) the Sun-point mode. Initially, the system would operate in the gimbal-command mode, in which the instrument would be brought to zero roll angle (if roll

control were used) and to a predetermined elevation angle approximately equal to the expected elevation angle of the Sun. Then the system would pass into the Sun-acquisition-slew mode (see figure), in which the gondola would be slewed in azimuth to point the instrument approximately toward the Sun.

Once the Sun was in the field of view of the Sun sensor on the instrument, the system would pass into the Sun-point mode. The control law in this mode would be divided into two parts: the first part would generate commanded azimuth-, elevation-, and roll-acceleration commands; these commands would be fed to the second part, which would be a steering law that would generate the torque commands for the control actuators.

This work was done by M. E. Polites of Marshall Space Flight Center. Further information may be found in NASA TP-3013 [N90-21219], "A General-Purpose Balloon-Borne Pointing System for Solar Scientific Instruments."

Copies may be purchased [prepayment required] from the National Technical Information Service, Springfield, Virginia 22161, Telephone No. (703) 487-4650. Rush orders may be placed for an extra fee by calling (800) 336-4700. MFS-28519

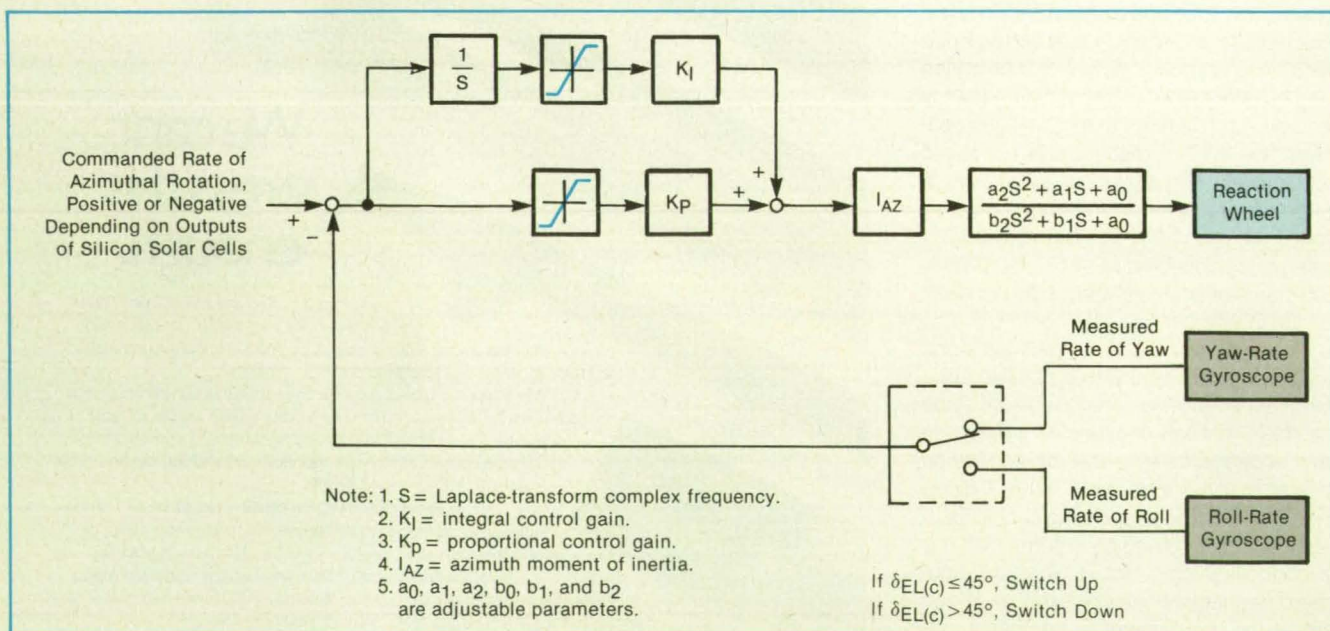

The Sun-Acquisition-Slew Mode of the control system would command the azimuthal slewing of the instrument into initial approximate alignment with the line of sight to the Sun. The coefficients of the second-order transfer function would be chosen to assure stability and provide the required aiming performance for the specific instrument.

CyberResearch, Inc. DATA ACQUISITION AND INSTRUMENTATION 1-800-486-8800 PRODUCTS FOR SCIENTISTS & ENGINEERS

INSTRUMENTATION

New GPIB Controllers Support IEEE-488.2 Standard

The new IEEE-488.2 standard has made it easier than ever to program & control GPIB devices. Manufactured by **National Instruments**, these boards allow you to control and gather data from up to 15 devices with IEEE-488 interfaces. Our **AT GPIB** and **Micro-Channel** controllers support data transfers at up to 1 Million samples/second. (No re-writes! Older software fully supported!)




- #INST 1000A Standard GPIB Controller with IEEE 488.2 Support\$395
- #INST 1004 AT-Bus, 1 MHz Turbo GPIB Controller\$495
- #INST 1011 Micro-Channel, 1 MHz Turbo GPIB Controller\$495
- #IEEE 30-2 2-Meter GPIB Cable (Many styles & lengths avail. - Call for info!)\$59

For More Information Circle No. 368

DATA ACQUISITION

EASIEST LX Software from Keithley/Metrabyte

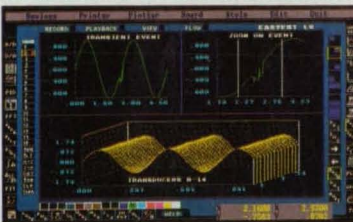

Easiest LX gives you an integrated set of tools for easy and effective implementation of a data acquisition and analysis system on any IBM-compatible PC. Each tool is represented by an icon, and the all-in-one screen puts everything in view for instant access. **No other package lets you do so much, so quickly, so easily.**

- Acquisition & analysis combined
- DMA acquisition at full speed of H/W
- All tools always displayed on screen
- Control A/D, D/A, Digital I/O, etc.
- Analyze time & frequency domains
- Call for free Demo Disk.

#ASY 200 EASIEST LX Software w/ 1 Free DAS Board Driver\$995*

*New, lower price NOW IN EFFECT. Save even more with CyberResearch!

For More Information Circle No. 360

Berry Fast: 200 KHz Data Acquisition for just \$895

The new **WorkMate** data acquisition board from **Strawberry Tree** combines ease-of-use with blinding speed. Entirely software configured and controlled, the new **WMPC 200** makes data acquisition on a PC simple, without sacrificing performance. Each **WorkMate** board comes with a free copy of **QuickLogPC**, an icon-driven data acquisition program.



For the ultimate in easy-to-use A/D software, **WorkBenchPC** combines an icon-driven interface with powerful acquisition & analysis capabilities.

- #WMPC 200 WorkMate 200KHz, 12-Bit Data Acquisition Board\$895
- #FLPC 1000 16-Channel, 1MHz, 12-Bit Data Acquisition Board\$1995
- #STS 050 WorkBenchPC Software\$995

For More Information Circle No. 361


FREE PC Systems Handbook for Scientists & Engineers

This Combination Tutorial/Catalog Includes Many Examples of PC-based Systems

The **CyberResearch PC Systems Handbook for Scientists & Engineers** describes over 1400 unique and hard to find items for PC-based engineering. Packed with useful technical information and easy-to-read diagrams, this invaluable reference should be part of every engineer's library.

Fax, Call, or Write for a complimentary copy.

For More Information Circle No. 366



MOTION CONTROL

Motion Control Systems make Motor Control Easy

PC-based motion control may seem like science fiction to many people. Here at CyberResearch, it's one of our specialties. It can also cost a lot less than you think. Shown here is our **CMCS 222A** complete motor control system, which includes:

- **Technology 80** 2-Axis Intelligent Stepping Motor Controller Board with software
- **Oriental Motor** High-Torque Stepping Motors, Size 23, 1.8°/Step (Quantity 2)
- **IMS** 40V, 3.5A Bipolar Chopper Drivers
- **Electrostatics** Regulated DC Power Supply
- Screw Terminal Panel with Cabling

Designed for a maximum holding torque of 125 ounce-inches, this system is perfect for many applications. It is rated for speeds of up to 7,000 steps-per-second (at 20% of holding torque.)

#CMCS 222A High Torque, 2-axis Size 23 Stepping Motor Control System...\$1595

For More Information Circle No. 370



RACK-MOUNT COMPUTERS

Elma Rack-Mount Keyboards

If you use a standard keyboard with your rack-mount system, you know what a nuisance and a hazard it can be. These industrial keyboards are designed to fit easily into any EIA 19" rack. Rugged and reliable, these keyboards are made in the U.S.A. by a Swiss electronics company & demonstrate classic Swiss craftsmanship.



- 101-key layout & full-travel construction with tactile feel for touch-typing
- #OIX 3010 drawer-mounted / #OIX 6010 (shown) slides out with locking door
- Occupies only 1 rack space (1.75" high)

#OIX 3010 Low-cost, Drawer-Mounted Rack-Mount Keyboard\$295

#OIX 6010 Slide-out, Rack-Mount Keyboard w/locking drawer\$395

For More Information Circle No. 373

Rugged, Industrial Rack-Mount PC's



80486 at New Low Price

These are the toughest PC's available **anywhere**. Each unit includes such features as: A heavy steel chassis to eliminate EMI/RFI problems, a 12-slot passive backplane, a single-board CPU which protects system components from shock and vibration, and a protective door to cover the disk drive opening. Additional protective features include a shock-isolated mounting panel for a 3.5" hard drive, an industrial-quality power supply to provide line filtering with surge suppression, and dual fans to pull air through a modacrylic filter.

#IPC 386-25S Industrial Rack-Mount 25MHz 80386sx Computer\$2995


#IPC 386-33 Industrial Rack-Mount 33MHz 80386 Computer\$3695

#IPC 486-33 Industrial Rack-Mount 33MHz 80486 Computer\$4495

For More Information Circle No. 366

The CyberResearch Advantage:

- ✓ FREE Application Engineering
- ✓ Everyday Low Prices
- ✓ Broadest Product Selection
- ✓ 100% Satisfaction Guarantee



Mailing Address:
P. O. Box 9565
New Haven, CT 06535

Worldwide
(203) 483-8815
Fax: (203) 483-9024



(800) 486-8800

GPS Measurement of Attitude

Orientations of ships, aircraft, and other objects can be determined with unusual accuracy.


NASA's Jet Propulsion Laboratory, Pasadena, California

Signals transmitted by satellites of the Global Positioning System (GPS) can be used to measure the orientation of a baseline on a ship, aircraft, or other vehicle or platform with unusual accuracy. Combined with conventional GPS position and velocity data, the GPS orientation data allow more precise navigation and mapping and can also enhance calculations related to the performance and control of the vehicle or platform.

Though the details of implementation are complicated, the underlying concept is simple. Two GPS antennas, each connected to its own receiver, are placed at well separated points on the platform (see figure). The two GPS receivers then measure the positions of the ends of the baseline as functions of time. Conventional processing of the outputs of these receivers yields the platform's position and velocity. (Of course, one antenna and receiver would suffice for this purpose.) In addition, the output processor computes the vector difference between the two GPS positions and uses it to determine the orientation of the baseline.

Reliable implementation of the technique depends on the use of Rogue GPS receivers, which provide unusually precise GPS pseudorange. A straightforward least-squares algorithm calculates position and velocity, using as inputs the delay and the rate of change of delay for each satellite being tracked. The delay data are ionosphere-calibrated P-code pseudoranges, and the rates of change of delay are computed as differences of the ionosphere-calibrated carrier phase. As output, the algorithm gives the three-dimensional position and velocity of the receiver, along with the offset and rate of the receiver clock. Data from at least four satellites are needed to define a solution.

The orientation of the baseline is also

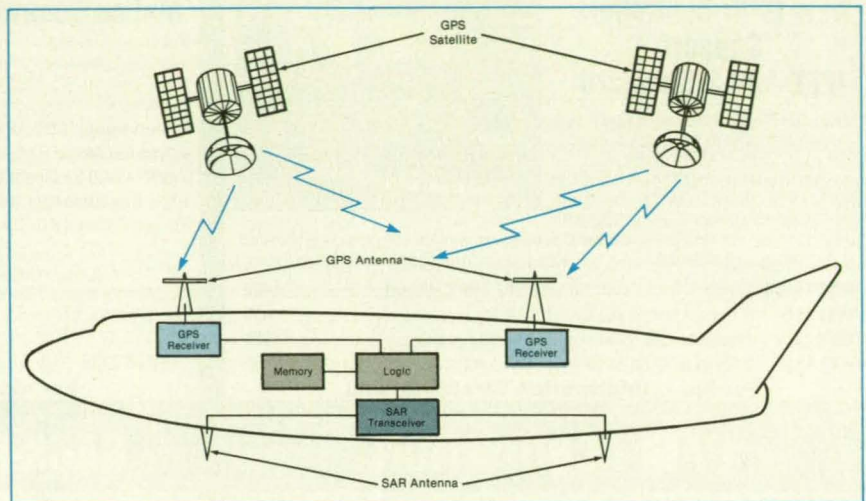

Two GPS Receivers yield differential measurements of position from which the orientation of the baseline between the antennas can be calculated.

calculated by a least-squares algorithm. For this calculation, the primary inputs are double-differenced carrier phases, and the outputs are the three vector components of the baseline. In the absence of other information, three double-differenced phases (implying four satellites) are required to specify a solution.

The technique was tested aboard an aircraft carrying a synthetic-aperture radar (SAR), with a view toward using the GPS velocity and orientation data to correct for the effect of the attitude of the aircraft on SAR measurements of ocean-surface currents. Such a calibration is necessary when there is no land area in the SAR image to use as a zero-velocity reference. In this test, the technique was used to determine the orientation of a baseline between two antennas near the top of the fuselage, one just behind the cockpit and another about 23 m farther back. The two Rogue GPS receivers shared a rubidium frequency standard. They were configured to track

four satellites simultaneously, computing the time-tagged GPS P1 and P2 pseudorange and L1 and L2 carrier phase along with signal-to-noise ratios. Once per second, these values were stored for later analysis. The uncertainties in the results were approximately 15 m in position, 0.015 m/s in velocity, 0.012° in azimuth, and 0.038° in pitch.

This work was done by S. J. DiNardo, E. L. Hushbeck, T. K. Meehan, T. N. Munson, G. H. Purcell, J. M. Srinivasan, L. E. Young, and T. P. Yunck of Caltech for NASA's Jet Propulsion Laboratory. For further information, Circle 10 on the TSP Request Card.

This invention is owned by NASA, and a patent application has been filed. Inquiries concerning nonexclusive or exclusive license for its commercial development should be addressed to the Patent Counsel, NASA Resident Office-JPL [see page 20]. Refer to NPO-17937.

Transmission of Power Via Combined Laser Beams

The combined beams would be suitable for transmission of power in outer space.

Langley Research Center, Hampton, Virginia


Lasers of high average power are now being considered for use as efficient means of transferring power from the Earth to satellites and between satellites. Of the various types of laser configurations, the laser-diode array (LDA) appears to be the most efficient in terms of mass and size. A study has been conducted on the far-field beam pattern and the power-collection efficiency of a multistage LDA amplifier consisting

of about 200,000 5-W LDA amplifiers with random distributions of phase and orientation errors and random failures of diodes. Preliminary results indicate that such a system could be used to transmit power on laser beams in outer space.

To form a large-scale-array amplifier (LSAA), the element LDA's must generate well-defined diffraction-limited beams. Coherent matching of phases among the ele-

ment LDA's is also critically important, enabling an LSAA system to generate a good beam pattern in the far field over thousands of kilometers. By passing a beam of high spectral and spatial quality from a master laser through a number of LDA amplifiers simultaneously, one can realize coherence among the amplified output beams.

The power in the far field of a beam dif-

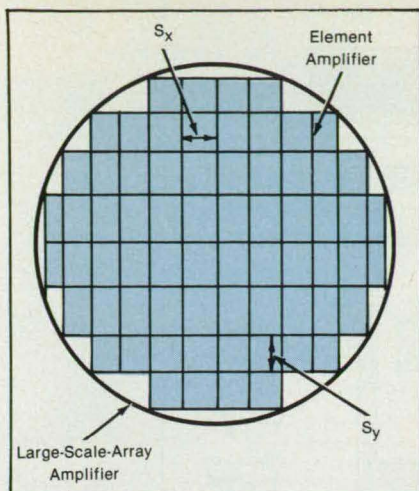

One Megawatt of Power would be generated by use of 200,000 5-W LDA amplifiers.

fracted by a circular aperture is larger than that of the same beam diffracted by a square aperture of the same width. Therefore, to provide a conservative analysis, the overall shape of the LSAA is assumed to be circular. The elements of the LSAA are LDA amplifiers stacked inside the LSAA frame as shown in the figure, where horizontal and vertical widths after collimation are S_x and S_y , respectively. The amplifiers are assumed to generate diffraction-limited coherent collimated beams. Therefore, the full width at half maximum (FWHM) diffraction angle of the beam from the element LDA is typically about 0.16 mrad for a wavelength of $0.8 \mu\text{m}$ and $S_x \approx S_y \approx 1 \text{ cm}$.

In the calculation of the far-field beam patterns and the power-collection efficiencies of the LSAA, the probable random phase errors and random failures of the individual amplifiers were taken into account. The power-collection efficiency is dependent on the size of the receiving aperture and on the pointing (that is, aiming) accuracy over a long distance. The

FOR A TOUGH CASE GET HARDIGG™

Rotational molding.
Corners and edges are 10% to 20% thicker than flat walls, providing strength where you need it most. One piece stress-free molded lid and base.

Low-profile cam-action wing-turn catches attached to molded-in metal inserts.

High strength, lightweight hardware.
Replacement will not penetrate container shell.

Molded-in tongue-in-groove gasketed parting line.
Resilient polyethylene shell returns to original configuration after impact.

Recessed hardware.
Fully protected from damage.

Positive anti-shear locks.
Prevents lid separation from base on impact. Minimizes stress on hardware.

Lightweight, MIL-SPEC off-the-shelf protection against shock, vibration, moisture, temperature extremes.

HARDIGG™ CASES
A Division of Hardigg Industries, Inc.

393 No. Main Street, P.O. Box 201, South Deerfield, MA 01373 (413) 665-2163 FAX: (413) 665-8061

For More Information Circle No. 491

best pointing accuracy to date has been shown to be $0.1 \mu\text{rad}$, or about 50 cm at a transmission range of 5,000 km.

Preliminary calculations show that the LSAA could be used for the transmission of power in outer space with power-collection efficiency of approximately 80 percent into a receiver of moderate size (about 3 m in diameter) at a distance of 5,000 km. This approach could also offer the possi-

bility of transmission of data at high rates by line-of-sight means rather than by fiber optics, while still offering the efficiency, compactness, and reliability of semiconductor lasers.

This work was done by Jin H. Kwon of Miami University and Ja H. Lee of Langley Research Center. For further information, Circle 145 on the TSP Request Card. LAR-14389

Computer Jet-Engine-Monitoring System

Artificial intelligence distills and presents data on operation of engines.

Ames Research Center, Moffett Field, California

A computer-based monitoring system is intended to distill and display data on the conditions of operation of the two turbofan engines of an F-18. The system, called the "Intelligent Computer Assistant for Engine Monitoring" (ICAEM) is in a preliminary state of development. The goals of the development project are to enhance safety of flight and to relieve propulsion engineers of the time-consuming but necessary task of monitoring propulsion systems in flight.


The ICAEM is designed to operate as an "expert aid" to an engineer, even an engineer who has little or no experience in monitoring propulsion systems. As telem-

etry data are received from the airplane, the ICAEM processes the mass of data into summary information on the status of the propulsion system and presents the information on a single video display at a computer workstation (see figure). The engineer can choose among a number of color graphical and textual displays to monitor the statuses of the left and right engines, instantaneous individual parameters (e.g., oil pressures or speeds of rotation), and/or histories of parameters (e.g., strip-chart displays). When a particular combination of parameters indicates an anomaly (e.g., stall), the ICAEM indicates the anomaly along with the recommend-

ed procedure (if any) to recover (e.g., to restart the engine).

The major part of the overall function of the ICAEM is effected by a computer program that acts as an interface between the incoming telemetry data and an expert-system computer program that codifies some of the expertise of propulsion-system engineers. Once given data, the expert system decides whether there exists an anomaly or other condition that the engineer needs to know. If so, that information is sent to another program that displays the necessary information to the engineer.

When telemetry data are received, the

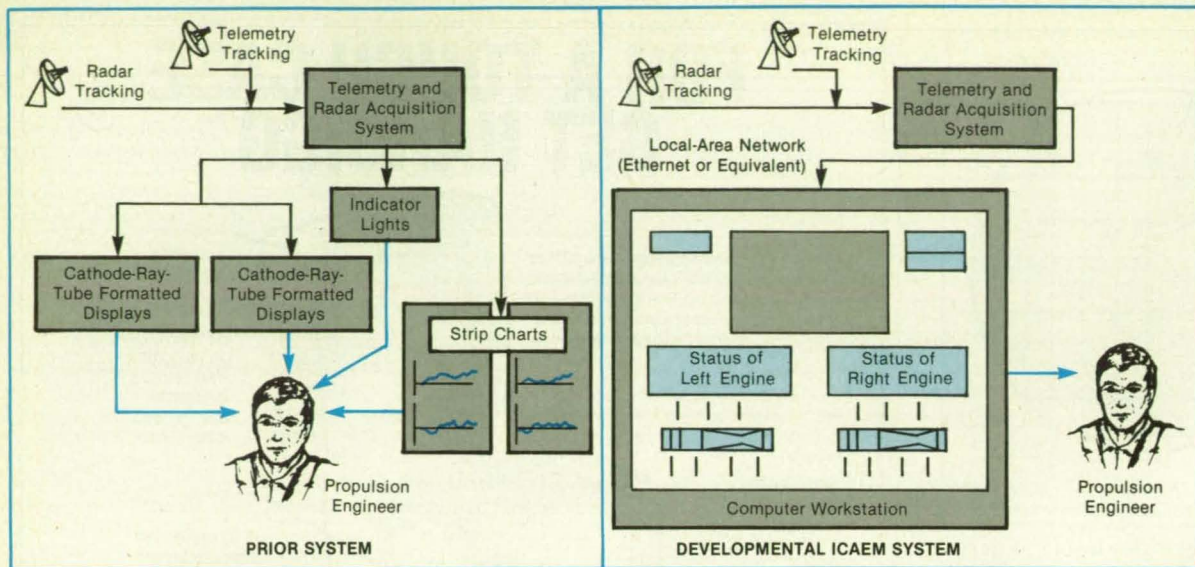

The **Developmental ICAEM System** reduces the burden on the propulsion engineer by providing a single display of summary information on the statuses of the engines and by alerting the engineer to anomalous conditions. In contrast, effective use of the prior engine-monitoring system requires continuous attention to multiple displays.

main program asserts a fact into a fact base in the expert-system program. Once enough facts are generated to match the conditions of a rule, the rule is "fired." The system must be able to identify a single-parameter anomaly (e.g., oil pressure too high) or an anomaly of the system that manifests itself via multiple parameters. As an example of the second type of anomaly, suppose that an attempt is being

made to start the engine and the speed of rotation remains less than a specified allowable minimum during a specified time. In that case, the ICAEM processes the speed and time parameters into an indication of a "potential hung start."

This work was done by James D. Disbrow of PRC Systems, Inc., and Eugene L. Duke and Ronald J. Ray of **Ames Research Center**. Further information may

be found in NASA TM-101702 [N90-22322], "Preliminary Development of an Intelligent Computer Assistant for Engine Monitoring."

Copies may be purchased [prepayment required] from the National Technical Information Service, Springfield, Virginia 22161, Telephone No. (703) 487-4650. Rush orders may be placed for an extra fee by calling (800) 336-4700. ARC-12776

NAG[®]

Numerical Algorithms Group


If your applications require mathematical programming, you can learn what users the world over have discovered. The NAG Numerical Libraries or other software products allow you to spend your time and talents on genuine problem solving, not software development. Your code will be more portable, your results will be more reliable - all in considerably less time. Take advantage of NAG's expertise in any of these fine products:

NAG Fortran Library

A flexible tool for building custom mathematical applications, includes more than 900 user callable subroutines frequently required for scientific or engineering projects.

Resolution

A powerful Mac-based mathematical tool box with a graphical user interface designed to mimic a scientific calculator. Provides point and click analysis for 3.D surfaces, ODE's, Fourier transforms, matrix calculations and more.



NAG C Library

NAG's expertise in mathematics is now available in a subroutine library developed entirely in C. Using just one of the many routines can easily offset the cost of writing your own algorithms.

NAGware F90 Compiler


A true multipass Fortran 90 compiler. Compiles Fortran 90 code to C. Allows the Fortran user to take immediate advantage of the full features of Fortran 90. Available for a number of UNIX machines.

Symbolic Algebra Software

NAG markets several symbolic algebra software products. If your work requires powerful algebraic manipulation turn to NAG for features and facilities not available in other packages.

NAG VecPar_77

An interactive CASE tool for vectorizing and parallelizing Fortran programs. Attain performance improvements beyond what optimizing compilers may provide. Ideal for "rejuvenating" older applications.




For complete details, write NAG or call 708/971-2337.


THE SCIENTIFIC AND NUMERICAL SOFTWARE SPECIALISTS

Numerical Algorithms Group Inc., 1400 Opus Place, Suite 200, Downers Grove, IL 60515-5702 USA Tel: 708/971-2337

CHOOSE INCO COATED PRODUCTS FOR HIGH PURITY AND PREDICTABLE PROPERTIES.

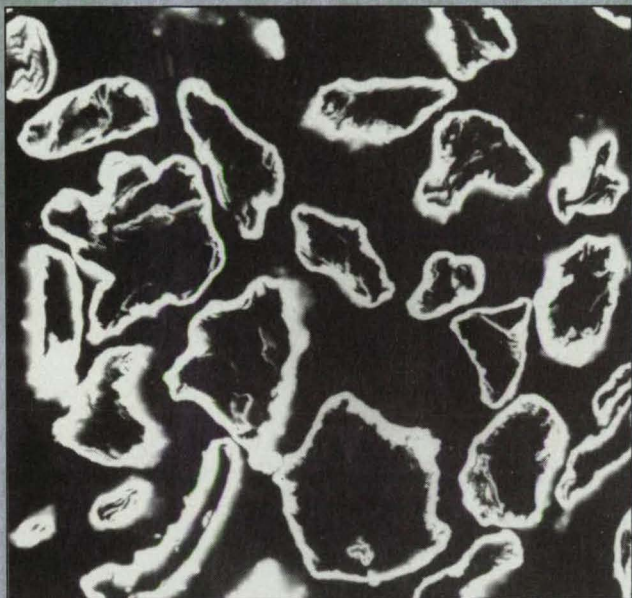

Nickel Coated Graphite Powders

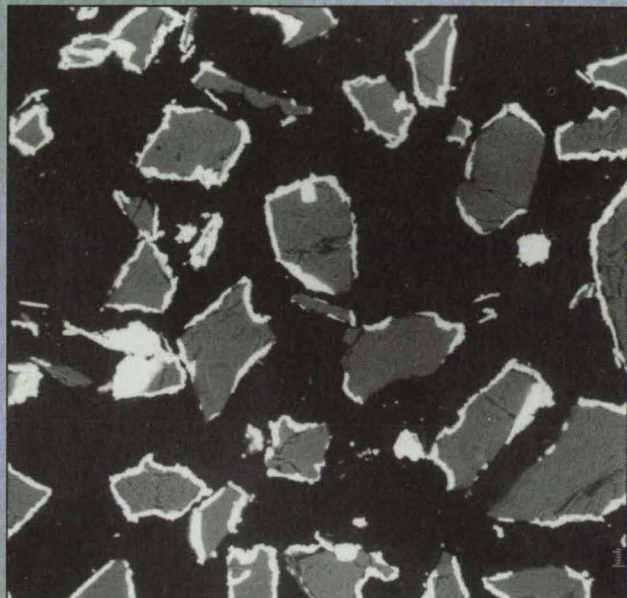

Nickel Coated Alumina

INCO Specialty Powder Products' development of the use of carbonyl gas coating allows deposition of nickel with very high purity and predictable properties and is uniquely suited for a variety of coated products and applications.

INCO SPP COATED PRODUCTS

Nickel combines a unique mixture of special physical, conducting and magnetic properties. The ability to deposit nickel on various substrates greatly extends the potential for the use of these properties. Coatings are being made, for example, on silica, graphite, alumina, tungsten carbide, clays and ceramics. INCO SPP has the capability to coat special substrates on a custom basis for individual users.

APPLICATIONS

New uses for INCO SPP Coated Products include conducting film technology, electronics packaging, EMI shielding, electronic detection devices, controlled heating systems, hard metals and powder metallurgy parts.

RESEARCH

INCO SPP research activities for this line of products include nickel carbonyl coated powders and other substrates. Applications include advanced products for EMI shielding, ESD, arc welding, powder metallurgy additives, and in battery technologies.

One highly interesting area of research is in the area of electronic detection. Coated products are being combined with paint for highway divider strips and as ink in bar codes for vehicle identification. This could provide an accurate measure of automobile speed on those highways. Another futuristic consideration is "computer trips for cars" using those strips and bar codes to program automotive travel and identification.

INCO SPP

INCO Specialty Powder Products is your unique resource for coated products. Our customer focused worldwide marketing service group is ready to help you with your current and future needs for coated products.

For more information write INCO Specialty Powder Products, Dept. 2-90, Park 80 West-Plaza Two, Saddle Brook, NJ 07662

INCO SPP

Park 80 West-Plaza Two, Saddle Brook, NJ 07662
Shin-Muromachi Building, 4-3 Nihonbashi-Muromachi 2-Chome,
Chuo-ku, Tokyo 103 Japan
1-3 Grosvenor Place, London SW1X7EA England
15/FI Wilson House, 19-27 Wyndham Street Central, Hong Kong

For More Information Circle No. 852

Using Spectral Edge To Measure Doppler Shift

Frequency is inferred from relative amplitudes of the signal with and without filtering.

Goddard Space Flight Center, Greenbelt, Maryland

Pulsed-laser ranging systems of a new type implement a spectral-edge technique to make high-resolution measurements of the Doppler frequency shift in signals backscattered from targets. These systems are intended for use in measuring the velocities of both moving solid targets and diffuse moving targets like wind (via backscatter from aerosol particles and/or molecules), clouds, aerosols, or rain. Potential practical applications include measurements of wind shear from observation points at airports and aboard aircraft.

In designing a system of this type, one chooses a pulsed laser that emits at an ultraviolet, visible, or infrared wavelength suitable for generation of the desired hard-target or atmospheric backscatter. In conjunction with the laser, one selects or designs an optical filter (the "edge" filter) that has a sharp spectral transmission function such that the middle frequency of the laser emission lies on a steep portion of the slope (the "edge") on one side of the peak (see Figure 1).

Figure 2 helps to show how the lidar system uses the spectral properties of the laser and filter to measure the Doppler shift of the backscatter. A small fraction of the energy of each outgoing laser pulse is picked off by beam splitter 1, attenuated to about the level of the backscatter, and passed through an optical train to be sampled by a photodetector (called the "energy-monitor" photodetector). Part of the attenuated, picked-off fraction of the outgoing beam is also passed through the edge filter to a similar photodetector called the "edge-filter" photodetector. The backscatter signal is received by a telescope and sampled in the same manner as that of the picked-off, attenuated outgoing pulse. The outgoing-pulse and backscatter measurements are range-gated and digitized. The digitized values are then converted into normalized signal levels — ratios between the edge-filtered and energy monitor samples of the outgoing-pulse and backscatter signals. By use of the difference between the ratio of the backscatter samples and the ratio of the outgoing-pulse samples, the processor computes the difference between the middle frequencies of the backscattered and outgoing pulses — that is, the Doppler shift.

A typical system of this type offers several advantages in comparison with prior Doppler lidar systems. It is not necessary to use diffraction-limited optics. It is not necessary to use a narrow-band laser; one

can even use a laser that emits light in a spectral band 100 or more times as wide as the desired accuracy of the frequency measurement. The use of a differential-frequency-measurement technique with normalization anew on each pulse renders the measurement insensitive to jitter and drift in the laser frequency and in the spectral characteristics of the laser, provided that the laser width is narrow relative to the width of the edge filter and that the laser remains on the edge; that is, at or near the desired value about halfway down the peak of the filter spectrum. The signal normalization renders the measurement insensitive to variations in the amplitude of the outgoing and backscattered signals.

Furthermore, the spectral-edge technique enables the system to measure a small average Doppler shift caused by wind, even in the presence of much greater Doppler broadening caused by thermal motions of molecules.

This work was done by Lawrence Korb of Goddard Space Flight Center. For further information, Circle 23 on the TSP Request Card.

This invention is owned by NASA, and a patent application has been filed. Inquiries concerning nonexclusive or exclusive license for its commercial development should be addressed to the Patent Counsel, Goddard Space Flight Center [see page 20]. Refer to GSC-13343.


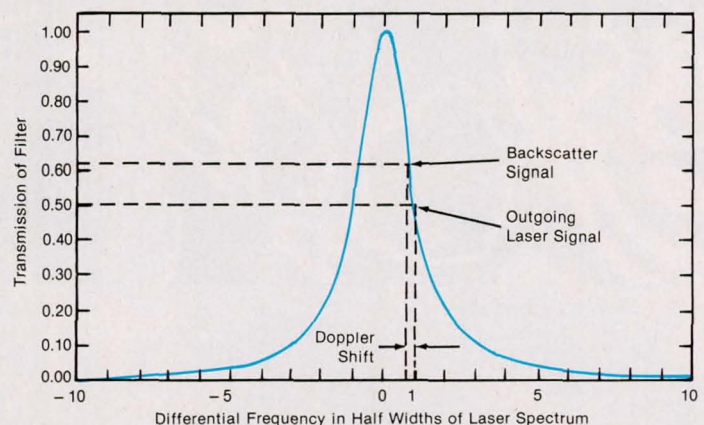


Figure 1. Normalized Levels of Filtered Optical Signals at two different frequencies depend on the transmission spectrum of the filter. The spectrum is chosen so that the frequencies of interest lie about halfway down from the peak on one side. The difference between the frequencies is computed from the slope of the spectrum and the difference between the levels.

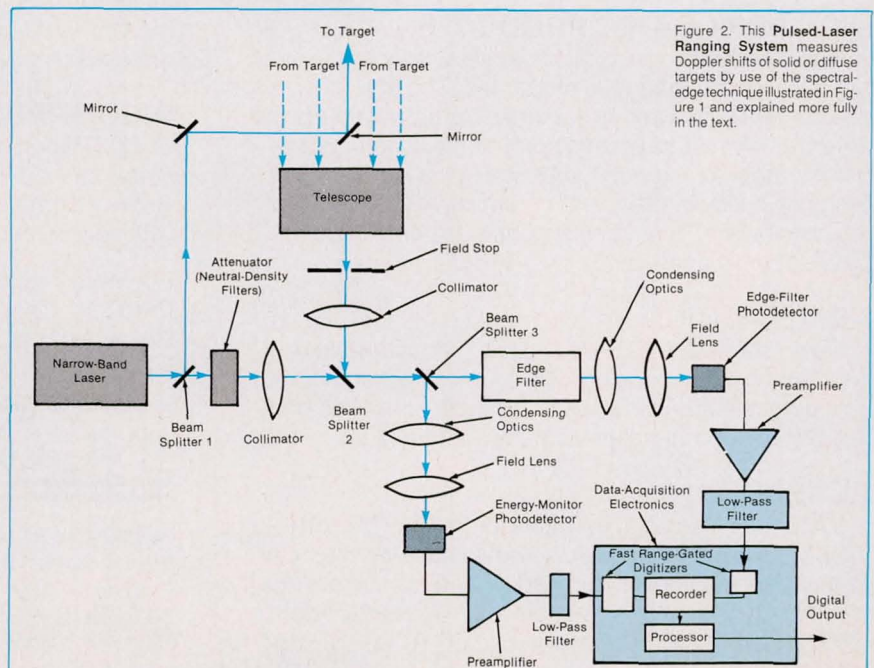

Books and Reports

These reports, studies, handbooks are available from NASA as Technical Support Packages (TSP's) when a Request Card number is cited; otherwise they are available from the National Technical Information Service.

Effects of Phase Jitter on Lock Detection in QPSK

Analyses are performed for three QPSK tracking loops.

A report presents a study of the performances of digital carrier-signal-tracking loops used in the reception of radio signals that contain quadrature-phase-shift-keyed (QPSK) modulation representing binary non-return-to-zero data. One of the important monitoring functions of a QPSK receiver — one that is necessary for automated operation — is the detection of lock on the carrier signal ("lock detection," for short). This study differs from prior studies (which involved the assumption of perfect carrier tracking) in that it includes the degrading effects of jitter in the phase of the carrier signal upon lock detection.

In most applications, it is valid to assume perfect carrier tracking as long as the loop signal-to-noise ratio (SNR) is sufficiently high or the period of estimation is sufficiently long. Under either condition, the degrading effect of phase jitter is not an issue; but where the loop SNR is low (because the received signal is weak) and the period of estimation has to be limited (to satisfy requirements upon the monitoring system), the degradation caused by phase jitter becomes significant and must be included in the calculations to predict performance accurately.

The report presents mathematical models of the received signal and of the noise, which is assumed to be white Gaussian. It describes the lock-detector algorithm and presents equations that characterize the lock-detection performance. Equations for the probabilities of lock detection and false indication of lock are derived. The degrading effect of phase jitter is then expressed as the ratio between the detector SNR in the presence of phase jitter and the detector SNR in the absence of phase jitter (or equivalently, assuming infinite SNR in the carrier-tracking loop).

The equations thus derived are applied in analyses of three QPSK carrier-tracking loops: the Costas crossover loop, the maximum a posteriori estimation loop, and the generalized Costas loop. The results of computer simulations are presented and found to agree substantially with the equations. Both the equations and the simulations are used to show that phase jitter can reduce the detector SNR by as much as 2 dB, especially when the loop SNR is low and the period of estimation is short.

HARDTUF™

**A HARD ALUMINUM OXIDE
COATING WITH A UNIQUE METHOD
OF IMPREGNATION OF
TILON PTFE POLYMER.**

Improves hardness
to a
65 Rockwell.

HARDTUF provides a dry lubricating surface composed of a PTFE polymer called Tilon. Tilon is impregnated into the surface asperities, thus reducing surface tension and greatly increasing lubricity and corrosion resistance. Wear, abrasion and erosion resistance is superior to other Mil-spec type hard anodizing processes.

TIODIZE

15701 Industry Lane, Huntington Beach, CA 92649
(213) 594-0971 • (714) 898-4377

For More Information Circle No. 422

Introducing "OTTO". The First True Autosync Scan Converter.

When you need to convert your high-resolution images to broadcast quality video, you need it done right the first time, without adjustments and configuration "guesswork".

Meet "OTTO", the first true Autosync Scan Converter from the leaders in scan conversion technology.



Folsom
RESEARCH



526 East Bidwell Street, Folsom, CA 95630
Tel: 916.983.1500 ■ Fax: 916.983.7236

For More Information Circle No. 540

The Link Between Computer Graphics and Video



RGB/Videolink® 1600U

The only scan converter to offer
both video taping and high quality
video projection

- Adjustment free auto-locking to all workstations, PCs and Mac IIs
- Interlaced and non-interlaced inputs
- Pan, scroll and zoom
- Flicker-free output
- Video overlay capability
- Full 24 bit color
- Genlock
- RS-232 control
- Broadcast quality NTSC/PAL composite video S-Video, RGB RS-170/EBU, Y, R-Y, B-Y
- RGB 31.5 kHz for video projection
- Other models from \$10,995



SPECTRUM

950 Marina Village Parkway Alameda, CA 94501
Tel: (510) 814-7000 Fax: (510) 814-7026

This work was done by Alexander Mileant and Sami M. Hinedi of Caltech for NASA's Jet Propulsion Laboratory. To obtain a copy of the report, "On the Effects of Phase Jitter in QPSK Lock Detection," Circle 87 on the TSP Request Card. NPO-18208

Detection and Avoidance of Obstacles by Helicopters

Concepts of sensing and control are discussed.

A report discusses the general problems relevant to the design of control subsystems that would enable helicopters on nap-of-the-Earth flight paths to detect and avoid obstacles automatically. For the purpose of this study, it is assumed that a guidance or navigation subsystem has provided a nominal trajectory for a short distance ahead. Using information on obstacles provided in real time by the obstacle-detection subsystem, the obstacle-avoidance subsystem would adjust the flightpath about the nominal trajectory to obtain a safe trajectory.

The main text begins with an introduction that describes the helicopter obstacle-avoidance problem, indicating the similarities and differences between this problem and the obstacle-avoidance problem of industrial mobile robots. One notable similarity is that the domain of action is predominantly two-dimensional in the sense that nap-of-the-Earth flight is predominantly ground-hugging with lateral maneuvers, as are the movements of a mobile robot around the floor of a factory or laboratory. A previous paper on the helicopter obstacle-avoidance problem restricted the concept to the two-dimensional framework, and one of the considerations in the present study is how to extend the concept to the full three dimensions.

The problem is discussed under two different assumed circumstances. The first circumstance is that a full range map is available, regardless of whether the map data are collected from a passive or an active sensor. Two different approaches are proposed to extend the previous two-dimensional obstacle-avoidance concept to three dimensions, exploiting the predominantly lateral-maneuvering characteristics of nap-of-the-Earth flight. The first approach involves a direct search of the three-dimensional range-map data for indications of openings between obstacles. The second approach involves compression of the three-dimensional data into a two-dimensional map for a two-dimensional path search. Both approaches remain to be tested in realistic simulations.

The second circumstance is that a passive sensor, which is the preferred primary sensor, provides only a sparse range map. In this case, an integrated approach is proposed to augment the passive sensor with an active sensor, which would be driven by the obstacle-avoidance subsystem to probe the environment selectively for supplemental range data. This approach raises the issue of the fusion of data, and two data-base formats are proposed to provide the uniformity required for this purpose. Both formats involve quantization of the horizontal components of range. One also involves quantization of the vertical component, enabling the representation of overhanging objects, at the cost of additional memory and, potentially, additional computation.

This work was done by Victor H. L. Cheng and Banavar Sridhar of Ames Research Center. To obtain a copy of the report, "Integration of Active and Passive Sensors for Obstacle Avoidance," Circle 37 on the TSP Request Card. ARC-12825



Measuring Hydrogen Plumes With Raman Lidar


Concentrations below the lower limit for flammability can be measured.

John F. Kennedy Space Center, Florida

A prototype Raman lidar system measures the concentration of hydrogen gas in the atmosphere as a function of position, with a range resolution of 3 ft (about 0.9 m) over a range of 3,000 ft (about 0.9 km). It is sensitive to concentrations smaller than 0.5 percent, which is 10 times below the minimum flammable concentration. The system is being developed for use as a safety monitor and to study the dispersion of hydrogen gas that leaks into the atmosphere.

Prior Raman lidar systems have been developed to detect methane and light hydrocarbons in refineries. The basic principle of operation is straightforward (see figure): A pulsed ultraviolet laser beam is directed through beam-shaping and beam-steering optics along the desired line of sight into the atmosphere. The beam excites Raman emissions from the molecules to be detected (in this case, hydrogen and nitrogen). The backscattered light is collected by the telescope, band-pass-filtered at the appropriate hydrogen and nitrogen Raman wavelengths, and sent to photodetectors.

The outputs of the hydrogen-wavelength and nitrogen-wavelength channels are digitized and range-gated according to the round-trip pulse-travel times. For each

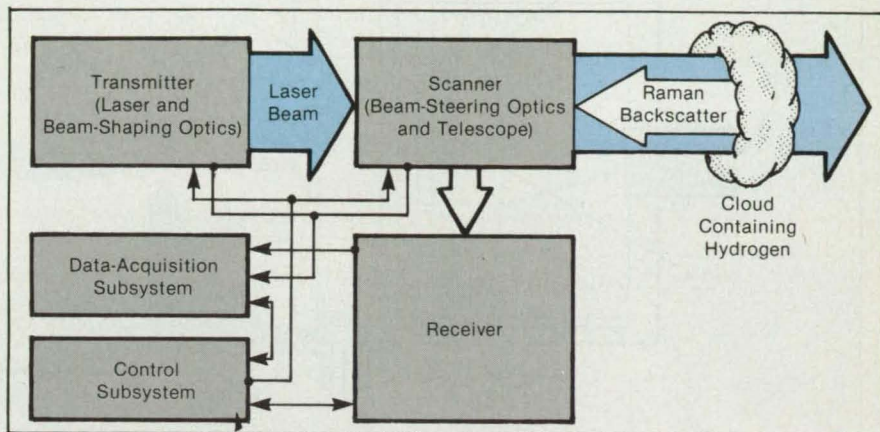

The **Scanning Lidar System** measures the space-resolved concentration of hydrogen in the atmosphere via Raman backscatter from a pulsed laser beam.

range, the relative concentration of hydrogen is computed from the ratio between the hydrogen- and nitrogen-backscatter signals. The concentration and range data can be correlated with scan-angle data to obtain a color graphic display of concentration as a function of position in three dimensions.

The principal sources of error in the prototype system are liquid water (rain or spray) and sunlight. Another Raman lidar chan-

nel could be added to measure the water content and use it to correct the hydrogen content. The effect of sunlight can be totally eliminated through the use of a special dielectric coating on the telescope mirrors, which serve as sunfilters.

This work was done by Bernard Caputo of Computer Genetics Corp. for Kennedy Space Center. For further information, Circle 63 on the TSP Request Card. KSC-11459

Improved Raman-Emission Detector

Sensitivity is increased by several novel design features.

John F. Kennedy Space Center, Florida


The figure illustrates an improved apparatus that excites and detects Raman emissions (optical emissions from rotationally and vibrationally excited molecules) in a sample gas mixture. The emissions at the known Raman wavelength of a given molecular species are used to measure the concentration of that species in the mixture. This apparatus features several changes in design that result in sensitivity greater than that of a prior Raman-emission detector: most notably, increasing the collection of Raman emissions by use of a paraboloidal reflector and collecting lens coaxial with the illuminating beam instead of a spherical reflector and condensing lens on an optical axis perpendicular to the illuminating beam.

An argon-ion laser beam is used to excite the molecules of the sample gas. The

beam enters the apparatus through a window and is directed to bounce back and forth between two concave mirrors. These mirrors are configured so that the multiply reflected beam converges to a waist at and near the focal point of the paraboloidal reflector. Thus, the Raman emission comes predominantly from the narrow waist region and is, therefore, collimated by the paraboloidal reflector. The collimated light is passed through a low-pass filter, which reduces noise by suppressing both scattered light at the original laser frequency and undesired ultraviolet fluorescence excited by the laser beam. The collimated light is then sent through a band-pass filter to select only light of the desired Raman wavelength. The filtered light is then focused by the collecting lens onto a photomultiplier tube.

The volume partially enclosed by the paraboloidal reflector and the low-pass filter constitutes the sample chamber. The sample gas flows through this chamber from an inlet to an outlet and then to a suction pump. This flow continually purges the chamber. The gas mixture is made to flow through a venturi tube at the outlet to generate additional suction, which is used to reduce the pressure in the cavity shown in the figure to the right of the sample chamber. A set of vanes at the inlet diverts the flow in such a way as to reduce the time needed to flush out any previous sample gas and stabilize the composition of the present sample gas in the chamber.

This work was done by Gary N. McKinney of Lockheed Space Operations Co. for Kennedy Space Center. For further informa-

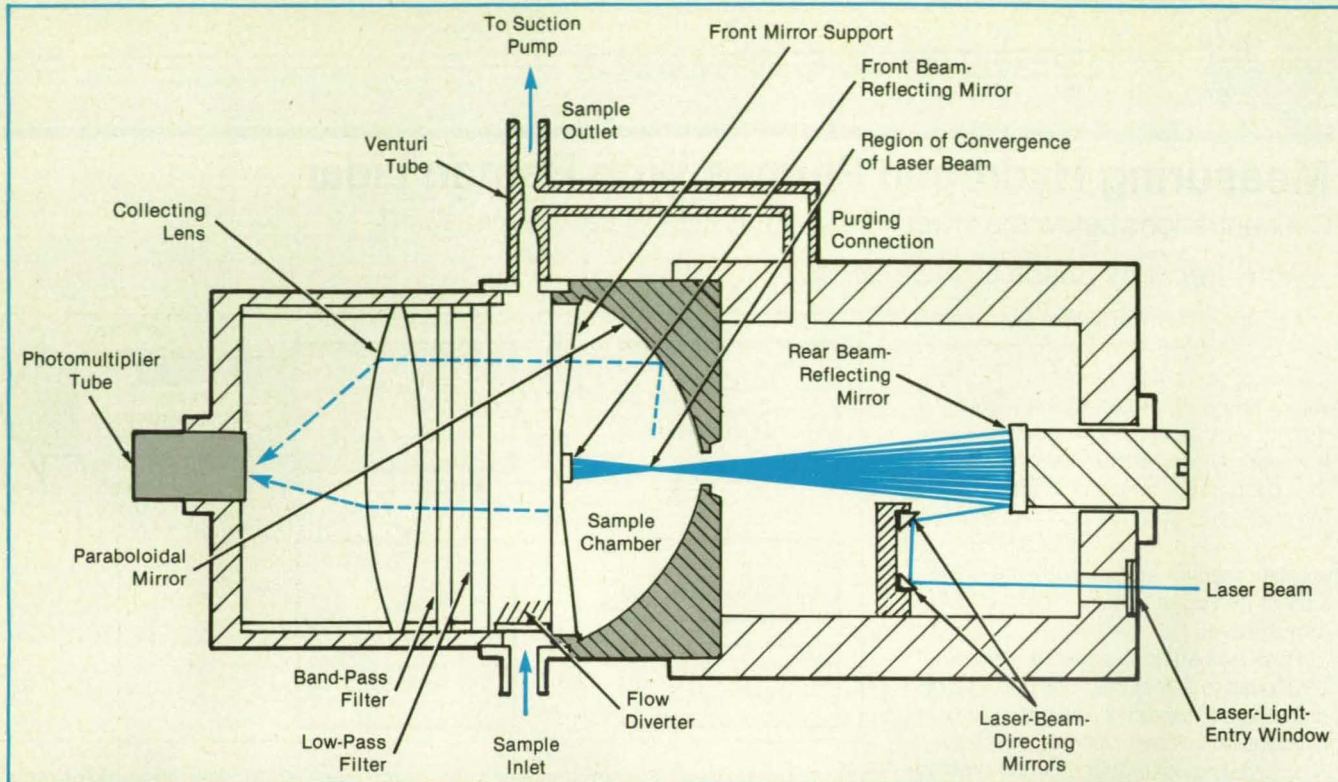

This **Raman-Emission Detector** features an improved Raman-light-collection scheme that increases sensitivity and an improved flow geometry that reduces stabilization time.

tion, Circle 66 on the TSP Request Card.
Inquiries concerning rights for the com-

mercial use of this invention should be ad-
dressed to the Patent Counsel, Kennedy

Space Center [see page 20]. Refer to
KSC-11521.



(Model 4612B shown)

MAGTROL AUTORANGING POWER ANALYZER

*Displays simultaneous Amps/Volts/Watts with
power factor, integrating capability and built-in
IEEE-488 computer interface.*

- **MODEL 4612B**, 1 ϕ , DC-1KHz, to 50A
- **MODEL 4614B**, 3 ϕ , DC-2.5KHz, to 100A

Rugged, all-in-one, multi-purpose analyzers, combine the capabilities of several conventional units. All ranging and operating mode selection is either push-button or IEEE-488 controlled. Lets you establish the energy efficiency of virtually any electrical appliance, motor or device. Integrating capability shows average power usage over any desired period of time with continuously displayed running average; also displays power factor. True RMS volts and amps, with watts the average of the instantaneous values of VA. Push button, microprocessor controls... fool-proof selection. Plus many additional performance features.

CALL TOLL FREE: 800-828-7844

MAGTROL, INC.

70 Gardenville Parkway West, Buffalo, New York 14224
In NYS Phone: (716) 668-5555



A calendar featuring breathtaking four-color photographs of the space shuttle in action, photos taken by the crew of a space shuttle mission, views of the earth and more! Dates and space launches from the 1960s to present included. Printed on deluxe coated stock with laminated colorful covers. Only \$10.95.

Send NASA Calendar(s) at \$10.95 each (quantity) _____

Add \$5.00 for shipping and handling charges _____

(NY residents add sales tax)

Orders from \$51.00 to \$100.00 add shipping
and handling charge \$8.50

TOTAL ENCLOSED _____

Name _____

Company _____

Address _____

City/State/Zip _____

Mail to: NASA Tech Briefs, Dept. F, 41 East 42nd St., # 921
New York, New York 10017

For credit card orders call (212) 490-3999

Acousto-Optical Imaging Spectropolarimeter

This robust instrument takes polarization-specific images of solid surfaces and atmospheric sources.

Goddard Space Flight Center, Greenbelt, Maryland

The figure is a schematic diagram of an imaging spectropolarimeter designed around an acousto-optical tunable filter (AOTF). This is a robust instrument designed for use on the ground and aboard aircraft. It takes polarization-specific spectral images of terrestrial and nonterrestrial sources, including solid surfaces, aerosols, and absorption and emission phenomena in the gas phase, at wavelengths from 500 to 1,000 nm.


A tunable solid-state filter operates on the principle of acousto-optical diffraction in a birefringent medium. The spatial period of the diffraction grating in the medium is the wavelength of a radio-frequency acoustic excitation introduced into the medium via a transducer. The spectral passband of the filter can be tuned rapidly by changing the frequency of the acoustic excitation.

From the perspective of designing an imaging spectropolarimeter, an acousto-optical tunable filter offers multiple advantages over more conventional optical filters that are made adjustable or selectable by mounting them in filter wheels. These advantages include higher spectral resolving power, highly specific selection of polarization, larger optical aperture, all-solid-state operation (no sliding or rotating parts), and faster tunability.

The tunable acousto-optical filter in the GSFC imaging spectropolarimeter is made of TeO_2 , a birefringent material that has desirable acousto-optical properties, including a relatively high figure of merit, which provides high throughput and spectral resolving power. The filter is said to be noncollinear, meaning that the acoustical and optical signals do not propagate col-

linearly everywhere within the TeO_2 medium; noncollinearity offers some flexibility in design. The instrument includes an all-reflective optical relay assembly that includes a single ellipsoidal mirror. The combination of the filter and relay optics forms side-by-side, orthogonally polarized spectral images on a charge-coupled-device camera. The spectral coverage of the instrument is limited by the spectral response of the charge-coupled device and the frequency limitations of the radio-frequency matching network at the transducer.

This work was done by Babak Saif, David Glenar, Robert Zimmerman, and Bernard Seery of Goddard Space Flight Center. For further information, Circle 29 on the TSP Request Card.
GSC-13461

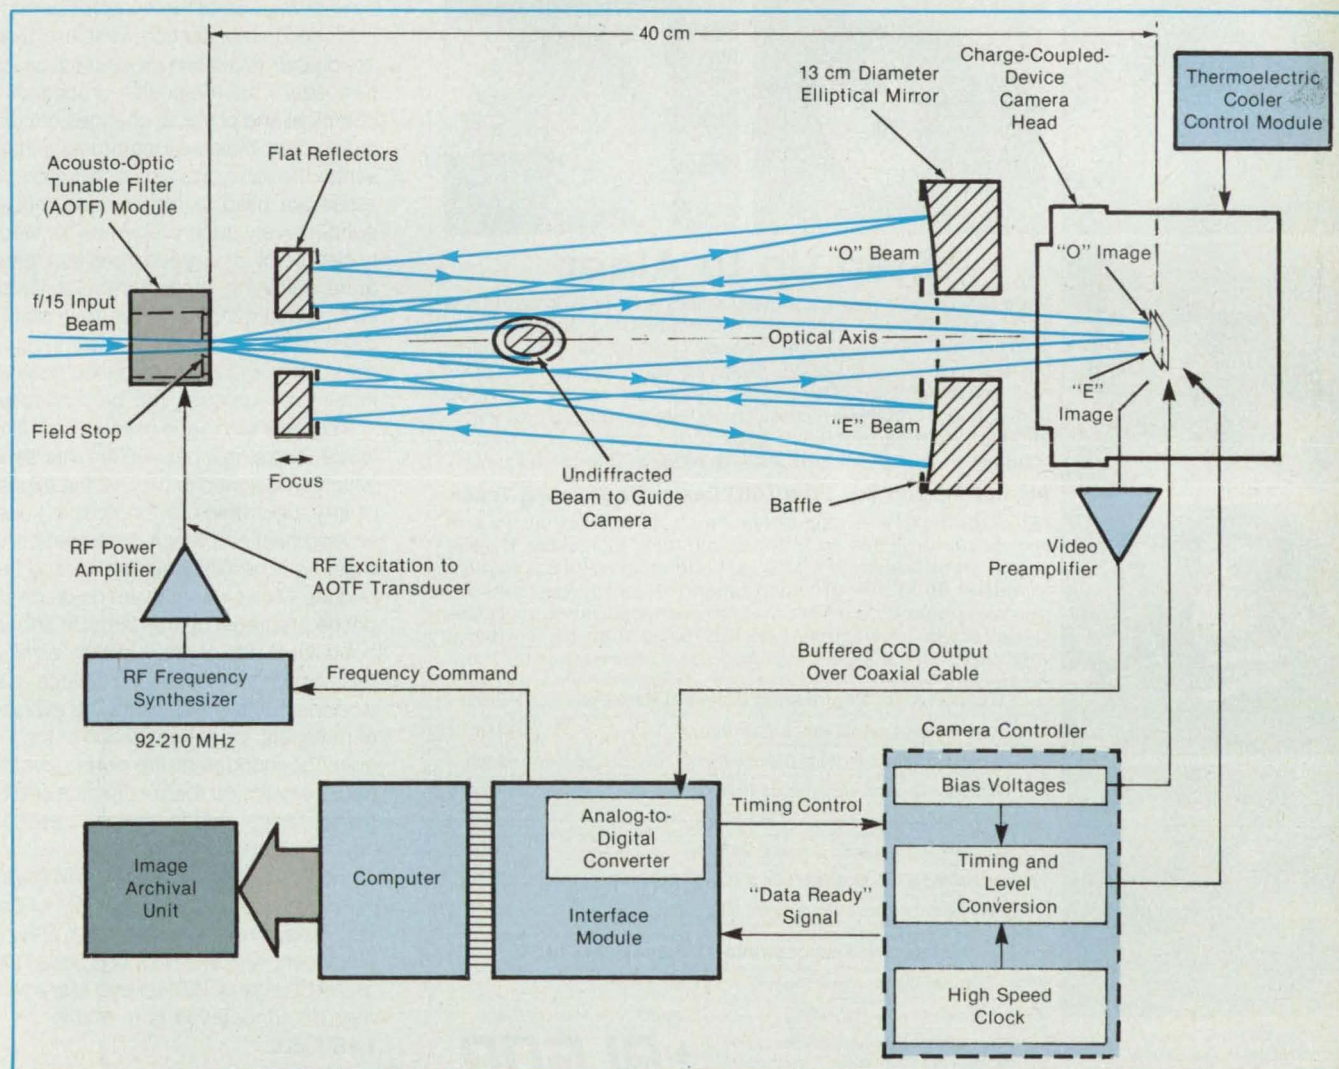

The **Acousto-optical Imaging Spectropolarimeter** produces side-by-side spectral images in two mutually perpendicular polarizations, one corresponding to the ordinary ("O"), the other corresponding to the extraordinary ("E") waves in the acousto-optical material. This instrument offers a relatively large aperture, high resolving power, and rapid tunability, with no moving parts.

Monitoring Polymer Curing Via Electromagnetic Impedance

Continuous frequency-dependent measurement and analysis are performed during the curing cycle.

Langley Research Center, Hampton, Virginia

A new nondestructive in-situ electromagnetic-impedance measurement technique has been developed, as both a research and production tool, for sensing the cure-processing properties of high-temperature, high-performance thermoset and thermoplastic resins. Frequency-dependent impedance measurements are of par-


ticular importance in assuring the quality of a polymer resin and controlling the resin-curing processes. This type of technique is one of only a few instrumental techniques available for monitoring and measuring the molecular properties of a polymeric resin in both the liquid and solid states. This technique is advantageous in

its ability to study the curing process in both laboratory and production settings, and it can be used to examine properties continuously as the resin transforms from a monomeric liquid of varying viscosity to a cross-linked insoluble, high-temperature solid.

The technique emphasizes continuous frequency-dependent measurement and analysis throughout the cure cycle. The instrumentation can measure the complex permittivity, an intrinsic polymer property, over nine orders of magnitude (10^{-3} to 10^6) and six decades of frequency (Hz to MHz) at temperatures up to 400 °C. The Hz-to-MHz frequency range is advantageous as it senses both ionic and dipolar diffusion processes and minimizes electrode-polarization problems. The frequency dependence of the complex permittivity is used to monitor both ionic and Debye-like dipolar relaxation processes, which in turn serve as molecular probes of the chemical and physical changes occurring during cure. Molecular parameters that describe the ionic and dipolar diffusion processes are used to monitor and measure quantitatively such properties as viscosity, degree of cure, glass-transition temperature, softening, melting, recrystallization, and solvent content. Moisture contents in thermosets and thermoplastics can be measured, and changes due to heating or long-term exposure can be monitored.

This new technique uses a commercially licensed single passive laminar sensor, which is designed to prevent the exposure of any electronics to the hostile sensing environment and which is compatible with most commercially available impedance bridges. Measurements are made on composite prepregs, on thin films, in adhesive bond lines, and on thick laminates at various positions. Applications include use as a nondestructive means for the evaluation of materials, for determination of the "window" boundaries of the curing cycles of newly developed thermoplastics and thermoset resins, and for online, closed-loop control of curing cycles.

This work was done by William T. Freeman and John C. Covington of Langley Research Center and David E. Kranbuehl, Melanie Hoff, and Susan Delos of the College of William and Mary. No further documentation is available.
LAR-13802

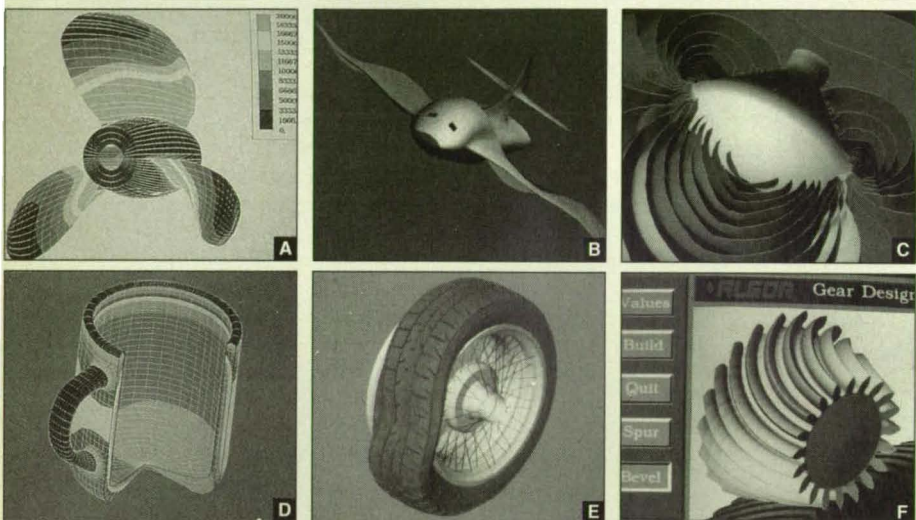

Step Up to Algor

More than 6,000 engineers in 50 states and over 60 countries have stepped up to Algor, the most advanced finite element analysis and design software money can buy. All FEA models on this page were designed, analyzed and visualized on a PC with Algor software. The largest contains more than 24,000 nodes and 13,000 elements. Other Algor analysis packages include buckling, nonlinear gap/cable, specialized vibration, composite elements, kinematics/dynamics, piping and more.

Algor, a PC and You...The Total Design/Engineering Team

Algor, the world's leading design/analysis software for PCs, is specifically designed to fully exploit their increasing level of power. Tight bridges to CAD/CAM and other software create a seamless fit into your environment. Algor design software provides parametric design and results visualization tools (see actual screen photographs on this page) that are worthy of your expertise and creativity. And the engineering is built in.

Typical Algor Engineering Software Packages		Price
A	Linear Stress Analysis with ViziCad Plus	\$1500
B	Stress, Vibration and Mode Shape Analysis with ViziCad Plus	\$2100
C	Fluid Flow Analysis with ViziCad Plus	\$1100
D	Heat Transfer Analysis with ViziCad Plus	\$1800
E	Accupak—3-D Nonlinear Stress & Vibration	\$2500
F	Iconnex V EAGLE, Concurrent Engineering & Design Optimization	\$2300
G	Electrostatic Analysis with ViziCad Plus	\$1600

H Interactive Demonstration/Tutorials - \$19 to \$49		
Finite Element Analysis	Heat Transfer	Fluid Flow
Electrostatic	PipePlus	Free 36-Page Product Guide

Your current PC has more computing power than your last one. Your next PC will have even more. Algor software is constantly updated to take advantage of the power of new PCs.

ALGOR
150 Beta Drive
Pittsburgh, PA 15238-2932 USA
412-967-2700 Fax: 412-967-2781
In California: 714-564-2541

GSA Contract # GS 00 K 89 AGS 6270 PS01

For More Information Circle No. 449

Notes: 386/486 Prices, shown in U.S. \$, may change at any time. 386/486 software uses extended memory. Weitek coprocessor and selected Unix workstation versions available. Algor software is subjected to nuclear power industry Quality Assurance standards.

Books and Reports

These reports, studies, handbooks are available from NASA as Technical Support Packages (TSP's) when a Request Card number is cited; otherwise they are available from the National Technical Information Service.

Physical Models in GPSOMC Software

Contributions to range and phase observables and the partial derivatives thereof are described.

A report describes the physical models incorporated into GPSOMC, the modeling module of the GIPSY software, which processes geodetic measurements in the Global Positioning Satellite (GPS) system. This report is a corrected, expanded, and updated version of JPL Publication 87-21, which was dated September 15, 1987.

A detailed explanation of the special meanings of "observables" and variants thereof in the special context of the report is essential to a description of the report. In the GPS system, distances (called "ranges") from GPS satellites are measured on the basis of detected phases of electromagnetic signals. In a given instance, the "physical observable" is the difference between the reference phase of the transmitter at the instant of emission and the reference phase of the receiver at the instant of reception. An "observed observable" is one that is related in a prescribed way to the physically detected phase. A "computed observable," closely related to a physical observable, is one that is defined in terms of differences between clocks, e.g., the difference between the reference phase defined, in turn, by the station clock at the receiver and the reference phase defined, in turn, by the clock in the orbiting transmitter.

In interpreting measurements of range from GPS satellites, the observables are passed through a multiparameter estimation routine ("filter") to estimate the parameters of models. These models describe the spacecraft orbits and the motions of the receivers fixed to the Earth. The model also supplies, to the filter, a priori values of computed observables and the partial derivatives of the computed observables with respect to the parameters of the models. The report describes the portion of the software that models the locations of the receivers and the motions of the whole Earth and computes the observables and partial derivatives.

The major components of the models are discussed in sections 2 through 5 of the report. Section 2 defines the coordinate frame for the model and establishes methods for calculating the position of the receiver in that frame by use of the best current models of the motions of the whole Earth and of local tidal deformations. Sec-

tion 3 defines the observables and the intimately associated models of the behaviors of the clocks in GPS satellites and receiving ground stations. Section 4 presents the model used to describe the passage of GPS signals through the troposphere. All the partial derivatives of observables with respect to parameters of the models are given in section 5. Values of the physical constants used in the GPSOMC software and a complete list of the parameters available for adjustment are given in the appendixes.

This work was done by Ojars J. Sovers and James S. Border of Caltech for NASA's Jet Propulsion Laboratory. To obtain a copy of the report, "Observation Model and Parameter Partial for the JPL Geodetic GPS Modeling Software GPSOMC," Circle 71 on the TSP Request Card. NPO-18241

Soot-Free Combustion of Methane and LNG

No soot builds up when these fuels are burned with liquid oxygen.

Experiments have shown that neither methane nor liquefied natural gas (LNG) produces soot when burned in a turbine simulator with liquid oxygen under conditions like those in the gas-generator section of a rocket engine. The experiments

were conducted to determine whether these fuels behave similarly to some other hydrocarbon fuels, which give off soot that coats turbomachinery and reduces performance.

The fuels were burned at various combinations of fuel/oxygen-mixture ratio, chamber pressure, and rate of flow. LNG (about 92 percent of which was methane) was tested at mixture ratios from 0.24 to 0.58, chamber pressures from 840 to 1,370 psia (5.8 to 9.4 MPa), and a total-mass-flow rate of about 1.5 lb/s (about 0.7 kg/s) with a fine-pattern triplet injector to examine the effect of low-purity methane on the deposition of carbon. Seven tests were made, each lasting 200 s. No appreciable buildup of carbon was found in the small-scale turbine simulator.

Pure methane was tested at mixture ratios from 0.23 to 0.81, chamber pressures from 925 to 2,210 psia (6.4 to 15.2 MPa) and a total-mass-flow rate of about 14 lb/s (about 6.4 kg/s). To examine the effect of injection densities of methane representative of those of a full-scale engine, a coarse-pattern triplet injector was used. As in the nine tests of LNG, no appreciable buildup of carbon was detected.

This work was done by John Bossard of Aerojet TechSystems for Marshall Space Flight Center. To obtain a copy of the report, "Soot Free Operation of LOX-Methane Gas Generators," Circle 124 on the TSP Request Card. MFS-28561

The Modgraph Super-VGA Monitors



- 8.5" Display
- 800x600 Resolution
- Sony Trinitron CRT
- .26mm Dot Pitch
- Open Chassis or Full Enclosure

For high resolution graphics and data applications, these Super-VGA display monitors offer the OEM, System Integrator, and end-user a high quality Trinitron-based display in a compact package.

Offered in industrial, open frame, or desktop tilt and swivel enclosures, these monitors are designed to meet size and weight sensitive applications. Call 1-800-327-9962 for further information.



Modgraph

83 Second Avenue
Burlington, MA 01803

DEALER/OEM/VAR
Inquiries Invited



Nearly Azeotropic Mixtures To Replace Refrigerant 12

These mixtures would cause less damage to the ozone layer of the atmosphere.

NASA's Jet Propulsion Laboratory, Pasadena, California

Measurements have indicated that a number of nearly azeotropic fluid mixtures have saturation pressures similar to that of Refrigerant 12 (R12, dichlorodifluoromethane, CCl_2F_2) while being about 2% as damaging as R12 is to the ozone layer in the atmosphere. Moreover, these mixtures are of low toxicity, are nonflammable, and are more compatible with conventional lubricating oils than is Refrigerant 134a (R134a, 1,1,1,2-tetrafluoroethane, CH_2FCF_3 ; boiling temperature -27.89°C), which is now the leading replacement for R12. The mixtures may be usable in commercial, automotive, and household refrigerators and air conditioners.

R12, now used in many refrigerators and air conditioners, is known to leak from these machines and ascend into the upper atmosphere, where it damages the ozone layer. One of the proposed replacements, R134a, does not damage the ozone layer because it contains no chlorine. But because of its lack of chlorine, conventional lubricating oils do not dissolve as well in it, and consequently compressors are likely to fail prematurely through non-lubricated wear. Dupont has recently patented an oil-compatible ternary mixture of R22 (chlorodifluoromethane, CHClF_2 ; boiling temperature -40.76°C), R152a (1,1-difluoroethane, CHF_2CH_3 ; boiling temperature -25.00°C), and R124 (2-chloro-1,1,1,2-tetrafluoroethane, CHClFCF_3 ; boiling temperature -12.00°C). Because the boiling temperatures of these three fluids differ significantly, and because the mixture of them is not azeotropic, leaks could substantially change the composition and, thereby, the pressure characteristics of this fluid.

A thorough search of fluids and hundreds of measurements provided five nearly azeotropic mixtures (see table) of R134a, R152a, R124, and R142b (chlorodifluoroethane, CH_3CClF_2 ; boiling temperature -9.70°C) that have low boiling-point spreads, low toxicity, and low ozone-damaging capability, that are nonflammable, and that are more compatible with conventional oils than is R134a. The data from the tests indicate that the pressure of any of the combinations in the table is nearly equal to the pressure of R12, and thus the mixtures may be a good "drop-in substitute" for R12. Because the mixtures are nearly azeotropic, the overall composition should not be significantly altered by leakage.

In addition to R134a, R152a also has no ozone-depletion potential. R124 and R142b both have ozone-depletion potentials that are less than 5 percent of that of R12. Thus all five of the mixtures of the table have ozone-depletion potentials about 2% that of R12. The five mixtures are nonflammable, although R152a and R142b by themselves are flammable. Because R124 and R142b both contain chlorine, they are expected to dissolve oil more effectively than R134a does; the addition of them to R134a is therefore expected to help R134a dissolve conventional lubricating oils.

This work was done by Jack A. Jones of Caltech for NASA's Jet Propulsion

Laboratory. For further information, Circle 122 on the TSP Request Card.

In accordance with Public Law 96-517, the contractor has elected to retain title to this invention. Inquiries concerning rights for its commercial use should be addressed to

Edward Ansell
Director of Patents and Licensing
Mail Stop 305-6
California Institute of Technology
1201 East California Boulevard
Pasadena, CA 91125

Refer to NPO-18030, volume and number of this NASA Tech Briefs issue, and the page number.

MIXTURES			
Mixture Number	Component A	Component B*	Component C*
1	$0.5 < \text{R134a} < 1.0$	$\text{R124} < 0.5$	
2	$0.5 < \text{R134a} < 1.0$	$\text{R142b} < 0.5$	
3	$0.5 < \text{R134a} < 1.0$	$\text{R124} < 0.5$	$\text{R142b} < 0.5$
4	$0.5 < \text{R134a} < 1.0$	$\text{R152a} < 0.5$	$\text{R124} < 0.5$
5	$0.5 < \text{R134a} < 1.0$	$\text{R152a} < 0.5$	$\text{R142b} < 0.5$

* $0.0 < (\text{B} + \text{C}) < 0.2$
Proportions of component refrigerants are given in mole fractions.

These **Binary and Ternary Nearly Azeotropic Mixtures** of liquids are potential replacements for Refrigerant 12, which is now commonly used. Each of these mixtures has an ozone-depletion potential less than one-hundredth that of Refrigerant 12.

IDENTIFICATION OF COMPONENT REFRIGERANTS			
Refrigerant	Formula	Name	Normal Boiling Temperature, $^\circ\text{C}$
R134a	CH_2FCF_3	1,1,1,2-Tetrafluoroethane	-27.89
R152a	CHF_2CH_3	1,1-Difluoroethane	-25.00
R124	CHClFCF_3	2-Chloro-1,1,1,2-tetrafluoroethane	-12.00
R142b	CH_3CClF_2	Chlorodifluoroethane	-9.70



APOLLO COMMEMORATIVE POSTER—

Actual size: 30" x 21" In Full Color!

Relive mankind's greatest adventure with this official NASA commemorative poster. Printed on high-quality poster stock and shipped in a protective tube. Price only \$8.95 each plus \$5.00 for handling and mailing.

Mail payment to: NASA Tech Briefs, Dept. F
41 East 42nd Street, Rm 921
New York, New York 10017

For credit card orders call: (212) 490-3999

Removing Undesired Fine Powder From Silicon Reactor

The flow of gas from a fluidized bed sweeps the smallest particles away.

NASA's Jet Propulsion Laboratory, Pasadena, California

The fluidized-bed reactor shown in the figure is designed to produce highly pure polycrystalline silicon particles that have diameters $\geq 400 \mu\text{m}$. The reactor operates by the pyrolysis of silane in a reaction zone, which is a bed of silicon seed particles (diameters 50 to 400 μm) fluidized by the flow of silane and possibly a carrier gas. Above the reaction zone lies an entrainment zone, where the gas mixture flows rapidly enough to entrain a significant proportion of the silicon powders, (particles that have diameters less than a few microns) — but not a significant proportion of the larger seed and product silicon particles. The entrained particles are swept out of the reactor by the fluidizing gas. The concept may also be applicable to such other processes as the production of fine metal and ceramic powders in which careful control of the sizes of product particles is needed.

Usually, the highly pure polycrystalline silicon product particles are intended to serve as the starting material for the preparation of single crystals of silicon by the single-crystal-pulling technique. Silicon powder is undesirable in this application because instead of melting readily, the powder floats on the surface and deposits around the newly formed single-crystal rod. Furthermore, the powder particles are more susceptible to contamination than the larger particles are because the powder particles have more surface area per unit mass. Finally, it is difficult to handle micron-to-submicron-sized particles of silicon powder.

Silicon powder results from the homogeneous decomposition of silane (direct decomposition of silane into silicon and hydrogen from within the gas phase) rather than from the heterogeneous decomposition of silane (decomposition of silane by deposition of silicon onto the surfaces of silicon particles). This undesired homogeneous decomposition can be lessened by reducing the temperature of the reaction zone or by maintaining a low concentration of silane in the reaction zone. However, these measures would also slow the desired heterogeneous decomposition. The use of the entrainment zone makes it possible to maintain conditions for more-efficient heterogeneous decomposition in the reaction zone, while removing the undesired silicon powder from the fluidized bed.

The required velocity of flow in the entrainment zone can be calculated from


such parameters as the density and viscosity of the gas and the sizes, shapes, and void fractions of the particles. The required flow in the entrainment zone can then be maintained by use of a suitable input flow of silane and carrier gases and/or by a suitable decrease in the cross section of the reactor in the entrainment zone. Typically, flow speeds of 0.1 to 4.8 ft/s (0.03 to 1.5 m/s) should suffice to remove at least 50 percent of the silicon powder but not to entrain a significant amount of the larger product silicon particles.

This work was done by Robert N. Flagella of Union Carbide Corp. for NASA's Jet Propulsion Laboratory. For further information, Circle 120 on the TSP Request Card.

In accordance with Public Law 96-517, the contractor has elected to retain title to this invention. Inquiries concerning rights for its commercial use should be addressed to

Morris N. Reinisch
Union Carbide, Inc.
Law Dept. — Patent Section
39 Old Ridgebury Road
Danbury, CT 06817-0001

Refer to NPO-18323, volume and number of this NASA Tech Briefs issue, and the page number.

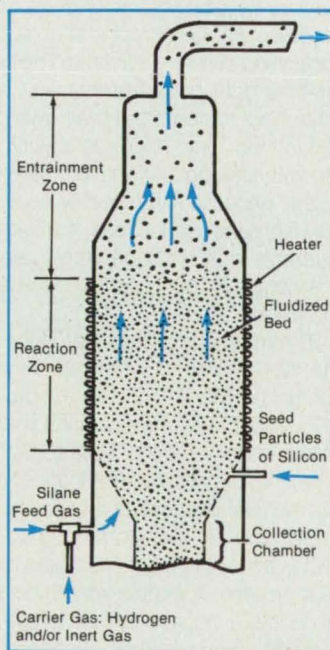

This **Fluidized-Bed Reactor** includes an entrainment zone above the fluidized-bed reaction zone. The fluidizing gas flows rapidly enough in the entrainment zone to carry away fine particles of silicon.

18 position sensors immune to

- Cutting fluids
- Water
- Oil
- Humidity
- Dirt
- Metal shavings
- Smoke
- Radiation
- RF fields

Kaman's inductive noncontact sensors are virtually unaffected by what's in the environment, giving them significant advantages over other sensing technologies. Designed for industrial use, they can, for example, size nonmagnetic metal parts as they're machined, control position in closed-loop systems, or determine level of molten metals. Plus Kaman's systems outperform others in resolution (down to submicroinch) and frequency response (0 to 50kHz). 18 sensors in 0.08 to 6.0-inch diameters. Full-scale measuring range from 0.001 to 4.0 inches. Call for details.

Kaman Instrumentation Corp.
1500 Garden of the Gods Rd.
Colorado Springs, CO 80907
719-599-1825
Fax 719-599-1823
800-552-6267

KAMAN

The Next Time, Why Not REALLY Change Your Oil!



After an initial treatment of 8 ounces, just 4-ounces of Tufoil into the crankcase at each oil change will turn ordinary oil into a

PATENTED ENGINE TREATMENT.

Here's what you'll experience....

EASIER STARTS - Due to the protection your engine will have at that crucial oil-less period.

SMOOTHER OPERATION: The drastic reduction in friction gives your engine a slippery surface to run smoothly, virtually trouble-free!

BETTER GAS MILEAGE: You'll save plenty at the gas pumps since your engine doesn't have to work as hard and requires less energy to run.

LONGER ENGINE LIFE: Naturally, if your engine doesn't have to work as hard, it will last a lot longer...in many cases, twice as long.

One 8 oz. - \$ 17.75 (ship. incl.)
Two 8 oz. - 29.00 (ship. incl.)
1 Quart - 38.95 (ship. incl.)
1 Gallon - 131.00 (ship. incl.)

1-800-922-0075

ORDER TODAY



Fluoramics, Inc. NTB892

18 Industrial Avenue
Mahwah, NJ 07430

My check or money order for \$ _____ is enclosed.
Charge my credit card:

☐ Am. Express ☐ Master Card ☐ Visa
Card No. _____

Exp. Date _____

Phone No. _____

Name _____

Address UPS Shipping Address _____

City _____

State _____ Zip _____

(N.J. residents please add 7% sales tax).



Computer Programs

COSMIC: Transferring NASA Software

COSMIC, NASA's Computer Software Management and Information Center, distributes software developed with NASA funding to industry, other government agencies and academia.

COSMIC's inventory is updated regularly; new programs are reported in *Tech Briefs*. For additional information on any of the programs described here, circle the appropriate TSP number.

If you don't find a program in this issue that meets your needs, call COSMIC directly for a free review of

programs in your area of interest. You can also purchase the annual *COSMIC Software Catalog*, containing descriptions and ordering information for available software.

COSMIC is part of NASA's Technology Utilization Network.

COSMIC* John A. Gibson, Director,
Phone (706) 542-3265 ; FAX (706) 542-4807
The University of Georgia, 382 East Broad Street,
Athens, Georgia 30602

Computer Programs

These programs may be obtained at a very reasonable cost from COSMIC, a facility sponsored by NASA to make computer programs available to the public. For information on program price, size, and availability, circle the reference number on the TSP and COSMIC Request Card in this issue.



Mathematics and Information Sciences

Transportable Applications Environment Plus

Users can construct custom user interfaces for their own application programs.

Transportable Applications Environment Plus (TAE+) is an integrated, portable computer program that provides an environment for developing and running interactive window, text, and graphical object-based application software systems. The program enables both programmers and nonprogrammers to construct their own custom application user interface easily and to move those applications to different computers. Because TAE+ can be used repeatedly for many applications, it provides considerable cost savings when used as a company's primary user interface development tool.

The main components of TAE+ are (1) the WorkBench, a what-you-see-is-what-you-get (WYSIWYG) tool for the design and layout of a user interface; (2) the WPT's (Window Programming Tools) software package, a set of callable subroutines that control the user interface of an application program; and (3) TAE Command Language (TCL), an easy-to-learn command language that provides a simple way to develop an executable application prototype with a run-time-interpreted language.

The WorkBench enables the developer of an application program to construct the layout of the display screen interactively by manipulating a set of interaction objects, including such input items as but-

tons, icons, and scrolling lists. Also included are such data-driven graphical objects as dials, thermometers, and strip charts, which TAE+ updates as the values of the data change. The WorkBench includes drawing tools for creating icons and the graphics associated with data-driven objects. As a developer's tool, it also provides the capability to define "connections" between interaction objects dynamically, rehearse the designed user interface, save the user interface details in a resource file, and generate fully annotated and operational source code (in C, Ada, FORTRAN, and TCL). This WorkBench-generated code includes calls to the TAE+ runtime services (WPT's), which use the details saved in the resource file to control the entire user interface and, thus, supply a bridge between the development and runtime environment. Since the WPT's access the resource file during execution, the user interface details remain independent from the application code, allowing changes (e.g., color, front screen location, type of object) to be made easily without recompiling or relinking the application software.

In addition to WPT's, TAE+ offers control of interaction objects from the interpreted TAE Command Language. TCL provides an extremely powerful means for the more experienced developer to develop quickly a prototype of an application's user interface without the overhead of compiling or linking.

TAE+ uses the MIT X-Window System as the underlying windowing standard. The WorkBench and WPT's are written in C++, and the remaining code is written in C. TAE+ is available by license for an unlimited time. The licensed program product includes the TAE+ source code and one set of supporting documentation. Recommended minimum memories of 8 MB and 50 MB in disk space are required to load the TAE+ TAR tape. This tape includes the Free Software Foundation's C++ compiler (GNU's C++). TAE+ was developed in 1989.

TAE+ is available in a form suitable for six different groups of computers: (1) DEC, VAX station and other VMS VAX'es (specify TK50 or 9-track VMS Backup format), (2)

More Processing Gain !

*Gain the advantage in your signal processing designs with
Xmath™ and the **Signal Analysis Module™***

Only Xmath provides an advanced mathematical analysis environment for your X Window™ workstation. Add the Signal Analysis Module, and you have everything you need to generate signals and noise, model channel effects, and perform waveform analysis.

SAM—the Signal Analysis Module

The SAM gives you full featured function generators, extensive noise generators, modulators/demodulators, A/D and sample and hold models, TFRs, spread spectrum signal generators and much more.

Interactive graphics

Zoom in for signal details, add text, change colors and viewing angles, or draw in shapes and arrows.

Object-oriented MathScript™

More than just matrices! Xmath's unique object-oriented language gives you fast execution and frees you to function at a higher level of data abstraction.

Programmable GUI

Xmath's new programmable GUI layer lets you develop tools which take full advantage of the X Window interface, with no C or Fortran programming.

Intuitive User Interface




Pull-down menus, variable windows, object editors, and the Hypertext Help utility make Xmath easy to learn and use.

For more gain in your signal processing designs give us a call at 1-800-932-MATH and we'll send you a FREE Xmath/SAM Demo for X Window workstations.



3260 Jay Street • Santa Clara, California 95054
Tel: 408.980.1500 • Fax: 408.980.0400
e-mail: xmath-info@isi.com

For More Information Circle No. 343

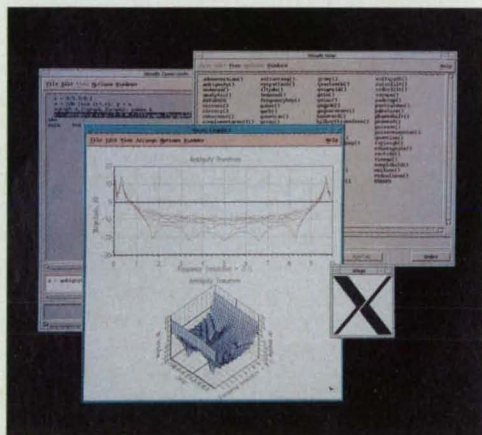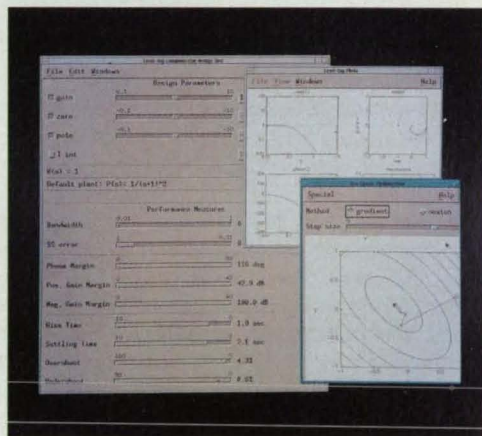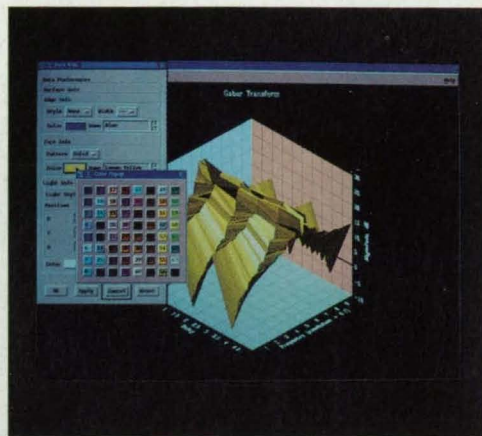

© 1992 Integrated Systems, Inc. All rights reserved. Xmath and MathScript are trademarks of Integrated Systems, Inc. Signal Analysis Module is a trademark of ELANIX, Inc. X Window is a trademark of the Massachusetts Institute of Technology.

Object-oriented Analysis For Signal Processing. Xmath

Macintosh II computers running AUX [on 1/4-in. (6.35-mm) miniature tape cartridge in Unix TAR format], (3) Apollo Domain Series 3000 [on 1/4-in. (6.35-mm) cartridge in TAR format], (4) DEC VAX and RISC workstations running Ultrix (TK50 in TAR format), (5) Sun 3- and 4-series work stations running Sun OS and IBM RT/PC's and PS/2's running AIX [on 1/4-in. (6.35-mm) Sun cartridge in TAR format], and (6) HP 9000 Series 800 workstations (HP preformatted, 16-track cartridge tape in TAR format).

This program was developed by the Data Systems Technology Division of Goddard Space Flight Center. For further information, Circle 19 on the TSP Request Card.

GSC-13277/78

Curvilinear-Interpolation Program

INTERP2 performs a polynomial interpolation based on the true relationship among known values.

Determining the value of a function at a point between points specifically defined in a table is a common task for scientists and engineers. This process, called interpolation, ranges from the simplicity of linear regression to the complexity of time-consuming algorithms, depending on the accuracy required. INTERP2 is an interactive, easy-to-use computer program that uses the speed of a computer to execute a complicated mathematical process that solves interpolation problems quickly and accurately.

Interpolation based on a straight-line correlation among the given data points ignores all but two data points close to the unknown point, and is therefore unable to account for any effects of curvature. This is why curvilinear interpolation, a complicated method, is often necessary when a highly accurate value is required. INTERP2 solves for an unknown value based on the true relationship among given values, whether that relationship is linear or nonlinear. Using the technique of the Lagrange interpolating polynomial, INTERP2 "draws" a curve through the input data points and then interpolates to obtain the unknown $f(x)$ for a known x expediently.

INTERP2 is written in BASIC for an IBM-PC-compatible computer running the MS-DOS operating system. A short explanatory text file and the executable code are included with the source code. INTERP2 was developed in 1989 and requires 37 Kb of memory.

IBM and IBM PC are registered trademarks of International Business Machines. MS-DOS is a registered trademark of the Microsoft Corp.

This program was written by Michael J. Coppi of Lockheed Space Operations Co. for Kennedy Space Center. For further information, Circle 14 on the TSP Request Card.

KSC-11497

Software for Integer Programming

IESIP implements an improved exploratory-search technique for pure integer linear-programming problems.

The Improved Exploratory Search Technique for Pure Integer Linear Programming Problems (IESIP) computer program addresses the problem of optimizing an objective function of one or more variables subject to a set of confining functions or constraints, by use of a method called discrete optimization or integer programming. Integer programming is based on a specific form of the general linear-programming problem in which all variables in the objective function and all variables in the constraints are integers. While more difficult, integer programming is required for accuracy in the mathematical modeling of systems that contain small numbers of components, such as in the distribution of goods, scheduling operations on machine tools, and scheduling production in general.

IESIP establishes a new methodology for solving pure integer-programming problems by utilizing a modified version of the univariate exploratory move developed by Robert Hooke and T. A. Jeeves. IESIP also takes some of its technique from the greedy procedure and the idea of unit neighborhoods. A rounding scheme involves the use of a continuous solution found by a traditional method (simplex or other suitable technique) and creates a feasible integer starting point. The Hook-and-Jeeves exploratory search is modified to accommodate integers and constraints and is then employed to determine an optimal integer solution from the feasible starting solution. The user-friendly IESIP enables the rapid solution of problems up to 10 variables in size (limited by DOS allocation). Sample problems compare IESIP solutions with the traditional branch-and-bound approach.

IESIP is written in Borland's TURBO Pascal for IBM PC-series computers and compatibles running DOS. Source code and an executable code are provided. The main memory requirement for execution is 25K. This program is available on a 5.25-in. (13.34-cm), 360K MS DOS format diskette. IESIP was developed in 1990.

IBM is a trademark of International Business Machines Corp. TURBO Pascal is registered by Borland International.

This program was written by F. R. Fogle

of Marshall Space Flight Center. For further information, Circle 152 on the TSP Request Card.
MFS-27260

Program Models Propagation of Failures

FIRM represents a hybrid between schematic-diagram and fault-tree approaches.

The FIRM computer program is a software tool for the identification of failures and the management of risk. FIRM is based on the directed-graph ("digraph") approach, which can be considered a hybrid between an approach based on schematic diagrams of systems and an approach based on fault trees. In a digraph model of failure, nodes are used to represent failures of components or functions, and connections between nodes are used to represent the propagation of failures among components or functions.

Failure is defined in terms of "reachability" of a component or process. The program can determine either reachability to a target or reachability from a source. Any node in the digraph can be chosen as a source, and FIRM will identify all nodes (singletons) or combinations of 2 (doubletons) or 3 (tripletons) nodes that can reach the target. FIRM can also identify loops in digraphs and display the direct failure paths between any two nodes.

The three core algorithms in FIRM are optimized for processing singletons and doubletons and can also handle tripletons. A unique feature is that FIRM solves for reachability for a given node without computing reachability for the entire digraph. No matrix computation methods are used. The algorithm thus implements essentially a real-time approach that enables the user to modify the digraph and immediately observe any changes in reachability for nodes of interest. The ability of FIRM to detect and print loops in digraphs enables users to develop large digraphs more easily. Its ability to display all direct failure paths between any two selected nodes in a digraph is useful in investigating failure-propagation scenarios contained in digraphs.

FIRM is written to be highly portable. It is written in C and can run on any computer that includes an ANSI standard C compiler. FIRM has been installed on Macintosh, IBM PC-series, DEC VAX, Amdahl, and Cray computers. The program can solve problems of unlimited size, depending only on the memory resources of the host computer. The memory required for the executable code ranges from 56 Kb on the Macintosh computer to 198 Kb on the Cray computer. Mathematical models require approximately 68 bytes per node. The program is available on a 5.25-in.

(13.34-cm) 360K MS-DOS-format diskette (standard medium) or a 3.5-in. (8.89-cm) Macintosh-format diskette. FIRM was developed in 1990.

Cray is a trademark of Cray Research, Inc. Amdahl is a trademark of Amdahl Corp. IBM PC is a trademark of International Business Machines. DEC and VAX are trademarks of Digital Equipment Corp. Macintosh is a trademark of Apple Computer, Inc.

This program was written by Donald B. Hackler, David T. Bui, and Fred J. Becker of Lockheed Engineering & Sciences Co. for Johnson Space Center. For further information, Circle 2 on the TSP Request Card.

MSC-21860

Program Handles Environmental-Test Data

S3DACS assists in the acquisition, recording, processing, and display of test data.

The S3 Data Acquisition and Control System, (S3DACS) computer program was developed for the Environmental Test Laboratory and Space Simulator at NASA's Jet Propulsion Laboratory. The program is used for monitoring, controlling, and recording information acquired during tests and presenting this information in various formats for easy access by a large number of users.

All testing is initiated by a setup procedure that defines what will be tested, limits to be checked, formulas to use, and the like. The results of tests (e.g., temperature, resistance) are then automatically stored in a data base for display in real time and for future reference. Measurement data thus obtained can be used in various computations defined for the test and selectively presented in tabular, graphical, or electronic form. Reports can be made to show current or historical events.

The S3DACS network software is written in FoxPro/LAN 1.02 and 80386 Assembler for IBM PC and compatible computers running MS-DOS 3.31 or higher. Required computing equipment includes the following: an 80386 33-MHz processor with 10 Mb of random-access memory (RAM) set up as a file server, an 80386 33-MHz processor with 4 Mb of RAM connected to a FLUKE 2240B or 2280 data-acquisition device, and an 80386 20-MHz processor with 5 Mb of RAM used as a workstation. Also needed is National Instruments circuit board that is compatible with a general-purpose interface bus (GPIB) to enable S3DACS to communicate with IEEE-488 control instruments.

Required software includes the following: Novell Network 386 for management of the network; FoxPro/LAN 1.02 for management of the data base; Version 5.0 of

QEMM 386 for management of the memory; and Version 4 of DGE, Saywhat, Viewlib, and DBSHOW for graphics and screen displays. The equipment listed in the preceding paragraph is the minimum that will allow installation of S3. Workstations and data-acquisition devices can be added transparently.

S3DACS is distributed on seven 5.25-in. (13.34-cm), 1.2-Mb MS-DOS-format diskettes. The extensive documentation includes a quick-reference guide, a software user's manual, a computer-systems-operator's manual, and a software programmer's manual. The source code is provided in PKZIP format, and the PKUNZIP utility is included. Compilation of the assembler source code requires version 5.10 of Microsoft's Assembler. Because of the complexity of this software package, COSMIC strongly recommends the purchase and review of the documentation prior to the purchase of the program. S3DACS was developed in 1990. S3DACS is a copyrighted work with all copyright vested in NASA.

All trade names used are the property of their respective corporate owners.

This program was written by Frances de Freitas Bart, Terry C. Fisher, and Claudia de Luna of Caltech for NASA's Jet Propulsion Laboratory. For further information, Circle 20 on the TSP Request Card.
NPO-18508

Program for Logarithmic Interpolation of Test Data

DATASPACE interpolates to the logarithmically increasing intervals that are preferred in some analyses.

Scientists and engineers work with the reduction, analysis, and manipulation of data. In many instances, the recorded data must meet certain requirements before standard numerical techniques can be used to interpret them. For example, the analysis of a linear viscoelastic material requires knowledge of one of two time-dependent properties — the stress-relaxation modulus $E(t)$ or the creep compliance $D(t)$ (when t = time) — one of which can be derived from the other by a numerical method if the recorded data points are evenly spaced or increasingly spaced with respect to the time coordinate. The difficulty is caused by the fact that most laboratory data are variably spaced, making the use of numerical techniques difficult. To reduce this difficulty in the case of the analysis of stress-relaxation data, NASA scientists developed the DATASPACE computer program to establish a logarithmically increasing time interval in the relaxation data. The program is generally applicable

BEI THE LITHIUM POWER SOURCE

When requirements demand high energy density lithium batteries specify BEI

BEI batteries are functioning safely and efficiently around the world in timing devices, memory circuits, and a myriad of other electrical/electronic applications; in aircraft radar and jet engine monitoring equipment; and in devices requiring high energy sources. They remain hermetic and operable at temperatures ranging from -55°C to $+200^{\circ}\text{C}$.

When your application calls for a stable, dependable energy source with predictable performance characteristics, BEI lithium/thionyl chloride batteries are the solution. BEI manufactures standard and custom-designed lithium cells and battery packs for a wide range of applications.

For more information, call/FAX for our FREE brochure.

BEI BATTERY ENGINEERING, INC.

1636 Hyde Park Avenue • Hyde Park, Mass. 02136 • 617-361-7555 • FAX: 617-361-1835

• Performance • Safety • Power • Reliability

1-800-685-4844

to any situation in which there is a need for increasingly spaced abscissa values in a set of data.

DATASPACE first takes the logarithm of the abscissa values, then uses a cubic-spline interpolation routine (which minimizes interpolation error) to create an evenly spaced array from the log values. This array is returned from the log abscissa domain to the abscissa domain and written to an output file for further manipulation. As a result of the interpolation in the log abscissa domain, the data are increasingly spaced. Stress-relaxation data processed in this way are spaced closely at short times and widely at long times, thus making it possible to avoid the distortion inherent in evenly spaced time coordinates. The interpolation routine gives results that compare favorably with the recorded data. The experimental data curve is retained, and the interpolated points reflect the desired spacing.

DATASPACE is written in FORTRAN 77 for IBM PC-compatible computers with math coprocessors running MS-DOS and for Apple Macintosh computers running MacOS. With minor modifications, the source code is portable to any computer that supports an ANSI FORTRAN 77 compiler. MicroSoft FORTRAN v2.1 is required for the Macintosh version. An executable code is included with the PC version. DATASPACE is available on a 5.25-in. (13.34-cm) 360K MS-DOS format diskette (standard distribution) or on a 3.5-in. (8.89-cm) 800K Macintosh format diskette. This program was developed in 1991.

IBM PC is a trademark of International Business Machines Corp. MS-DOS is a registered trademark of Microsoft Corp. Macintosh and MacOS are trademarks of Apple Computer, Inc.

This program was written by Frank E. Ledbetter II of Marshall Space Flight Center. For further information, Circle 150 on the TSP Request Card.
MFS-28551

Benchmark Lisp and Ada Programs

These programs can be used in several different ways to measure computational efficiency.

Some of the research of the Information Sciences Division at NASA Ames Research Center is devoted to the analysis and enhancement of processors and advanced computer architectures, specifically in support of automation and robotic systems. To compare the abilities of computers to process efficiently by use of the Lisp and Ada computing languages, scientists at Ames Research Center have de-

veloped a suite of nonparallel benchmark programs called ELAPSE. The benchmark suite was designed to be used in any or all of the following three tests: (1) comparing the efficiency of one computer processing via Lisp vs. processing via Ada; (2) comparing the efficiencies of several computers processing via Lisp; or (3) comparing several computers processing via Ada.

ELAPSE tests the efficiency with which a computer can execute the various routines in each language. The sample routines are based on manipulations of numbers and symbols and include two-dimensional fast Fourier transformations, Cholesky decomposition and substitution, Gaussian elimination, high-level data processing, and symbol-list references. Also included is a routine based on a Bayesian classification program that sorts data into optimized groups.

The ELAPSE benchmark programs are available for any computer equipped with a validated Ada compiler and/or Common Lisp system. Of the 18 routines in ELAPSE, 14 were developed or translated at Ames. The others are readily available through literature. The benchmark program that requires the most memory is CHOLESKY.ADA. Under VAX/VMS, CHOLESKY.ADA requires 760K of main memory. ELAPSE is available on either two 5.25-in. (13.34-cm), 360K MS-DOS format diskettes (standard distribution) or a 9-track, 1,600-bit/in. (630-bit/cm) magnetic tape in ASCII CARD IMAGE format. The contents of the diskettes are compressed by use of the PKWARE archiving software tools. The utility program PKUNZIP.EXE, which decompresses the files from the archival format, is included. The ELAPSE benchmark programs were written in 1990.

VAX and VMS are trademarks of Digital Equipment Corp. MS-DOS is a registered trademark of Microsoft Corp.

This program was written by Gloria Davis, David Galant, Raymond Lim, and John Stutz of Ames Research Center; J. Gibson of RECON Software; B. Raghavan of F.C.C.D.; P. Cheesema of Riacs-USRA; and W. Taylor of Sterling Software. For further information, Circle 109 on the TSP Request Card.

ARC-12980

Software Operates on Bit-Map Images

Thirteen programs enable the user to create, alter, and store images.

PIXTOOLS is a package of software for the Silicon Graphics IRIS consisting of thirteen programs plus a library for operating on bit-map images. The image data structure is denoted as a "PIXIMAGE." The pro-

grams enable the IRIS user to create and edit high-resolution images from the Sharp JX450 scanner and to save such images in the forms in which they are displayed on video screens, resize them, and capture them.

Images can be sent to the QMS laser printer, the Tektronix 4693 color thermal printer, and the Matrix QCRZ film recorder. In addition, images in PIX format can be converted to images in SGI format (and vice versa) or converted to images in PostScript format. Images in PIX or SGI format can be converted to ".ras" files, which can be read by the "rasp" routine in the PLOT3D/AMES program (available from COSMIC), and ".ras" files can be converted to PIX files.

Eleven of the programs print information and read and write files. Two of the programs — namely, PIXSCAN and PIX-EDIT — offer graphical interfaces. PIX-EDIT uses the full IRIS screen as a drawing area, and pop-up menus are available. The menus enable manipulation of images and background color and saving of an image on a screen to a file. PIXSCAN is the user interface to the Sharp JX450 scanner. This program enables the user to do a preliminary scan of an image at low resolution and then select an area to rescan in higher resolution into a file. To be able to use PIXSCAN, the user must have the general-purpose interface bus (GPB) circuit board (IEEE 488) and the "libgpb.a" library of software from Silicon Graphics, Inc. Instructions in the use of all the programs are provided in the form of UNIX on-line manual pages.

The PIXTOOLS programs are written in C language for execution on SGI IRIS 4D-series workstations running IRIX 3.2 or later. PIXEDIT (the largest program) requires 840K of main memory. The programs with graphical interfaces require that the IRIS have at least 24 bit planes. The package of programs is available on a 0.25-in. (6.35-mm) streaming-magnetic-tape cartridge in UNIX tar format. A README file and UNIX manual pages provide information regarding installation and use of the PIXTOOLS programs. A nine-page manual that provides slightly more detailed information may be purchased separately. PIXTOOLS was developed in 1990 and updated in 1991.

SGI, IRIS 4D, and IRIX are trademarks of Silicon Graphics, Inc. PostScript is a registered trademark of Adobe Systems Inc. UNIX is a registered trademark of AT&T.

This program was written by Diana Choi of Ames Research Center. For further information, Circle 72 on the TSP Request Card.

ARC-12830



Simple, Lightweight, Thermomechanical Coupling

Temperature-sensitive shape-memory wire activates cantilevered thermal contacts.


Goddard Space Flight Center, Greenbelt, Maryland

A self-actuating thermal coupling device is light in weight and transfers heat efficiently. The coupling is thermostatic, making and breaking thermal contact as necessary to maintain a nearly steady temperature at the hot side of the interface.

Unlike in some other heat-transfer devices, the heat is not transferred by direct contact between the hot and cold plates; instead, the heat is transferred via contact pins perpendicular to the hot and cold plates. The pins can be designed to provide a larger total cross-sectional area for transfer than do the plates; transfer thus proceeds more efficiently. Thermal conductance can be 5 to 20 times as great. Moreover, it is easier to fabricate the smoothly polished surfaces that are desirable for efficient transfer on the many small areas of the pins than on the large areas of the hot and cold plates. In addition, the new device does not require large, externally applied forces to maintain thermal contact between the hot and cold plates. It therefore does not need a large and massive supporting structure. Moreover, inasmuch as fluids are not used to transfer heat, there is no risk of spillage during connection and disconnection of the hot and cold assemblies, and the need for the elaborate seals and tight alignment tolerances of fluid couplings is eliminated.

The device includes many pins extending from the hot and cold plates. The contour of the thermal interface on a hot pin matches that of the thermal interface on the mating cold pin (see figure). A loop of wire made of a nickel/titanium or other alloy that has a shape memory links each hot pin with a retainer. When the temperature of the shape-memory wire rises above a critical value, the wire shrinks, pulling the

One of Many Hot Pins on a hot plate is poised near a cold pin, its cold-plate counterpart. As the temperature of the hot plate rises, the shape-memory wire contracts, drawing the hot pin against the cold pin.

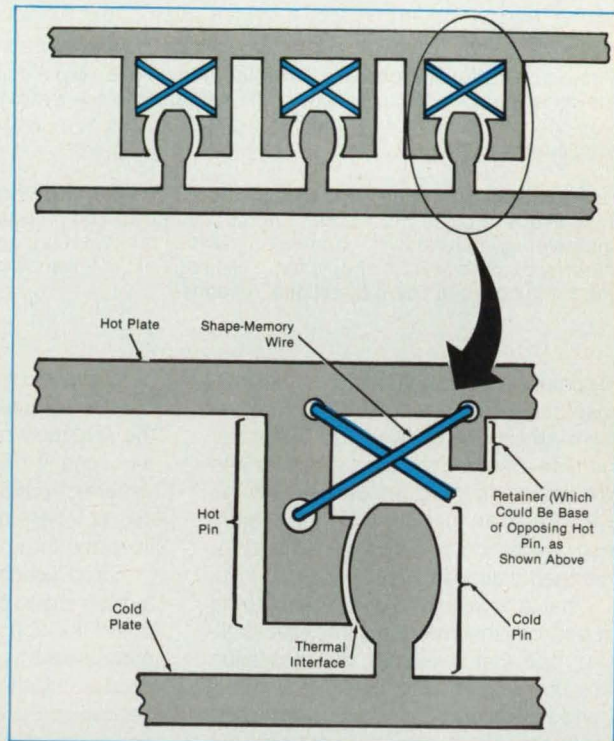

hot pin against the cold pin. When the temperature falls below the critical level, the wire expands to its original length, allowing the hot pin to pull away from the cold pin. The critical temperature is determined by the composition of the alloy.

Thus, when heat flowing into the hot plate (from electronic circuitry, for example) raises the temperature of the hot plate above the critical temperature, the hot and cold pins come into contact and heat then flows into the cold plate, which may be connected to a radiator, heat exchanger, or conductor. The hot pins are held firmly against the cold pins until the temperature of the hot plate drops sufficiently to relax

the wire. Then the pins separate and the transfer of heat stops. When the temperature of the hot plate again rises, the cycle resumes.

This work was done by M. Bruce Milam of Goddard Space Flight Center. For further information, Circle 39 on the TSP Request Card.

This invention is owned by NASA, and a patent application has been filed. Inquiries concerning nonexclusive or exclusive license for its commercial development should be addressed to the Patent Counsel, Goddard Space Flight Center [see page 20]. Refer to GSC-13251.

Measuring Streamwise Momentum and Cross-Stream Turbulence

Probes can be shaped to obtain the desired directional responses.

Ames Research Center, Moffett Field, California

New shapes for the tips of Pitot probes have been proposed to enable measurement of time-averaged streamwise momentum densities and time-averaged intensities of cross-stream turbulence in subsonic flows. Pitot probes are tubular pressure probes designed to face upstream, across

the stream, or at intermediate angles; the response of such a probe depends on the direction of flow with respect to its axis. The new shapes would be tailored to yield specific directional responses.

Figure 1 illustrates schematically a probe in a turbulent flow. The probe is axisym-

metric, and its x axis is aligned with the time-averaged direction of the stream. The flow is assumed to be in the low-subsonic range, so that the effect of compressibility can be neglected. It is also assumed that viscosity, if present, exerts a negligible effect. Under these conditions, a relatively simple analysis based on the fundamental equations of flow shows that the component of dynamic pressure attributable to cross-stream turbulence equals the difference between the time-averaged stagnation pressure based on the streamwise


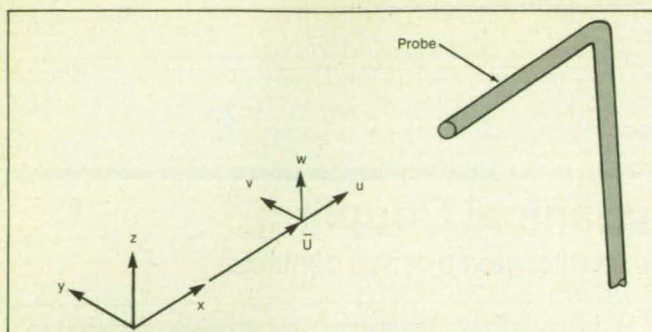


Figure 1. A **Tubular Probe in a Turbulent Flow Field** responds to the static and dynamic pressures. The response to the dynamic pressure can depend in a complicated way on the x, y, and z components of velocity.

Figure 2. **Two Stagnation-Pressure Probes Plus a Static-Pressure Probe** provide the measurements needed to compute the time-averaged streamwise momentum density and time-average intensity of cross-stream turbulence. The shape of the lower probe gives it the desired $\cos^2\alpha$ directional response.

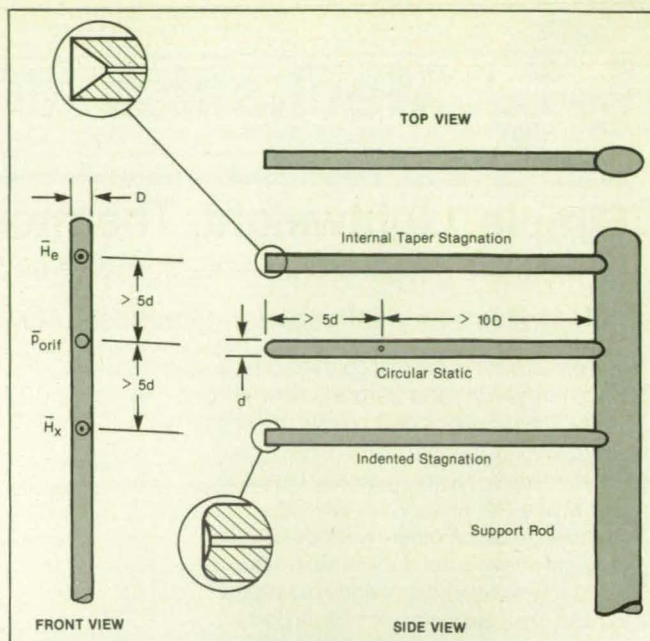

(x) component of velocity and the time-averaged stagnation pressure based on the entire velocity. The analysis also shows that the time-averaged dynamic pressure and streamwise momentum density can be calculated from the time-averaged streamwise stagnation pressure and the time-averaged static pressure.

What is required, then, is a set of three probes: one that measures the static pressure; one that measures the stagnation pressure and is equally sensitive to the x, y, and z components of flow velocity; and one that measures stagnation pressure but

is sensitive to the x component of velocity only (see Figure 2). The requirement upon the third-mentioned probe is equivalent to the requirement that its response to dynamic pressure be proportional to $\cos^2\alpha$, where α is the angle between the flow and the axis of the probe.

The directional response of a probe of a given shape can be calculated from potential-flow theory by use of suitable computer programs. Such calculations can be iterated until the response approaches the desired $\cos^2\alpha$ response to an acceptable degree of precision. There is no unique so-

lution; one might wish to investigate several shapes to determine which is the least sensitive to errors in construction.

This work was done by Vernon J. Rossow of **Ames Research Center**. For further information, Circle 58 on the TSP Request Card.

This invention is owned by NASA, and a patent application has been filed. Inquiries concerning nonexclusive or exclusive license for its commercial development should be addressed to the Patent Counsel, Ames Research Center [see page 20]. Refer to ARC-11934.

Improved Depiction of Computed Unsteady Flows

Animated pictures of flow variables and smoke and dye streaks assist in analyses and comparisons.

Ames Research Center, Moffett Field, California

The PLOT4D and STREAKER computer programs increase the ease of production and utility of animated depictions of unsteady flows that have been simulated numerically by advanced techniques of computational fluid dynamics. Given the practical limitations of computer memories, these programs were developed with a view toward maximizing the amount of information displayed while minimizing the amount stored. By enabling the user to make (and, if necessary, change) choices from a variety of options, these programs enhance the visualization and analysis of computed flows.

PLOT4D is an extended version of PLOT3D, which has been used widely to depict steady three-dimensional flows. (The "4" distinguishes PLOT4D by emphasizing that time is treated as a fourth dimension.) PLOT4D retains the capabilities and ease of use of PLOT3D, but incorporates additional features that make it more computationally efficient to use PLOT4D than to visualize an unsteady flow as a succes-

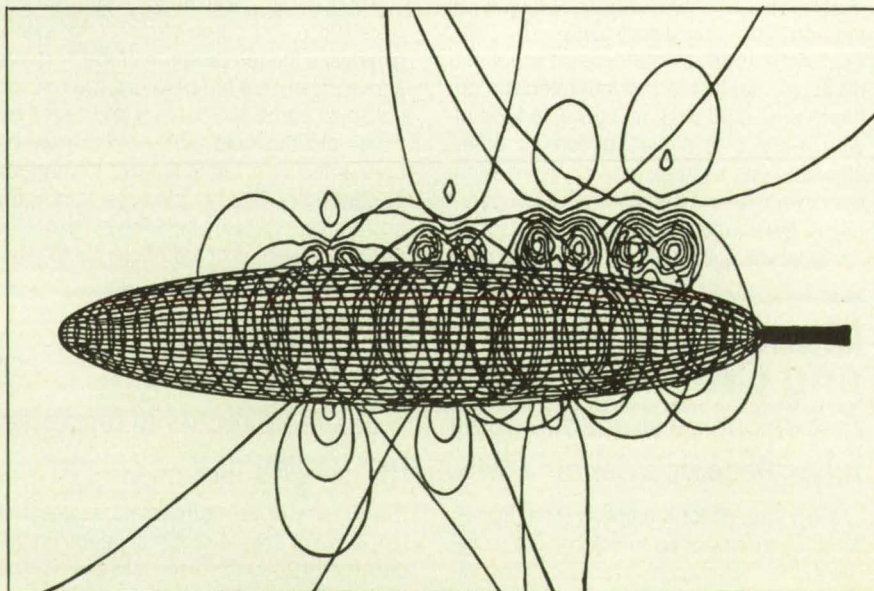


Figure 1. These **Density Contours** around a prolate spheroid in a flow at an angle of attack of 30° were plotted by PLOT4D. This picture represents a steady flow, for example only; PLOT4D is designed primarily for but not limited to the depiction of unsteady flow.

sion of steady flows, animating frame by frame via PLOT3D.


PLOT4D postprocesses the numerical output of a fluid-dynamical computation into maps of flow quantities on two-coordinate surfaces that depict a cut through the flow field or conform to a body surface. Also, multiple surfaces can be animated; in the extreme case, a full three-dimensional grid can be represented as a stack of two-coordinate surfaces.

The animation capabilities of PLOT4D require only a one-time input of a given three-dimensional flow configuration in the form of sets of three-coordinate data. These data consist of the flow variables in two-coordinate computational planes with time as the third coordinate. From five basic flow variables (density, the three components of momentum, and internal energy), PLOT4D calculates any of the 57 available scalar or vector quantities at each time step. The requested graphical representation is then stored in a memory buffer that enables the subsequent sequential display of the images on a video monitor. In this manner, all of the images are created before the animation is displayed. With a few quick commands in PLOT4D, various contours that depict the flow (see Figure 1) can be shown in sequence. The animation can be run forward, backward, slowly, or quickly; stopped; and restarted.


The STREAKER program generates streaklines, which are close approximations of the patterns that would be traced out by streams of dye or smoke released into the simulated flows at designated positions. Streaklines can be compared directly with smoke and dye traces in flow experiments to obtain qualitative indications of the validity of fluid-dynamical computations rapidly. It is important to distinguish among streaklines, streamlines, and the pathlines of individual particles. While they are identical in steady flow, they differ in unsteady flow (see Figure 2). Thus, the streamline-tracing subroutines of prior flow-visualization programs cannot be used to simulate smoke and dye traces in unsteady flow.

A streakline can be defined via the spatial succession of endpoints, at the given time step, of pathlines of massless particles released into the flow at some position at previous time steps. STREAKER computes the endpoints of such pathlines by fourth-order Runge-Kutta integration of velocity vectors. The streamlines will be broken if the distance between consecutive points exceeds a user-defined value.


This work was done by Merritt H. Smith, William R. Van Dalsem, and Pieter G. Buning of Ames Research Center and F. Carroll Dougherty of the University of Colorado. Further information may be found in AIAA paper 89A-25122, "Analysis and Visualiza-

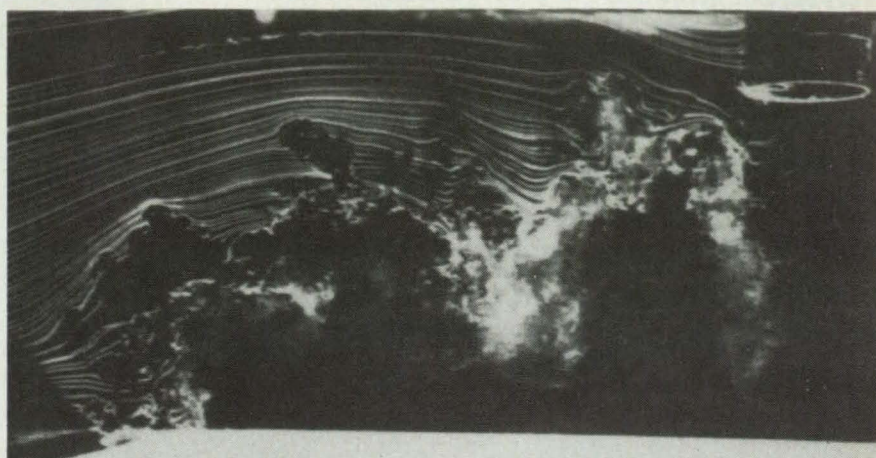

EXPERIMENT WITH SMOKE TRACES

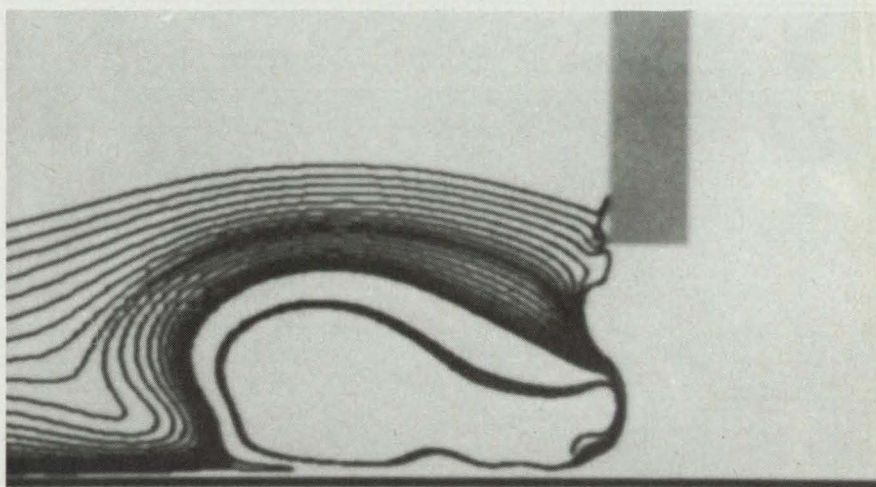

COMPUTED STREAMLINES

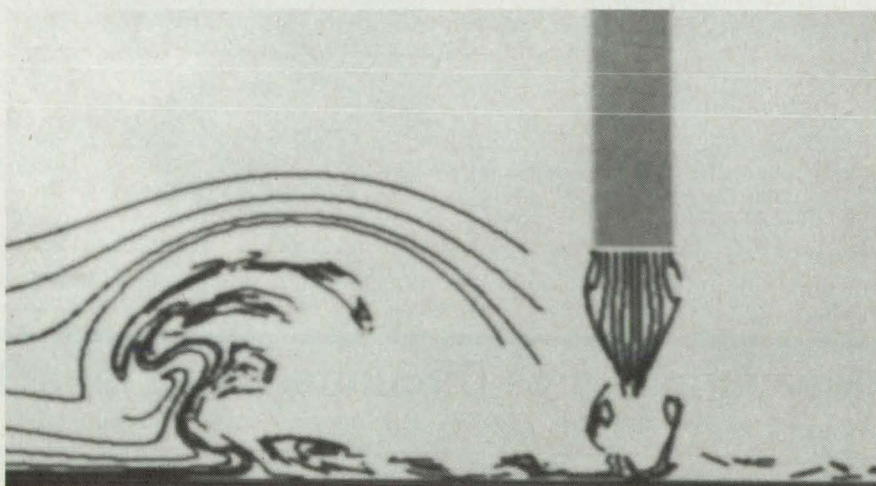

COMPUTED STREAKLINES

Figure 2. A Jet Aimed at the Ground With a Crossflow was photographed in an experiment with smoke tracers. It was also simulated numerically and is depicted here with streamlines and streaklines. The streaklines clearly resemble the smoke traces more closely than the streamlines do.

tion of Complex Unsteady Three-Dimensional Flows."

Copies may be purchased [prepayment required] from AIAA Technical Information

Service Library, 555 West 57th Street, New York, New York 10019, Telephone No. (212) 247-6500. ARC-12677

Tangential-Entry Injector With Internal Reed Valve

The pressure drop as a function of flow can be changed by design.

Marshall Space Flight Center, Alabama

A liquid-spray-injecting device provides a designed pressure drop versus rate of flow to help in metering the flow. The device can be used, for example, to provide a wide range of throttleability for liquid fuel injected into a combustion chamber or engine.

The device includes a cylinder with tangential entry slots and an internal reed valve (see Figure 1). The tangential entry imparts a swirling motion to the liquid, resulting in a finely atomized liquid spray when the liquid reaches the discharge end of the injector. The reeds in the reed valve

vary the cross-sectional flow areas of the tangential entry slots by deflecting in response to the pressure of the flowing liquid. This variation alters the pressure-versus-flow characteristic.

The reed valve is a thin sheet of metal with partial cutouts, rolled up into a cylinder. The partial cutouts define the reeds. Windows at the ends of the reeds provide fixed minimum cross sections for flow. In fabrication, the reed valve is inserted in the cylinder that has the tangential entry slots, and a cover is brazed onto one end of the

cylinder.

At low pressure drop, the reeds remain undeflected, so that the windows predominate as the flow-metering cross sections. When the pressure exceeds a specified first design value, the reeds deflect, providing varying flow-metering cross sections. When the pressure drop reaches a second, higher design value, the reeds attain maximum deflection, and any further increase in pressure drop fails to cause further deflection because the metering cross section shifts from the reeds to the tangential entry slots.

Figure 2 shows the pressure-vs.-flow characteristics of this device and of a comparable device of fixed cross section. The pressure drop varies with the square of the flow below the first and above the second design value, and linearly with the flow between these two design values.

This work was done by George B. Cox, Jr., of Pratt & Whitney for Marshall Space Flight Center. For further information, Circle 112 on the TSP Request Card.

Inquiries concerning rights for the commercial use of this invention should be addressed to the Patent Counsel, Marshall Space Flight Center [see page 20]. Refer to MFS-28547.

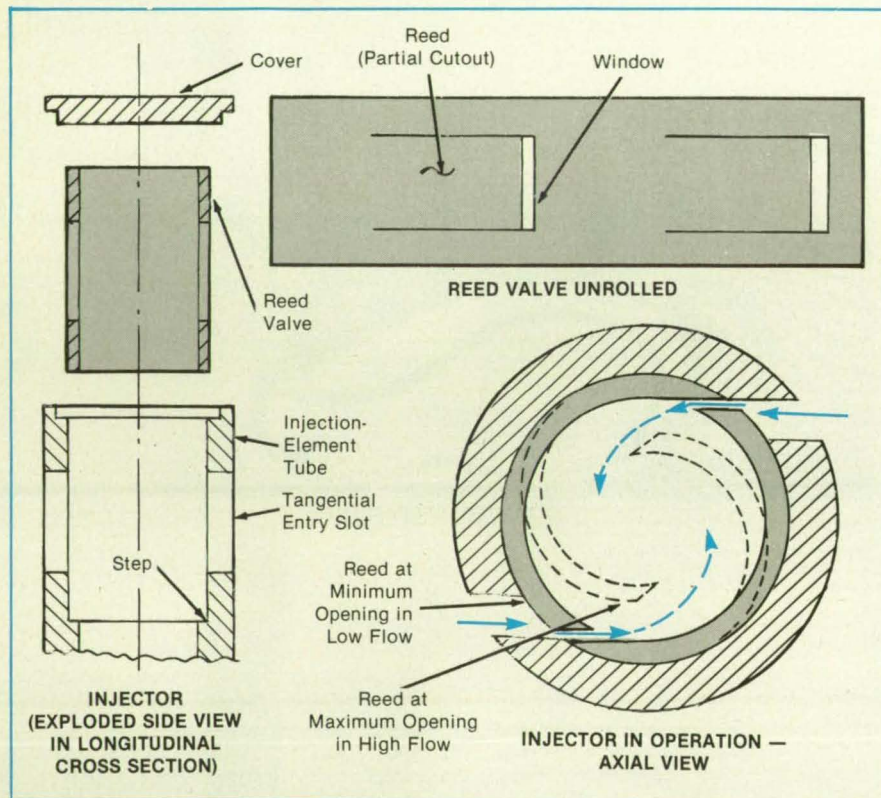


Figure 1. A Reed Valve is placed inside a tangential-entry flow injector to provide a variable orifice.

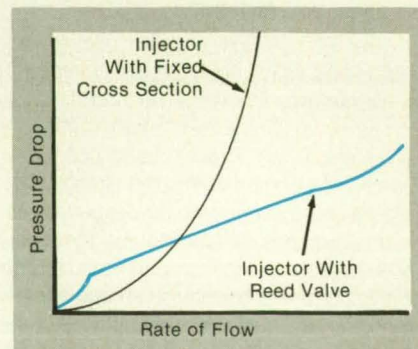


Figure 2. The Pressure-vs.-Flow Characteristic of the device of Figure 1 can be chosen by design to provide a wide range of throttleability.

Measuring Large Circumferences More Precisely

Potentially attainable precision exceeds that of a measuring tape or micrometer.

Marshall Space Flight Center, Alabama


An optoelectromechanical gauge measures the circumference of a large object with a resolution of about 10^{-4} in. (about $2.5 \mu\text{m}$). It was designed to measure circumferences of large solid-rocket-motor cases precisely but can just as well be used to measure circumferences of other large, round objects like tanks. It could also measure the distance between two marks on the edge of a plate or along a beam or track.

The figure illustrates the gauge mounted on the upper rim of a large, vertically oriented round cylinder. The gauge frame rests on the rim or on optional edge rollers that, in turn, rest on the rim. A measuring wheel is held by a constant-force spring device against the cylindrical surface, the circumference of which is to be measured. Two inside rollers and two outside rollers provide rolling contact with the cylinder and help to guide it around the rim. The

inside, outside, and edge rollers are mounted in fixed positions on the frame.

A disk like those used in compact-disk recording marked in an angular-position-indicating code is mounted on the side of the measuring wheel. A laser reader mounted on the frame senses the passage of the marks as the disk rolls along the surface. The reader sends the code signals to a microprocessor, which counts each mark, records the direction of rota-

The Laser Reader Detects Code Marks on the side of the measuring wheel. The passage of the marks indicates the distance traveled by the wheel as it moves around the circumference of the cylinder. The principle can be used to measure the inside as well as the outside circumference.

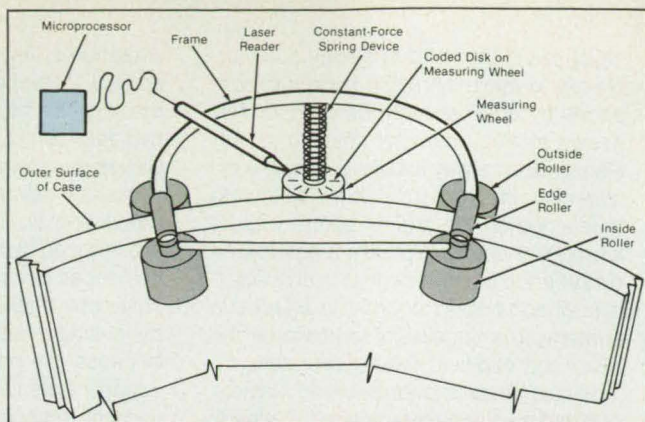

tion, and computes the distance traveled. The distance is displayed electronically and/or printed on paper.

This work was done by Louis E. Moore and Ernest E. Rogers of Thiokol Corp. for Marshall Space Flight Center. No fur-

ther documentation is available.

Inquiries concerning rights for the commercial use of this invention should be addressed to the Patent Counsel, Marshall Space Flight Center [see page 20]. Refer to MFS-28564.

Books and Reports

These reports, studies, handbooks are available from NASA as Technical Support Packages (TSP's) when a Request Card number is cited; otherwise they are available from the National Technical Information Service.

Studies of Positive-Position-Feedback Control

Damping of vibrations was increased substantially in experiments.

A report discusses theoretical and experimental studies of positive-position-feedback control, a technique intended primarily for use in suppressing vibrations in large flexible structures. Positive-position-feedback control involves the placement of actuators and position or strain sensors (e.g., piezoelectric transducers), possibly collocated in pairs, at a number of points on a structure; control voltages are applied to the actuators in response to the outputs of the sensors processed via a compensator algorithm. The compensator algorithm implements second-order differential filter equations of the same form as those that describe the vibrations of the structure. The coupling between the structure and compensator is called "positive position feedback" because the forcing terms in the differential equations for the vibration-mode position coordinates of the structure and filter, respectively, are proportional to the vibration-mode position coordinates of the filter and structure, respectively.

One of the advantages of positive position feedback is that it provides global stability conditions that are independent of the dynamical characteristics of the structure; that is, vibrational modes that are not controlled or not represented in the mathematical model of the structure do not

destabilize the system. Furthermore, positive-position-feedback control is not destabilized by the finite dynamics of the actuators.

This study focused on an aluminum cantilever beam 12.5 in. (31.8 cm) long, 0.648 in. (1.65 cm) wide, and 9.5 mils (0.24 mm) thick, equipped with two actuator/sensor pairs near its clamped end. Vibrations were excited by shaking the clamped end. Equations for the dynamics of the beam were derived, and the corresponding filter parameters were extracted. Several experiments were performed: In one experiment, one sensor/actuator pair was used, and one filter was tuned to control the first bending mode at about 5 Hz. In another experiment, one sensor/actuator pair was used, and three filters were used to control the first three modes. In yet another experiment, one actuator/sensor pair and one filter were used to control the first, second, and third bending modes, while the other sensor/actuator pair and another filter were used to control the fourth, fifth, and sixth bending modes.

The results of the experiments demonstrate that it is feasible to suppress vibrations by use of positive position feedback and that the spillover of vibrational energy into uncontrolled modes can have a stabilizing effect if the control gain is sufficiently small. The experimental positive-position-feedback control of the cantilever beam was found to multiply its damping ratios in various bending modes by factors that ranged from 2 to 130.

This work was done by James L. Fanson and Thomas K. Caughey of Caltech for NASA's Jet Propulsion Laboratory. To obtain a copy of the report, "Positive Position Feedback Control for Large Space Structures," Circle 76 on the TSP Request Card. NPO-18074

100 MHz PC BASED DATA ACQUISITION



- Up to 100 MHz Real Time Sampling Rate
- Down to 10 nanoseconds per sample
- 50 MHz, 2 channel simultaneous sampling
- Multiple Cards for more channels
- 8 bit Resolution
- Software programmable input gain
- Free Oscilloscope software. 2048 point FFT
- Source code drivers in C, Pascal and BASIC
- Memory Depths up to 8 Megabytes
- Supported by GageScope software
- GagePC Industrial Computers available
- Products already in use at NASA AMES

CompuScope LITE, 40 MHz / 16 KB	\$595
CompuScope 220, 40 MHz / 256 KB	\$1,995
CompuScope 250L, 100 MHz (low cost)	\$2,750
CompuScope 250 - 32K, 100 MHz / 32KB	\$3,500
CompuScope 250 - 128K, 100 MHz / 128 KB	\$3,900

Enquire about our Arbitrary Waveform Generator Cards

Call (514) 337-6893
Gage Applied Sciences Inc.

5465 Vanden Abeele, Montreal PQ, Canada H4S 1S1.

Fax (514) 337-8411


For More Information Circle No. 306

VERSATILE!

UniSlide® Positioners

Stackable • 2" to 90" long • 1" to 9" wide

Choose length and width you want

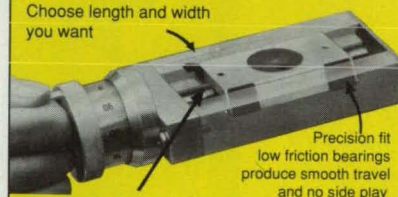

Precision fit low friction bearings produce smooth travel and no side play

7 screw pitches—English and Metric, in standard or high precision grade

New Catalog G has over 960 UniSlide Assemblies including Rotary Tables, Plain, Rapid Advance and Micrometer Models. Call for your free catalog:

800-642-6446 (in NYS 716-657-6151)

VELMEX, INC. FAX: 716-657-6153
E. Bloomfield, NY 14443

For More Information Circle No. 396

Are you reading someone else's copy?

Get your own copy by filling in the qualification form bound into this issue.

CFD Simulations of Sonic Booms in Near and Mid Fields

Experiments confirm the accuracy of simulations.

A report discusses the use of computational fluid dynamics (CFD) to simulate numerically the generation and propagation of sonic booms in the near- and mid-field regions of supersonic flows about simplified bodies representative of advanced airplanes. The principal motivation for this

study lies in the need to design such airplanes to minimize sonic booms experienced by observers on the ground. The design strategy calls for shaping an airplane in such a way that the mid-field pressure disturbance (e.g., a finite-rise shock) is retained on the ground before it turns into an N-shaped overpressure-versus-time disturbance of the type that is characteristic of noisy sonic booms. To effect this strategy, it is necessary to compute the near- and mid-field flows accurately.

In this study, the parabolized Navier-Stokes equations were applied to steady

supersonic flows about a cone/cylinder body, a low-aspect-ratio wing, and a thin fuselage-like body with a sharp nose and two delta wings. The parabolized Navier-Stokes equations in these cases offer two important advantages: (1) The required computing time and computer memory are reduced below what would otherwise be needed because the equations can be solved by a space-marching rather than by a time-relaxation technique, and (2) because the parabolized Navier-Stokes equations are valid in both the viscous and inviscid regions of the flow field, the interactions between these regions are taken into account automatically.

Two limitations arise from "parabolization" of the full Navier-Stokes equations. The first is that the streamwise viscous terms are neglected. The second is that the streamwise component of velocity must be positive everywhere: this excludes streamwise separation of flow but still permits crossflow separation.

The parabolized Navier-Stokes equations were integrated by use of an implicit, approximate-factorization, finite-volume algorithm in which the crossflow inviscid fluxes were evaluated by Roe's flux-difference-splitting scheme. First, the near-field solutions were obtained by applying the algorithm to the flows immediately surrounding the bodies. These solutions were transferred to computer codes based on Whitham's *F*-function theory (in which *F* is an integral that represents a distribution of sources that causes a given isentropic axisymmetric flow at a given distance from the airplane) for extrapolation to the far field.

These computations were performed on grids of various degrees of fineness and compared with data from wind-tunnel experiments performed with the three bodies in question. It was observed that a large number of grid points was needed to resolve the interactions between the tail shocks and the fan expansions, and that adequate resolution of these two regions of the flows near the bodies was necessary for accurate representations of the far-field overpressures. Consequently, thereafter a solution-adaptive-grid procedure was used and found to produce accurate solutions with half as many grid points.

This work was done by Samson H. Cheung of MCAT Institute and Thomas A. Edwards and Scott L. Lawrence of Ames Research Center. Further information may be found in AIAA paper 91A-12512, "Application of CFD to Sonic Boom Near- and Mid-Field Prediction."

Copies may be purchased [prepayment required] from AIAA Technical Information Service Library, 555 West 57th Street, New York, New York 10019, Telephone No. (212) 247-6500.

ARC-12855

COSMOS/M

Automatic 3D Meshing ... it's easy!

**COSMOS/M FEA is fast,
reliable and affordable**


Meshing is perhaps the most time consuming aspect of analyzing your 3D models - sometimes, more than 50% of your time is dedicated to obtaining a mesh that provides accurate results.

TIME SAVINGS!

Now ... with COSMOS/M's new easy to use 3D automatic meshing capability ... you can realize significant time savings in just meshing alone. Automatic 3D meshing makes the modeling of complex structural, thermal, fluid and electro-magnetic analysis a cinch.

IT IS REALLY SIMPLE TO USE!

With 3D automatic meshing, you can significantly shorten your analysis time. Let COSMOS/M do the work for you. What can be simpler than that? Just imagine what you

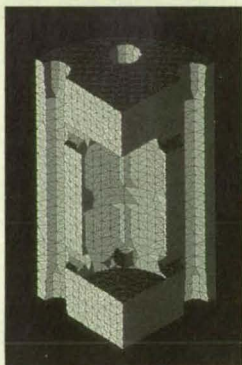

3D solid mesh

can do with all the extra time on your hands. Less wait. More reliable results.

The combination of COSMOS/M and your PC or workstation makes FEA fast, easy, reliable ... and affordable. Call us!

**FEA programs
available
from
\$1550**

ANALYSIS:

- ☐ STATICS
Linear/Nonlinear
- ☐ DYNAMICS
Linear/Nonlinear
- ☐ HEAT TRANSFER
Linear/Nonlinear
- ☐ FLUID FLOW
Laminar, Turbulent
- ☐ ELECTROMAGNETICS
- ☐ FATIGUE
- ☐ CRASH DYNAMICS
- ☐ BUCKLING
- ☐ DESIGN
OPTIMIZATION
- ☐ SHELL & SOLID OF
REVOLUTION

**RUN YOUR
OWN DESIGN
PROBLEMS ...
CALL NOW
FOR A FREE 50
NODE VERSION
OF COSMOS/M
(310) 452-2158**

1661 Lincoln Blvd
Suite 200
Santa Monica
CA, USA, 90404
tel.(310)452-2158
fax.(310)399-6421



For More Information Circle No. 446



Bearing Cartridge Designed To Reduce Wear

Independent preloads would be applied to two races.

Marshall Space Flight Center, Alabama

A bearing cartridge that holds the outer races of two ball bearings in a turbopump is designed to prevent unloading of the bearings during operating transients. The cartridge and bearings are intended to replace two ball bearings, the outer races of which are mounted in a cylinder called the "isolator" and which are preloaded by a single spring mount that holds the isolator and reacts radial loads.

The figure shows the old and the proposed new designs. In the old design, the bearings can become unloaded when the pair of bearings slides axially in the bore of the isolator during axial transients of the shaft and inner races mounted on the shaft. The moment applied to an outer race as it moves along the isolator may cause unloading or excessive excursion of the balls on the side opposite that of the loaded balls. It is necessary to eliminate unloading because unloading has been found to initiate wear.


In the new design, the outer races would be mounted in a cartridge that would slide axially in the bore of the isolator during transients and that would force the outer races to move with it as a pair. The cartridge would include two integral seal-type spring members that would apply independent preloads to the two outer races. The outer surface of the cartridge would be barreled slightly to allow the bearings to be loaded nearly evenly in the presence of misalignment between the shaft and the components that support the bearings.

The spring members in the cartridge would be able to undergo twice as much deflection as does a beam spring in the old design, without requiring additional space. At a sufficiently large deflection, the point of contact between the affected spring and outer race would move from the spring pad to a point on the member closer to the bore of the cartridge, thereby effectively shortening the spring and mak-

ing it stiffer so that it would offer a greater impediment to further travel. In other words, the affected bearing would "bottom" in the cartridge before the other one would become unloaded.

Another advantage of independent preloads on the two bearings is that deflections of one bearing would not affect the other bearing directly. In comparison, bearings preloaded against each other impose unwanted moments on each other, resulting in misalignment. Another advantage of independent preloads is that the influences of differences between the internal clearances in the two bearings (caused by differences between temperatures) and of differences between the radial loads on the two bearings would be eliminated.

This work was done by Eric J. Krieg of Rockwell International Corp. for Marshall Space Flight Center. For further information, Circle 52 on the TSP Request Card. MFS-29807

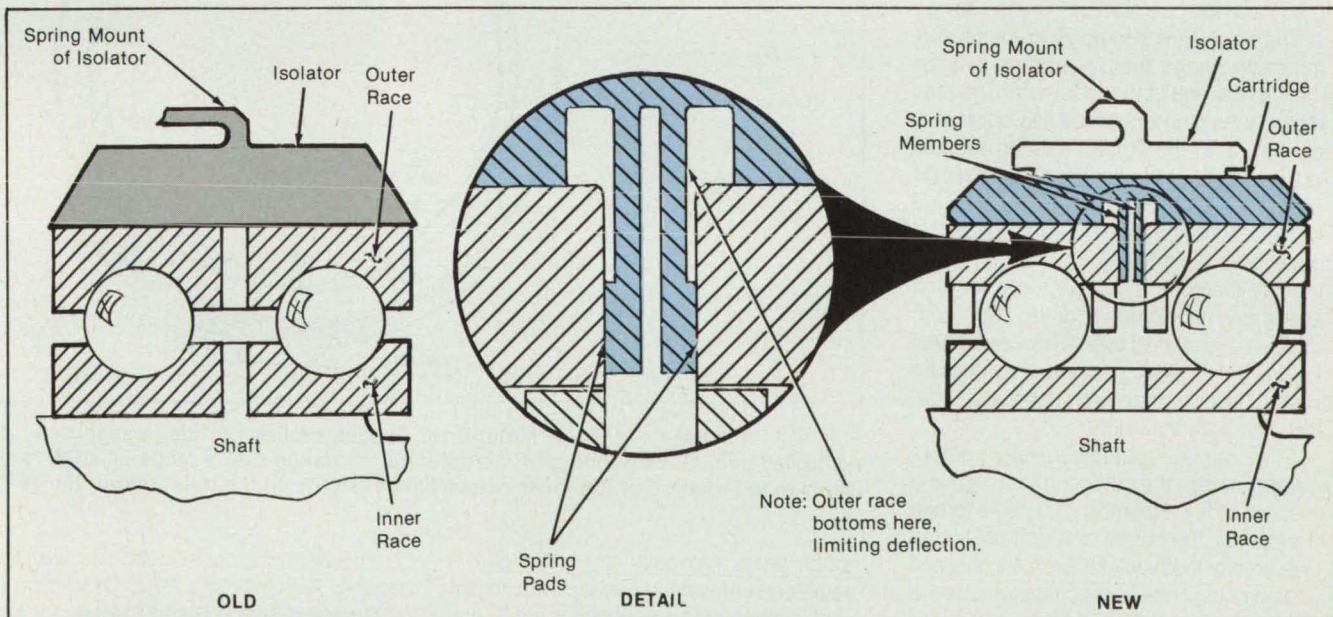

In the **Old Design**, the bearings can become unloaded during axial transients of the shaft and inner races. In the new design, one bearing would "bottom" in the cartridge before the other would become unloaded.

Dual-Roll Robotic Wrist-Joint Assembly

The joint provides two concentric rotations: one limited, the other unlimited.

Goddard Space Flight Center, Greenbelt, Maryland

A compact robotic wrist-joint assembly (see Figure 1) includes two motor subas-

semblies (see Figure 2) that provide two concentric output rotations about the axis

of the wrist:

1. An outer output flange on the front face

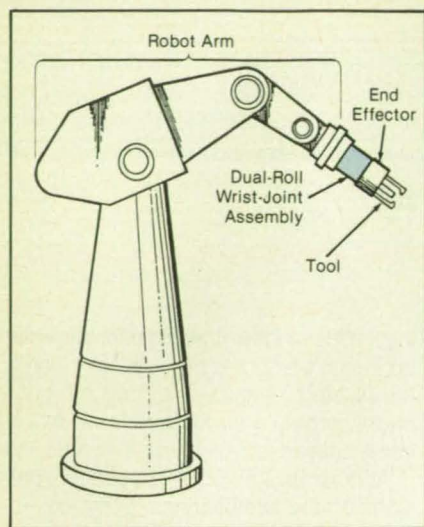


Figure 1. The Dual-Roll Wrist-Joint Assembly is mounted on the end of a robot arm.

of the wrist-joint assembly is rotated to, and held at, any predetermined roll angle within a limited range of $\pm 180^\circ$. This motion provides the required roll orientation to the end effector of the robot, which is mounted on the outer flange.

2. An inner output flange concentric with the outer output flange is capable of unlimited rotation relative to the outer flange. This motion is used to drive a rotary tool (e.g., a milling cutter or a nut runner like the one shown in Figure 1) in conjunction with the operation of the end effector.

The wrist-joint assembly includes a rear mounting flange that is used for attachment to the end of the robot arm. The rear motor subassembly drives the outer output flange in the limited rotation relative to the rear mounting flange; the front motor subassembly drives the inner output flange in the unlimited rotation relative to the outer output flange. Each motor subassembly includes a concentric rotor and stator and a harmonic drive. Harmonic drives are preferred over other gear drives for this mechanism because they operate without backlash and are compact, reliable, and light in weight.

The train of torque-coupling components between the outer output flange and the rear motor assembly includes a torque transducer, the output of which could provide control feedback for such applications as tightening bolts to specified torques. An angle resolver at the output of the rear motor subassembly provides feedback for control of the roll angle of the outer flange. A flat, flexible cable provides the electrical connections between the stationary housing and the front motor, which rotates with the outer flange. The cable is wound in a spiral that provides enough slack to accommodate the $\pm 180^\circ$ range of rotation of the outer output flange.

A brake disk is connected to the rear

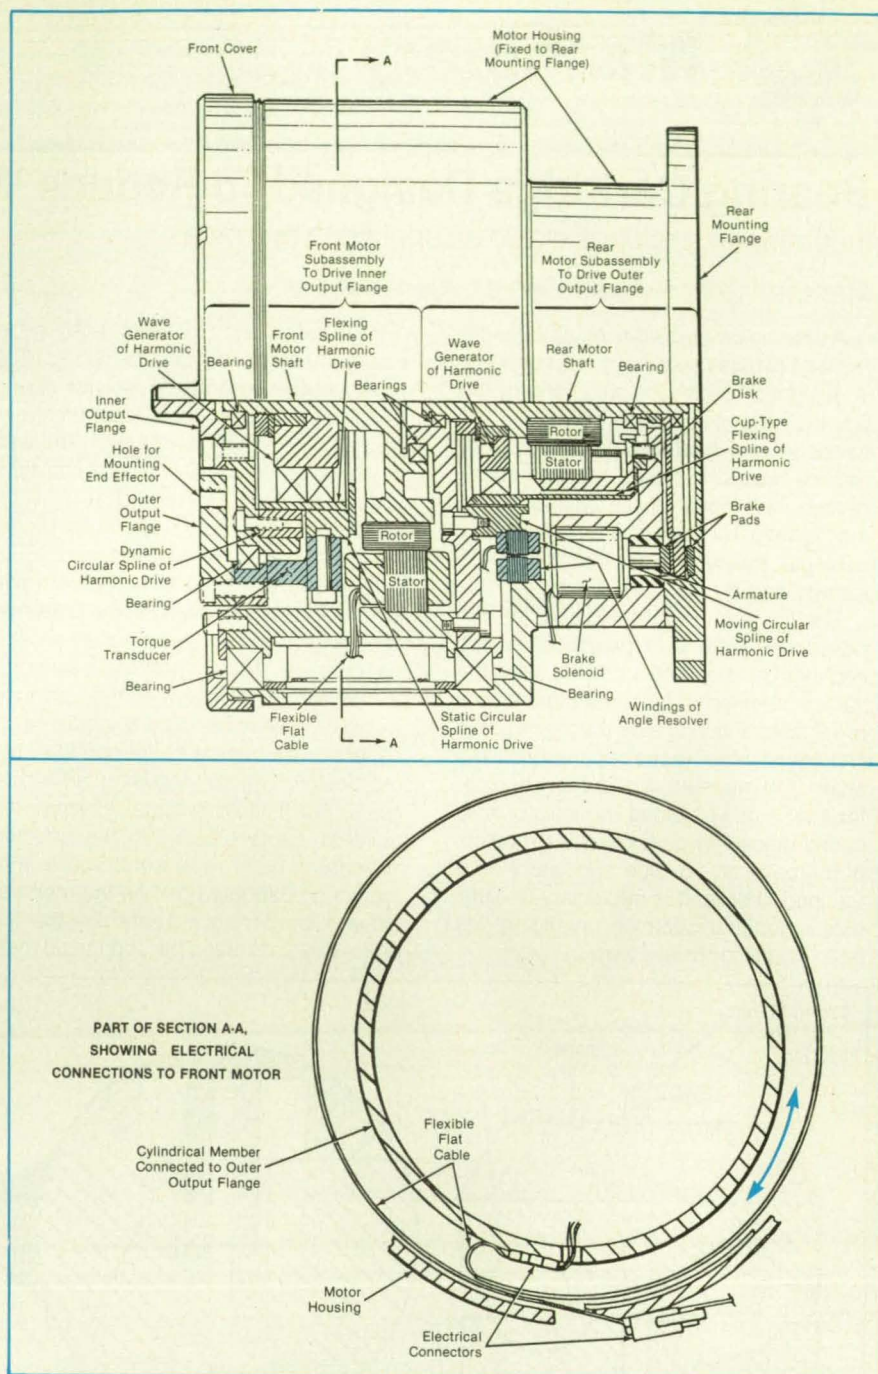


Figure 2. The Rear and Front Motor-Drive Subassemblies provide, respectively, (1) controlled angular positioning of the outer output flange over a range of $\pm 180^\circ$ and (2) unlimited rotation of the inner output flange relative to the outer output flange.

motor shaft. Normally, the brake disk is squeezed between two brake pads to prevent rotation of the rear motor shaft, harmonic drive, and outer output flange. To free the rear motor subassembly for rotation to a new commanded roll angle, a brake solenoid is energized to pull on an armature that, in turn, pulls one of the brake pads away from the brake disk. Once the outer output flange reaches the new commanded roll angle, as sensed by the angle resolver, the solenoid is deenergized and the brake applied.

This work was done by John M. Vranish, Paul W. Richards, and Peter D. Spidaliere of Goddard Space Flight Center. For further information, Circle 4 on the TSP Request Card.

This invention is owned by NASA, and a patent application has been filed. Inquiries concerning nonexclusive or exclusive license for its commercial development should be addressed to the Patent Counsel, Goddard Space Flight Center [see page 20]. Refer to GSC-13307.

Improved Regenerative Sorbent-Compressor Refrigerator

The efficiency of the regenerative portion of the cooling cycle would be increased.

NASA's Jet Propulsion Laboratory, Pasadena, California


A conceptual regenerative sorbent-compressor refrigerator would attain a regeneration efficiency and, therefore, an overall power efficiency and coefficient of performance greater than those of many conventional refrigerators.

The improved refrigerator could be powered by electricity, oil, gas, solar heat, or even waste heat. The concept has been partly verified by computer simulation, and tests have been started. Refrigeration systems designed according to this concept could be used as air conditioners, refrigerators, and heat pumps in industrial, home, and automotive applications.

The refrigerator would include two fluid loops. In one loop, a non-ozone damaging working fluid, CH_2FCF_3 (also known as Refrigerant 134a or R134a), would be circulated by physical adsorption and desorption in four activated-charcoal sorption compressors. In the other loop, a liquid or gas coolant (e.g., oil) would be circulated by a pump. The coolant loop would be used to pass hot and cold wavefronts through

the sorption compressors, thus regenerating almost all of their sensible heat and about half of their heats of adsorption. This system has very little thermal gradient in the heated and cooled compressors, and thus is more efficient than previous regenerative sorption system.

The figure illustrates schematically the operation at one of four phases of the operating cycle. (The phases propagate in sequence among the four sorption compressors)

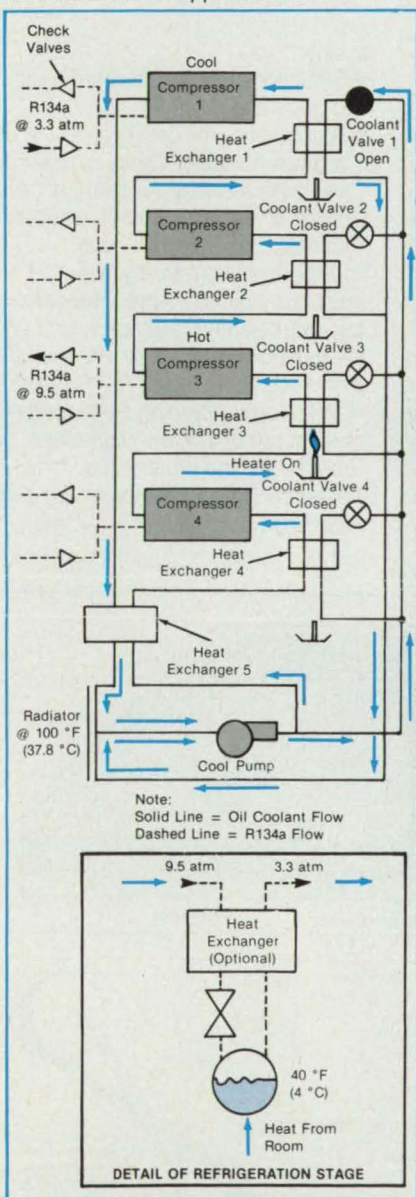

A Wave of Regenerative Heating and Cooling would propagate cyclically like a peristaltic wave among the four sorption compressors and their associated heat exchangers.

AMCOBILITY sends a different kind of signal.


Let's talk about all those things you have to rack, stack, patch, monitor, and maintain. You need 'em neat and secure, easy to get at, and easy on the eyes.

That's where Amco comes in. We've been building enclosures for the world's toughest applications for nearly a half-century. Our customers know us as fanatics on quality and service.

We haven't forgotten the esthetics. Amco's selection of colors, trim, and styling options, fits in anywhere, with a look that's as crisp and clean as your signal.

All cabinets are shipped pre-assembled in single or multi-bay configurations.

AMCOBILITY is easy to tune in. Call for our Monitoring Systems Literature.

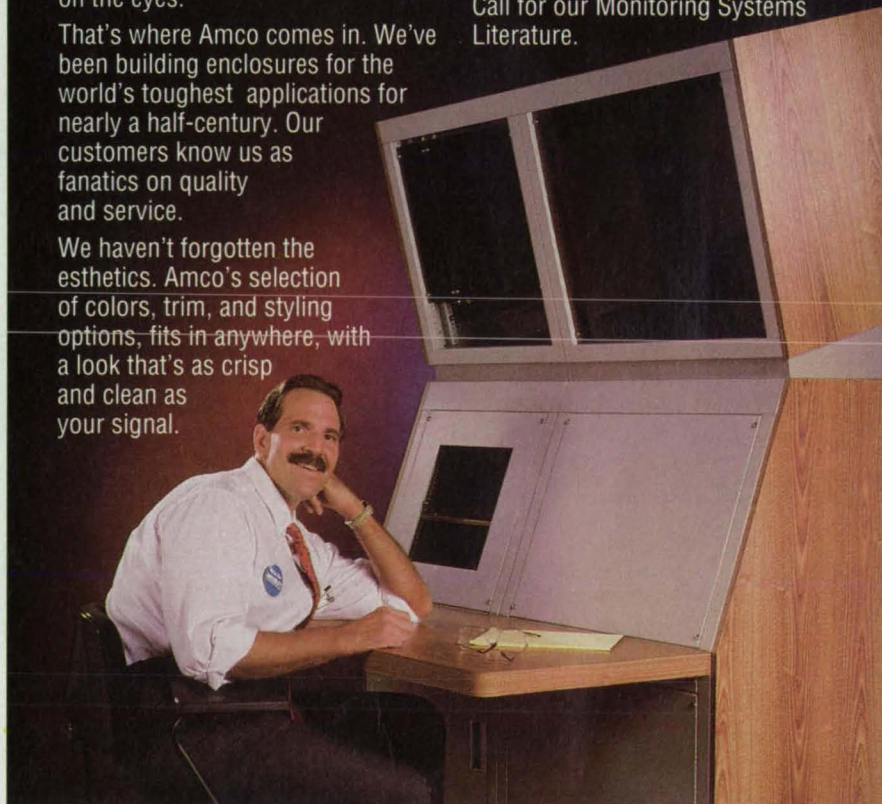

AMCO Engineering Co.

3801 North Rose Street
Schiller Park, IL 60176-2190
Illinois: 708-671-6670
FAX: 708-671-9469

Call Toll Free: 1-800-833-3156

For More Information Circle No. 500

sors.) In this phase, the heater under heat exchanger 4 would be turned on to heat compressor 3 to a temperature of about 400 °F (204 °C) while coolant valve 1 would be opened to cool compressor 1 to about 100 °F (38 °C).

The heating in compressor 3 would cause the working fluid to be desorbed at a pressure of about 9.5 atm (0.96 MPa), while the cooling in compressor 1 would cause the working fluid to be resorbed down to a pressure of about 3.3 atm (0.33 MPa). Thus, the working fluid would flow from compressor 3 through an expansion valve where the fluid is cooled and accepts heat from a room (air conditioning), and

finally to compressor 1.

Based on actual adsorption data, the cooling coefficient of performance is estimated to be about 1.5, which is about half the efficiency of an electrical vapor-compression cycle. Gas heat, however, costs 4 times less than electrical power, primarily because power-generation cycles are so inefficient. Thus, this improved refrigeration system should cost about half as much to operate as traditional refrigeration systems do, and, including power generating costs, it should consume noticeably less energy.

This work was done by Jack A. Jones of Caltech for NASA's Jet Propulsion

Laboratory. For further information, Circle 128 on the TSP Request Card.

In accordance with Public Law 96-517, the contractor has elected to retain title to this invention. Inquiries concerning rights for its commercial use should be addressed to

Edward Ansell
Director of Patents and Licensing
Mail Stop 305-6
California Institute of Technology
1201 East California Boulevard
Pasadena, CA 91125

Refer to NPO-18211, volume and number of this NASA Tech Briefs issue, and the page number.

Helicopter Rotor Blade With Free Tip

Vibrations are reduced while efficiency is increased.

Ames Research Center, Moffett Field, California

Free-tip rotor blades can improve significantly the fuel efficiency and other performance characteristics of helicopters. Rotor free tips resemble the free-tip winglets that have resulted in improved performance when added to fixed wings. The application of the free-tip concept to helicopter rotors was proposed in 1980, and tests indicate no technical impediment to further development.

The free-tip rotor concept is so called because the outermost portion of the rotor blade pivots independently with respect to the inboard portion of the blade about a pitch axis parallel to the blade axis, located slightly forward of the aerodynamic center of the tip (see figure). The centrifugal force of the tip acts on a tension/torsion strap made of wire wrapped repeatedly around two spools. The tension and the elasticity of the wires make the device act as a torsion spring that biases the tip nose-up. The relative airstream tends to turn the tip nose-down, and the balance of torques causes the tip to "weathervane" to an intermediate angular position that results in a net positive aerodynamic lift.

The tension/torsion strap can be modified easily to obtain numerous torque-vs.-angle relationships. It is designed to apply a nearly constant pitch moment that causes the tip to generate a nearly constant lift as it travels around the azimuth. This reduces the fluctuation in lift, with two major beneficial effects: Flapwise vibratory loads on the blade and vibratory loads on the blade pitch-control mechanisms are reduced, while the negative lift produced by an advancing fixed tip is eliminated, thus reducing the amount of power required to achieve the same overall lift.

A scale-model four-blade rotor of 2.546-m radius with free tips at the outer 10 percent of the radius was tested in a wind tunnel, both with the tip free and with the tip locked to simulate a fixed-tip blade. At cruise speeds, the blade consumed 12 per-

cent less power in the free-tip condition than in the locked condition; at higher speeds, a reduction in the effects of compressibility reduces the power consumption even more.

The peak vibratory flapwise blade-bending moments and the oscillatory loads going into the control system were 40 and 70 percent less, respectively, in the free-tip than in the fixed-tip condition. These large reductions are attributed to the fact that the outer 10 percent of the blade span sweeps through 57 percent of the area of the rotor disk that makes the dominant contribution to the oscillatory blade loads.


Free-tip technology can be applied to tilt rotors and tail rotors as well as to helicopter rotors. Other benefits include the fol-

lowing:

- Reduction of 15 to 20 percent in sensitivity to gusts and
- Opportunities for design as in the use of thin tips for lower compressibility power and suppression of noise and in the use of highly swept tips without resultant high control loads at high speeds.

This work was done by Robert H. Stroub and Larry Young of Ames Research Center and Matthew Cawthorne and Charles Keys of Boeing Vertol Co. For further information, Circle 21 on the TSP Request Card.

Inquiries concerning rights for the commercial use of this invention should be addressed to the Patent Counsel, Ames Research Center [see page 20]. Refer to ARC-12151.

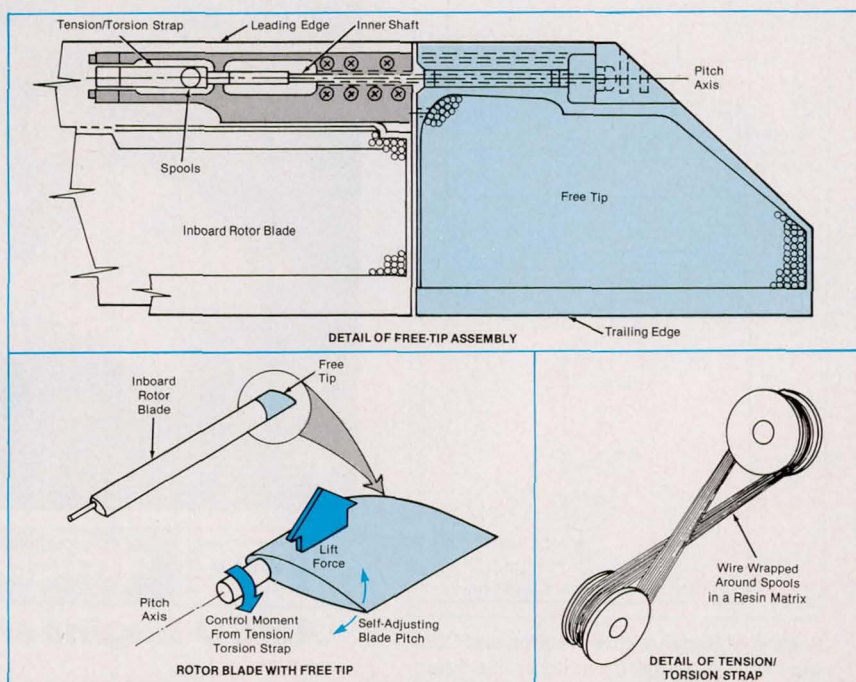

The **Free Tip** on a helicopter rotor blade pivots about a pitch axis near the leading edge. It provides a nearly steady lift, thereby reducing vibrations and power consumption.



Ultrasonic Probe for In Situ Inspection of Welds

Defects can be detected while the workpiece is still mounted for welding.

*Marshall Space Flight Center,
Alabama*


An end effector on a welding robot contains an ultrasonic transducer for inspection of the welds. An ultrasonic transducer detects such flaws as tungsten inclusions and lack of penetration of the weld. The end effector is used to determine the quality of a weld immediately after the weld has been made, while the workpiece is still mounted on the welding apparatus; the weld can be reworked in place, if necessary. The delay caused by the paperwork and setup involved in returning the workpiece for rework is thereby avoided.

The end effector can be mounted on any standard gas/tungsten arc-welding torch, including one equipped with a through-the-torch vision system. Its length is the same as that of a long gas cup with electrode.

A set of extension springs stabilizes the transducer and ensures that its elastomeric dry-couplant pad sits squarely on the weldment surface. The transducer can be rotated 360° and locked into alignment with the weld bead. A small force-actuated switch halts downward travel of the robot arm toward the workpiece and sets the force of contact between the transducer and the workpiece.

This work was done by Jeffrey L. Gilbert and Vincent Y. Paternoster of Rockwell International Corp. for **Marshall Space Flight Center**. For further information, Circle 110 on the TSP Request Card.

Inquiries concerning rights for the commercial use of this invention should be addressed to the Patent Counsel, Marshall Space Flight Center [see page 20]. Refer to MFS-29842.

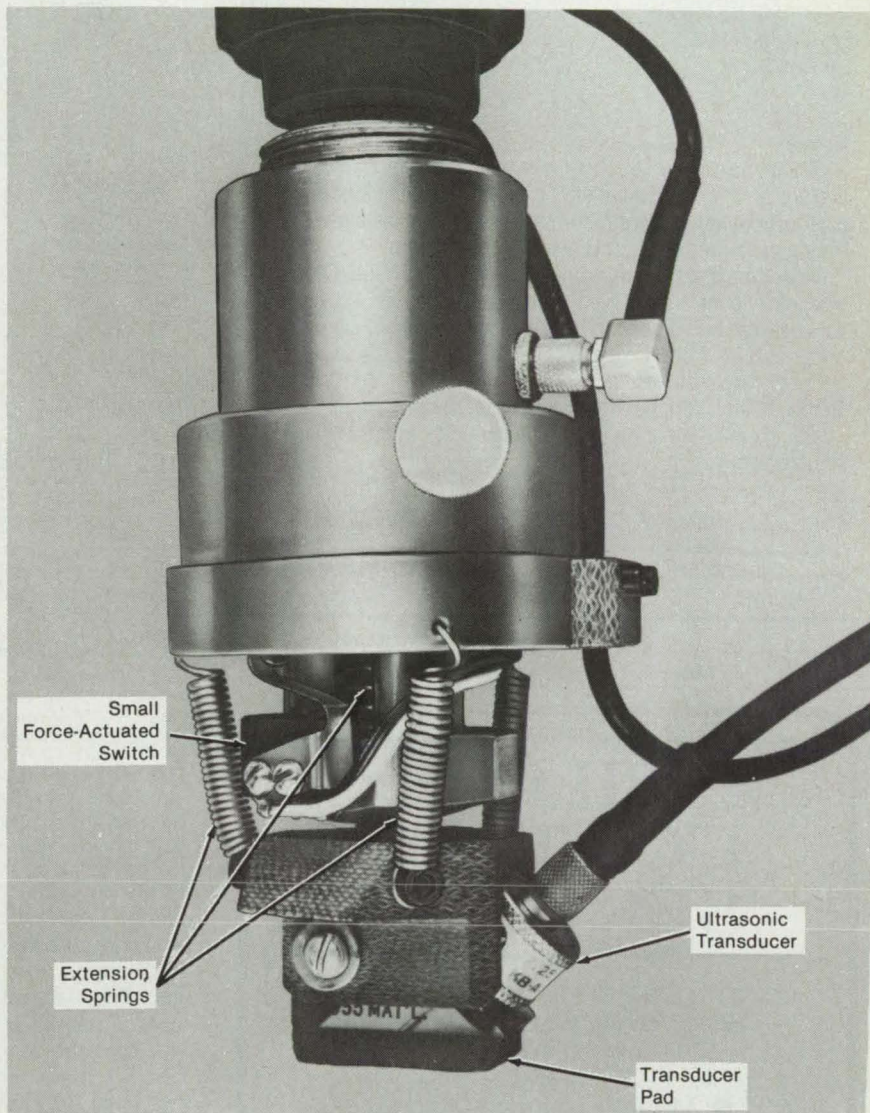

The **Ultrasonic End Effector** is installed on the welding torch in place of the gas cup and electrode, and used to inspect the weld. The elastomer-covered transducer makes contact with the weld bead.

Vacuum Plasma Spraying Replaces Electrodeposition

Fabrication times and costs are reduced.

Marshall Space Flight Center, Alabama

Vacuum plasma spraying can be used to fabricate large parts that have complicated contours and inner structures, without uninspectable welds. The technique greatly reduces both the time and the expense of fabrication. In the case of the Space Shuttle main engine combustion chamber, for example, it has been esti-

mated that vacuum plasma spraying will reduce the cost of fabrication by about \$1.7 million and the time required for fabrication by 2 years. [Fabrication of the combustion chamber by the older method costs \$4 million (1990 dollars) and takes 4 years.]

Although this particular combustion

chamber is an extreme case, it serves to illustrate the advantages of the vacuum-plasma-spraying method for the fabrication of complicated machine and instrument parts in general.

In the first step of the older method, a spin-cast Narloy-Z (or equivalent) billet is forged into an hourglass to form the liner

POWER AND CONTROL

The creativity, functionality and longevity of your product or system designs is now limited only by your imagination!

Terfenol-D redefines actuator and transducer performance!




Magnetostrictive Terfenol-D is redefining peak transducer and actuator performance. By overcoming the limitations of past technology, yesterday's impractical or impossible design can now become today's reality.

Actuators and transducers produced with Terfenol-D provide totally controllable, high-energy performance ... at low voltage, with micro-second response and unlimited life cycles ... over broad frequency and temperature ranges. Terfenol-D also offers the highest strain or dimensional change of any commercially available product.

For more information on Terfenol-D powered transducers, actuators, materials and systems design, call:

800-327-7291



ETREMA PRODUCTS, INC.

A Subsidiary of **EDGE Technologies, Inc.**
306 South 16th • Ames, IA 50010
515/232-0820 • FAX: 515/232-1177

For More Information Circle No. 592

PILOT COATING SERVICES

BRING YOUR DEVELOPMENT PROJECT TO THE INDUSTRY'S MOST ADVANCED PILOT COATING FACILITY.


- Multiple coating methods
- 12" to 32" web width
- Class 1000 clean room
- Advanced process controls
- On-line measurement
- Real-time data logging

Discover the technical sophistication that has made Rexham the world's leading custom coater. Call toll free or fax for more information.

REXHAM
INDUSTRIAL

PO Box 368, Matthews, NC 28106
Tel 800/736-9171 Fax 704/845-4333

For More Information Circle No. 521

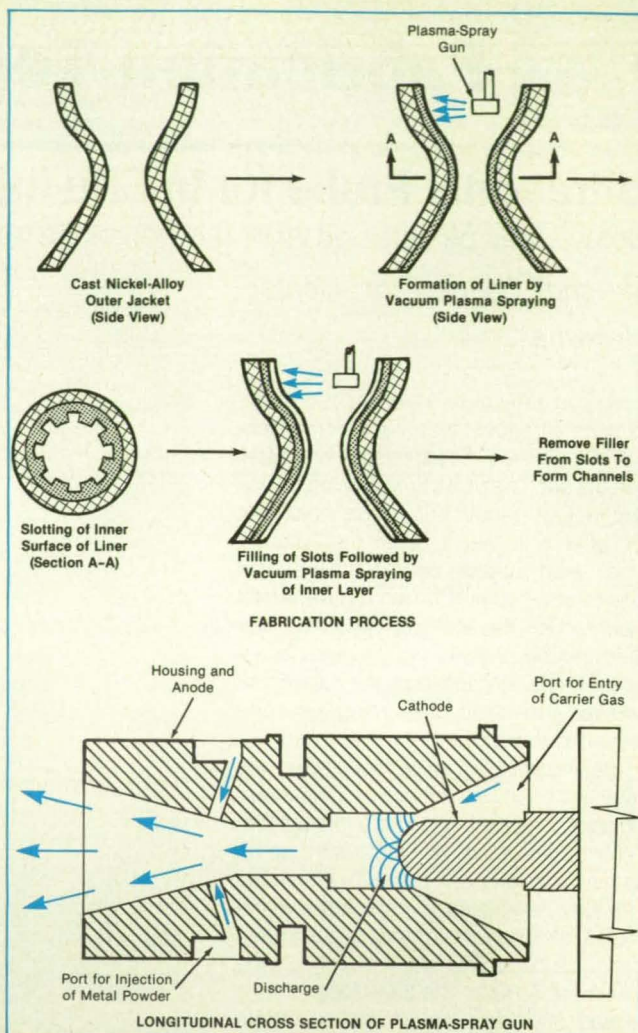

The **Wall of a Combustion Chamber** is built up on the inside of an outer nickel-alloy jacket by plasma spraying. Particles of the metal to be sprayed are partially melted in the plasma gun and thrown out at supersonic speed toward the deposition surface.

of the combustion chamber. Axial cooling channels are machined into the liner, then filled with wax. The filled channels and adjacent surfaces are covered with a thin layer of electrodeposited copper, on which a thicker layer of nickel is electrodeposited. The electrodeposition of nickel can take as long as 2,000 person-hours.

When the deposition of the nickel wall has been completed and the wax channel filler melted away, the halves of a thick forged nickel-alloy "clamshell" are attached by electron-beam and tungsten/inert-gas welding. The clamshell is attached to the liner by brazing. Then the coolant manifolds are welded to the top and the bottom of the combustion chamber.

In the newer method (see figure), the chamber is formed from the outside in, instead of from the inside out as in the older method. A layer of Narloy-Z is plasma-sprayed on the inner surface of a nickel-alloy outer jacket. Cooling channels are machined into the layer, and a temporary filler material is placed in the channels. Then plasma spraying is resumed to cover the channels and form the inner wall of the chamber.

This filler material is removed by etching. Mild steel is a promising filler. It leaves smooth channels and can be etched away by use of hydrochloric, phosphoric, or sulfuric acid, which does not attack Narloy-Z.

In comparison with the older method, the vacuum plasma-spray method produces a much stronger bond between the grooves and the covering layer that completes the channels and the wall of the combustion chamber. In burst tests, the bond withstood a pressure of 20 kpsi (about 140 MPa)—three times the allowable limit for units made by the old method.

NASA Tech Briefs, August 1992

Multiple Pages Intentionally Left
Blank

This work was done by Richard R. Holmes, Chris Power, David H. Burns, Ron Daniel, and Timothy N. McKechnie of **Marshall Space Flight Center**. For further information, Circle 27 on the TSP Request Card.

Inquiries concerning rights for the commercial use of this invention should be addressed to the Patent Counsel, Marshall Space Flight Center [see page 20]. Refer to MFS-28569.

Tape-Smoothing Tool for Adhesion Tests

A hand-held device assists in the application of the correct pressure.



Marshall Space Flight Center, Alabama


A small tool (see figure) helps to smooth out an adhesive tape uniformly to ensure consistency and repeatability of tape-peel tests of the adhesion of paint to a substrate. The tool, about the size of a cigarette lighter, is designed for ease of holding and handling.

The part of the tool that presses on the tape is a ring-shaped pad of soft polyurethane covered with an ultra-high-molecular-weight polyethylene fabric that resists wear and allows the tool to slide easily. An internal spring helps to regulate the force applied by the pad to the tape. Before use, the tool is calibrated with a 5-lb (2.3-kg) weight. The threaded indicator button is turned until the spring just begins to yield

under this weight.

To perform the tape-peel test, the technician first applies a strip of masking tape 6 in. (15.2 cm) wide to the surface to be tested. The technician presses the pad of the tool against the tape so that the indicator button shows that the calibrated force is being applied, then passes the tool twice along the tape. Finally, the tape is pulled away from the surface at an angle of 90°.

This work was done by Peter B. Allen of Martin Marietta Corp. for **Marshall Space Flight Center**. For further information, Circle 50 on the TSP Request Card. MFS-28599

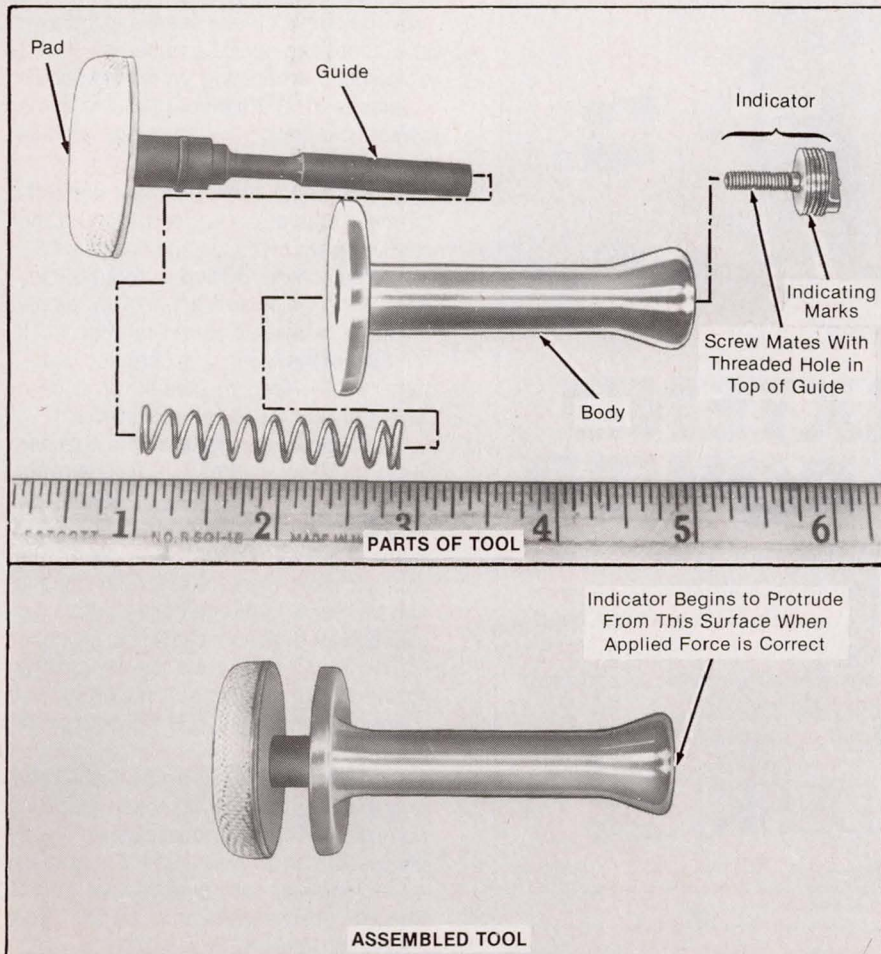

This **Mushroom-Shaped Tool** includes a resilient pad covered with a tough, smooth fabric. When its indicator button projects above the stem, the correct force is being applied.

3M Introduces Heat Shrinkable Cable Shield Terminators

Meet MIL-S-83519 for one-step soldering of ground wires to cable shielding

AUSTIN, Tex. — New 3M brand MIL-S-83519 shield terminators provide an insulated, environmentally protected strain relieved solder termination.



3M shield terminators are available in five diameters with and without pre-installed ground leads per MIL-S-83519.

A red thermochromic indicator is included in the solder flux. When sufficient heat has been provided for complete melting it becomes colorless, thus helping the technician know the soldered joint is complete.

Six alpha numeric characters in contrasting ink provide MIL spec markings that are clearly visible before and after application to assist quality control inspections.

Environmentally and mechanically protected solder connections are the result of a three part process:

1. The outer sleeve shrinks
2. The solder preform melts and flows, completing the connection
3. The thermo plastic insert melts to provide a seal

To aid in the correct application of these heat shrinkable shield terminators, 3M offers heating devices, MP-700 for hot air, ST-3000 for infrared.

The completed assembly provides thermal and electrical insulation, identification, strain relief, moisture sealing and chemical protection.

For more information contact a 3M Electrical Specialties Division representative or authorized distributor or call 1-800-322-7711.

3M Electrical Specialties Division
PO Box 2963
Austin, Texas 78769-2963



Making Crystal Filaments From Extruded Ceramic Rods

Ceramic or metal fibers can be produced at low cost.

Lewis Research Center, Cleveland, Ohio

A process produces single-crystal fibers of ceramic or metal, at a cost lower than that of previous methods. In the new process, a single-crystal filament is drawn from the tip of an extruded polycrystalline rod. The filaments can be used as reinforcing fibers in composite materials.

Previously, the rods were prepared from hot-pressed full-density disks. The disks

were cut into small slices that were ground into rods precisely square in cross section. Each rod was ≤ 4 in. (10 cm) long. Each cost about \$200 (1989 prices) and took 4 to 5 weeks to purchase.

In contrast, the extrusion process produces 20 or more rods in about an hour and saves an estimated \$100,000 per year. It produces longer rods from which longer

fibers can be drawn. Moreover, it can potentially feed the single crystal fiber drawing process directly. Continuous filaments can be made, and the material will not be subjected to contamination from storage and transfer to the drawing machine.

In the new process, ceramic or metal powder is mixed with solvent and a binder and extruded into rods 0.01 to 0.05 in. (0.25 to 1.27 mm) in diameter. The rods are heated as they are extruded to evaporate the solvent and possibly to sinter the ceramic powder.


The rod is fed into a float-zone apparatus in which a pair of focused laser beams melt the tip of the rod. Since a rod is smoothly handled by the feed mechanism and is rigid, it can be precisely positioned in the laser beams. The heat of the lasers drives off the volatile binder from the material and sinters it just before it melts. An oriented single-crystal seed fiber of the same material as that of the feed rod is brought in contact with the molten feed rod tip, forming a stable liquid zone between the single crystal seed and the feed rod. The single crystal seed is withdrawn at a controlled speed and carries with it a filament emanating from the single crystal seed. The filament has the same crystal orientation as the single crystal fiber drawing.

The diameter of the filament depends on the diameter of the feed rod and the relative speed of the rod and fiber. A 0.030-in. diameter feed rod that is about 60 percent dense will form a 0.023 in. single crystal at a relative-speed ratio of 1:1. If the ratio of the motions is changed to 4:2, the 0.030-in. feed rod would produce a single crystal 0.016 in. in diameter.

Alternatively, the extrusion material can be formulated so that it is flexible after being extruded and dried. It can then be wound on spools and uncoiled as it is fed to the drawing machine. A single-crystal filament more than 1,000 ft (300 m) long can be drawn from one coil. A patent application for this technology is in process.

This work was done by Leonard J. Westfall of Lewis Research Center. For further information, Circle 125 on the TSP Request Card.

This invention is owned by NASA, and a patent application has been filed. Inquiries concerning nonexclusive or exclusive license for its commercial development should be addressed to the Patent Counsel, Lewis Research Center [see page 20]. Refer to LEW-14921.

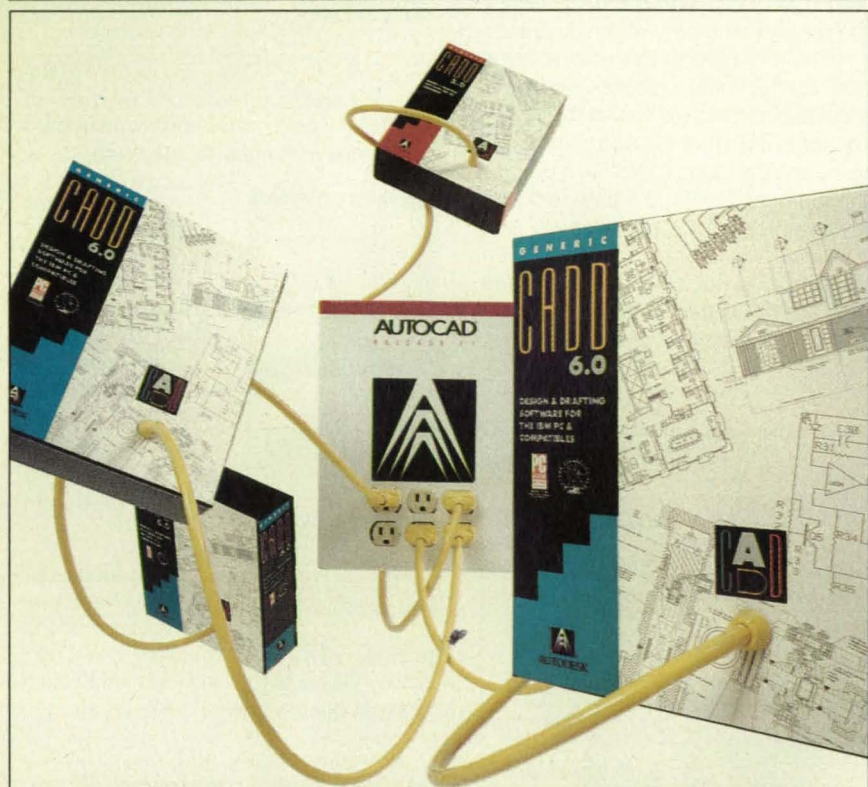

HOW TO EXTEND YOUR CAD POWER

With Generic CADD, you can put the power and productivity of CAD on every desk. From engineering to manufacturing to tooling and more, Generic CADD allows you to view, edit, export and print your valuable AutoCAD* designs, or sketch design concepts. Generic CADD runs on standard PCs, Macs, and laptops, utilizing existing hardware. At \$495, it's the economical way to extend CAD power. To learn why over 300,000 people have powered up with Generic CADD software, call 1-800-228-3601.

Ask for Info Pak #A29.



AUTODESK



*Generic CADD 6.0 and Generic CADD for Macintosh 2.0 - load native AutoCAD DWG drawing files directly. Copyright 1992 Autodesk Retail Products. All rights reserved. Generic CADD is a registered trademark of Autodesk Retail Products. AutoCAD, Autodesk, and the Autodesk logo are registered in the U.S. Patent and Trademark Office by Autodesk, Inc. Macintosh is a registered trademark of Apple.

For More Information Circle No. 420

Obtaining Patterns of Holes in Directional Couplers

Impressions of holes are taken in talcum powder.

NASA's Jet Propulsion Laboratory, Pasadena, California

A simple technique enables the reproduction of the pattern of holes in the hidden common wall of a microwave directional coupler. The technique is also applicable to other equipment that contains inaccessible holes in a common wall between adjacent tubes. The tubes can be cylinders of round, rectangular, or otherwise-shaped cross section. To enable the use of the technique, at least one of the tubes must be straight.

One surface of a section of waveguide narrower than the interior of the straight section of the directional coupler is covered with clear double-sided adhesive tape. This section is inserted in the straight section of the coupler, and held in place with wood

wedges (see figure). Talcum powder is poured into a port of the bent section of the coupler, and the assembly is shaken vigorously to distribute the powder. The wedges are removed, and the inserted section of waveguide is carefully withdrawn from the straight section. The double-sided tape now contains an accurate reproduction, in talc, of the hidden coupling holes.

This work was done by Raul M. Perez

of Caltech for NASA's Jet Propulsion Laboratory. For further information, Circle 86 on the TSP Request Card.

This invention is owned by NASA, and a patent application has been filed. Inquiries concerning nonexclusive or exclusive license for its commercial development should be addressed to the Patent Counsel, NASA Resident Office-JPL [see page 20]. Refer to NPO-18454.

ARE YOU SPENDING TOO MUCH TIME DRAWING FLOWCHARTS? YOU NEED FLOW CHARTING™ 3.



Every day, professionals worldwide save time and money using Flow Charting 3. It's fast, efficient, easy to use, and always produces presentation-perfect charts and diagrams.

With Flow Charting 3's built-in flexibility, you can create customized charts using a variety of shapes, lines, and text—placed where you want them.


Plus, Flow Charting 3 is now available in a LAN version. Making it easy to share files and set up work groups for specific projects.

And it's backed with free technical support and a 90-day no-risk guarantee. So if you're spending too much time drawing charts, call for a free demo and see for yourself what makes Flow Charting 3 the best-selling flowcharting software.

See your dealer today! Or for a free interactive demo disk, call 1-800-525-0082, ext. 2908.

International: 408-778-6557, ext. 2908.

Novell is a registered trademark of Novell, Inc.

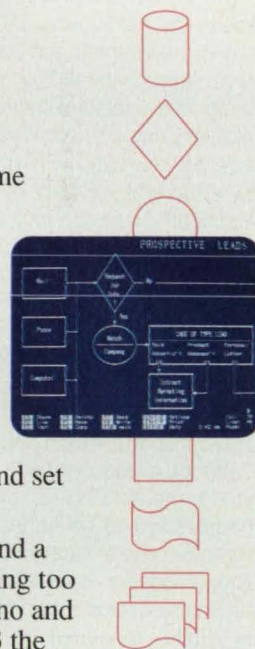


PATTON & PATTON
Software Corporation

Excellence in charting the flow of ideas!

Patton & Patton Software Corp. 485 Cochrane Circle, Morgan Hill, CA 95037

For More Information Circle No. 499

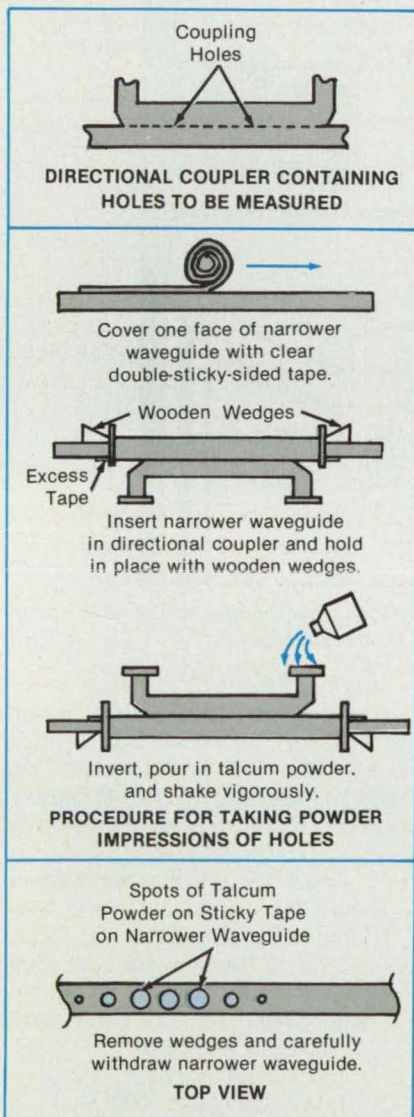

The **Talcum-Dusting Procedure** yields a pattern of powder on adhesive tape that shows the sizes of distances between interior holes. Later, the microwave coupler can be cleaned with water or compressed air.

Lunar Habitat Would Be Assembled in Space

Living quarters for a crew of 12 would be built into a used propellant tank.

Langley Research Center, Hampton, Virginia


A conceptual lunar habitat would be built inside an external tank from the National Space Transportation System (NSTS) spacecraft. The NSTS spacecraft consists of an orbiter, external tank, and two solid rocket boosters. The solid rocket boosters are used for approximately 2 minutes during each launch and are recovered for reuse. The external tank is an expendable structure used for approximately 8½ minutes during each launch to provide enough liquid oxygen and liquid hydrogen to the main engines of the orbiter to place the orbiter into low orbit around the Earth.

Heretofore, the external tanks have been jettisoned immediately prior to insertion into low orbits around the Earth. The tanks have subsequently tumbled and broken up in the atmosphere before falling over open seas. In the lunar-habitat concept, the external tank would be placed in orbit and the hydrogen tank would be separated from the intertank, leaving a unit consisting of the liquid-oxygen tank and the intertank that could be outfitted as a lunar habitat (see figure).

The tank would be inserted into low orbit around the Earth, where it would be partially disassembled and outfitted as a 12-person lunar habitat. The modifications to the liquid-oxygen-tank-intertank unit would utilize existing structures and openings for access by humans without compromising the structural integrity of the tank. The modifications would include the installation of living quarters, instrumentation, and an air lock. Thermal-control, environmental-control life-support, and propulsion systems would also be added.

The habitat would be designed for unmanned transport to low orbit around the Moon and autonomous soft landing on the surface of the moon. At Space Station *Freedom*, a resource node, an air lock, and environmental-control and life-support modules would be added to enable the maximum use of intravehicular activity. Additional aids for assembling the habitat at the Space Station *Freedom* would include an orbital maneuvering vehicle and a mobile servicing center with robotic end effectors, which would minimize the amount of extravehicular activity required to outfit the habitat.

Post-landing operations prior to occupancy would include erection of a radiator panel, the installation of an auxiliary power system, and the addition of a regolith for shielding against solar energetic particles and galactic cosmic radiation. The regolith could be added to the cavity between the micrometeoroid shield and the wall of the tank. The regolith would also provide addi-

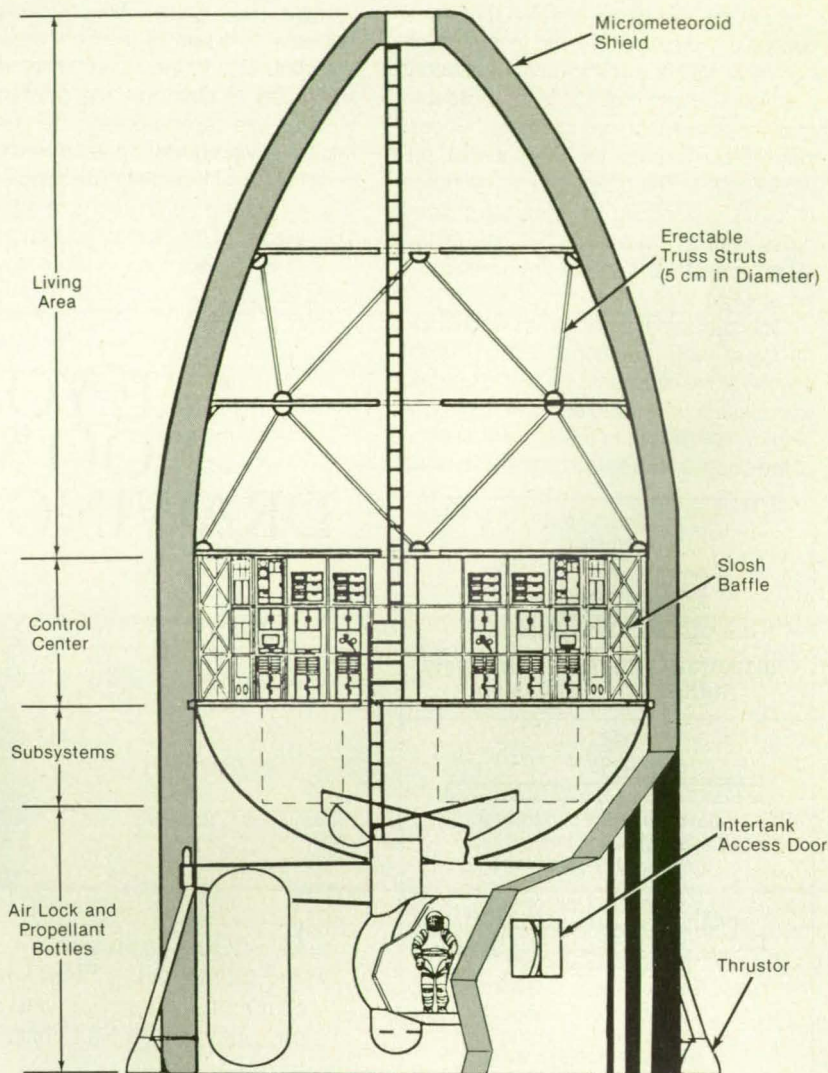

The Lunar Habitat, shown here as it would look after landing on the Moon, would be made by outfitting a used NSTS external propellant tank.

tional thermal insulation and protection against meteoroids. The radiator panels would be positioned vertically, approximately 15 m from and connected to the lunar habitat, and oriented parallel to the plane of the solar ecliptic.

The habitat would then be ready to house a crew of 12 for as long as 70 days between resupply missions. The lunar habitat is expected to become feasible by the year 2000 with the concurrent development of a space transfer vehicle and manned cargo lander for exchange of crews and resupply.

This work was done by Charles B. King, Ansel J. Butterfield, and Warren D. Hypes of Bionetics Corp.; Lisa C. Simonsen of Planning Research Corp.; and John B. Hall, Jr., A. Don Scott, Jr., and John E. Nealy of **Langley Research Center**. Further information may be found in NASA TM-4212 [N91-14251], "Single Launch Lunar Habitat

Derived From NSTS External Tank."

Copies may be purchased [prepayment required] from the National Technical Information Service, Springfield, Virginia 22161, Telephone No. (703) 487-4650. Rush orders may be placed for an extra fee by calling (800) 336-4700.

Title to this invention has been waived under the provisions of the National Aeronautics and Space Act [42 U.S.C. 2457(f)], to The Bionetics Corp. Inquiries concerning licenses for its commercial development should be addressed to

Charles H. Burr, Esq.

The Bionetics Corp.

Tenth Floor, Suite 1000

Harbour Centre Building

2 Eaton Street

Hampton, VA 23669

Refer to LAR-14234, volume and number of this NASA Tech Briefs issue, and the page number.



Recognizing Patterns in Log-Polar Coordinates


The log-Hough-transform method offers economy of representation and computation.

Lyndon B. Johnson Space Center, Houston, Texas

The log-Hough transform is the basis of an improved method for the recognition of patterns — particularly, straight lines — in noisy images. The log-Hough transform is so named because it is derived by synthesis of a modified Hough transform with a log-polar coordinate system that is used to represent the raw image data. The resulting unification of the iconic and Hough domains simplifies computations in the recognition of lines and eliminates the erroneous quantization of slopes attributable to the finite spacing of the Cartesian coordinate grid of the classical Hough transform. The method can be implemented in hardware and/or software.

The log-polar representation is already well established in imaging technology and science: Log-polar coordinates are the ray-ring coordinates of experimental polar-exponential image arrays of charge-coupled-device (CCD) photodetectors. NASA's Johnson Space Center has several varieties of video remappers, which can convert image data from Cartesian CCD arrays to the log-polar representation at video frame rates. The eye-to-brain mapping is log-polar except in the fovea. The in-place-processing and scale-invariant properties of the log-Hough transform may well have significance for the neurophysiological architecture of human vision.

The definition of some terms and a description of the modified Hough transform are prerequisite to an explanation of the new method. A straight line in the image or in the Cartesian representation of the image becomes a curved line in the log-polar domain (see figure). This curved line is denoted the "log line" for short. The leftmost point of the curve, called its "apex," represents the point of closest approach of the Cartesian straight line to the origin of the Cartesian coordinates. The Cartesian straight line through a given point of closest approach to the origin is called the "apical line" of that point, and the log line of which a given point is the apex is called the "apical log line" of that point. The scale invariance of the log-polar representation manifests itself in the identical shape and orientation of all log lines; log lines differ from each other only in location. The modified Hough transform of a Cartesian straight line is its apex in the log-polar domain. The modified Hough transform of a Cartesian point is the mirror image, reflected about a vertical line through the point in the log-polar do-

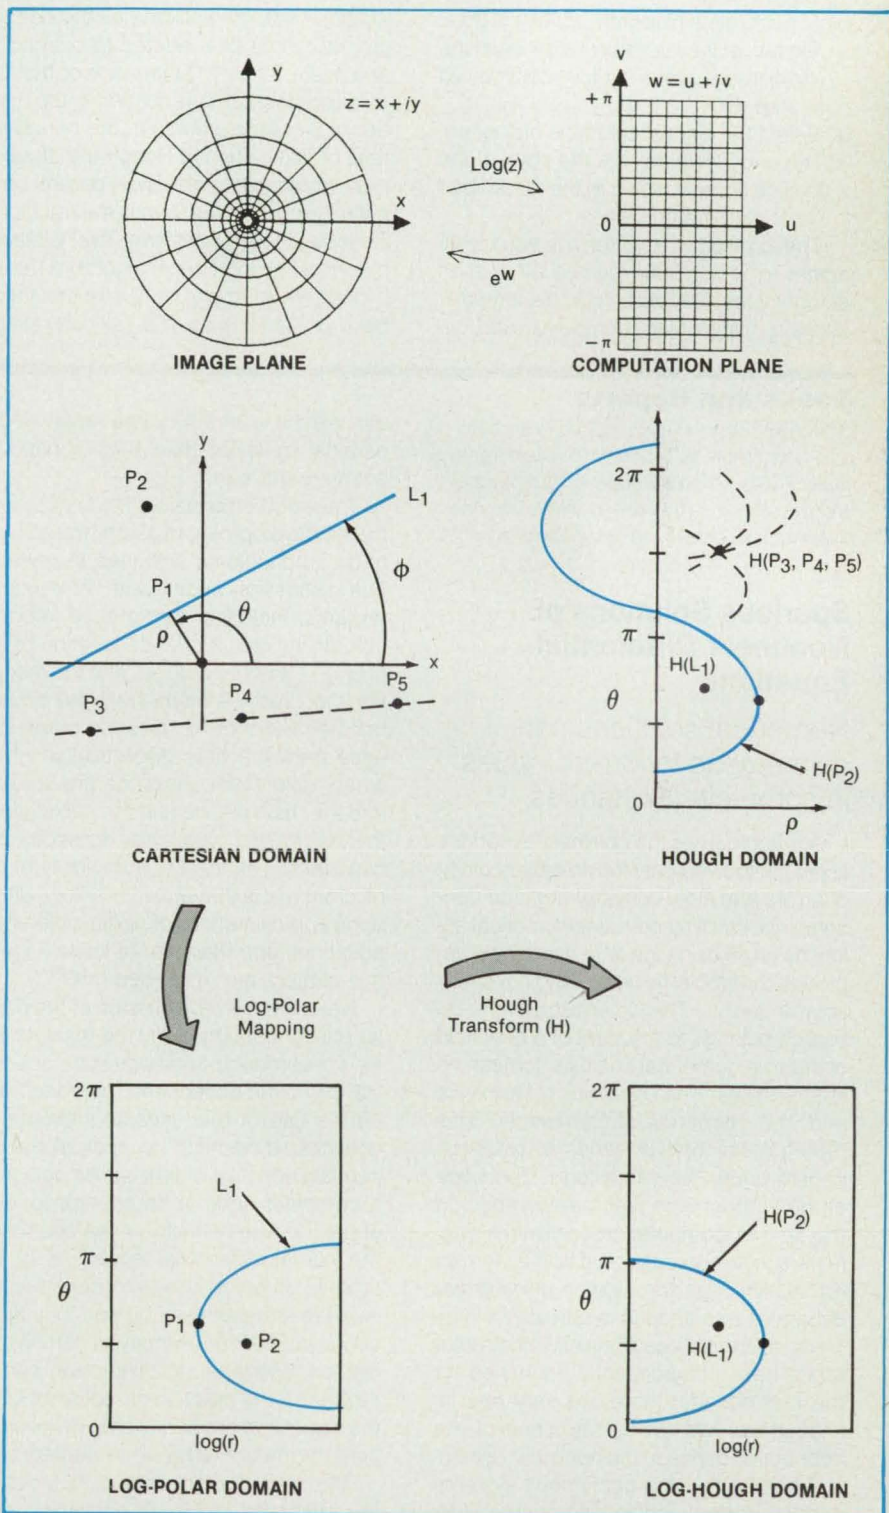

The **Log-Hough Transform** takes advantage of the rotational and scale invariance of the mapping from Cartesian to log-polar coordinates.

main, of the apical log line of that point.

The new method prescribes the following algorithm for the recognition of a straight line.

- (1) By edge detection or other suitable means, select candidate points in the log-polar image that may lie on edges or lines.
- (2) Construct the mirror image of the apical log line of every candidate point (the modified Hough transform of every candidate point).
- (3) Accumulate a histogram, in the log-polar domain, of the intersections between the mirror-image apical log lines constructed in step 2.
- (4) Select the highest bin in the histogram. The underlying point is the apex of the log line corresponding to the recognized Cartesian straight line.

The log-Hough transform is equally efficient in recognizing curves other than straight lines. For example, in the log-polar domain, hyperbolas, parabolas, and cir-

cles are copies of the log line respectively scaled by the factors $\frac{1}{2}$, 2, and -1 . Log-Hough algorithms for recognizing these figures are thus identical to the algorithm described above, with appropriate scaling of construction templates. Generalization to other geometric entities requires proper interpretation of their log-polar transforms. Regardless of the patterns to be recognized, scale and rotation invariance are automatic in this coordinate system.

The rotation and scale invariance of the log-polar mapping eliminates the need to process most data related to orientation and scale. Another advantage of the log-polar domain is the reduction in the number of picture elements in the peripheral field of view. The log-Hough transform is more amenable to massively parallel computing architectures than is the traditional Cartesian Hough transform. The "in-place" nature of the log-Hough algorithm makes it possible to apply local pixel-neighborhood processing as in a "silicon retina."

No buses are required to export data off-retina to an external Hough domain. In-place "drawing" of log-line templates would consist of enabling nearest-neighbor excitation paths. Histogram bins could be implemented via analog aggregation circuits.

This work was done by Carl F. R. Weiman of Transitions Research Corp. for Johnson Space Center. For further information, Circle 105 on the TSP Request Card.

In accordance with Public Law 96-517, the contractor has elected to retain title to this invention. Inquiries concerning rights for its commercial use should be addressed to

*Dr. John Evans, President
Transitions Research Corp.
15 Great Pasture Road
Danbury, CN 06810*

Refer to MSC-21758, volume and number of this NASA Tech Briefs issue, and the page number.

Books and Reports

These reports, studies, handbooks are available from NASA as Technical Support Packages (TSP's) when a Request Card number is cited; otherwise they are available from the National Technical Information Service.

Spurious Solutions of Nonlinear Differential Equations

Numerical solutions can converge to incorrect values in some circumstances.

A report utilizes the nonlinear-dynamics approach to investigate the possible sources of errors and slow convergence and non-convergence of steady-state numerical solutions when using the time-dependent approach for problems containing nonlinear source terms. This interdisciplinary research belongs to a subset of a new field of study in numerical analysis sometimes referred to as "The Dynamics of Numerics and The Numerics of Dynamics". This report is the first of series of research papers under the same topic. The hope of the authors is to reach researchers in the field of computational sciences and, in particular, computational fluid dynamics (CFD). Although the studies of nonlinear dynamics and chaotic dynamics for nonlinear differential equations and for discrete maps have independently flourished for the last decade, there are very few investigators addressing the issue of the connection between the nonlinear dynamical behavior of the continuous systems and the corresponding discrete map (difference equation) resulting from finite-difference discretizations. It is important to realize that these nonlinear discrete maps

can exhibit a much richer range of dynamical behavior than their continuum counterparts can.

The report emphasizes the implications for the development of algorithms in CFD and computational sciences in general. The discussion begins with introductory remarks, including background information, definitions, a brief description of the phenomena to be studied, and the motivations for studying them. Next, the dynamical behaviors of the discrete maps that arise from the time discretization of ordinary differential equations are studied, and the main results and the implications thereof for computational sciences are described. The level of complexity of the discrete maps that arise from finite-difference approximations of partial differential equations and the state of knowledge of this subject are described briefly.

Next, there is a discussion of the popular misconceptions of (1) the residual test for convergence in steady-state solution via the "time-dependent" approach and (2) the use of the "inverse problems of nonlinear dynamics" to analyze the dynamical behavior of time-series data from a computer code in an attempt to learn about the true behavior of the solution of the partial differential equations of the system of which the time series is the discrete-time-sampled output. This application of time-series analysis can be misleading, and a wrong conclusion can be reached if the practitioner does not know the solution of the partial differential equations by means other than numerical.

The main fundamental conclusion of the study for problems containing nonlinear source terms is that, even in the absence of truncation and round-off errors, there are qualitative features of the non-

linear differential equations that cannot be adequately represented by the finite-difference method and vice versa. The discrete maps that result from finite discretizations can exhibit a range of dynamical behavior much richer than that of the continuum counterparts of these discrete maps. Spurious stable as well as unstable steady-state numerical solutions, spurious asymptotic numerical solutions of higher period, and even stable chaotic behavior can occur in finite-difference solutions. A typical feature is the existence of spurious numerical asymptotes that can interfere with stability, accuracy, and basins of attraction of the true physics of the continuum.

The occurrence of spurious asymptotes is independent of whether the nonlinear differential equation in question has a unique steady-state solution or additional periodic solutions and/or exhibits chaotic phenomena. The form of the nonlinear differential equation and the type of numerical solution scheme are the determining factors. In the past, there was a tendency to ignore spurious asymptotes on the assumption that they all lie beyond the linearized stability limits of the time step. In this study, it is shown that bifurcations to and from spurious asymptotic solutions, and transitions to computational instability, not only are highly dependent on the problem and the solution scheme but are also dependent on initial data and boundary conditions and not limited to time steps that are beyond the linearized stability limit.

For these reasons, it is essential for practitioners in computational sciences to be knowledgeable about the dynamical behaviors of finite-difference methods for the solution of nonlinear scalar differential equations before applying these methods to practical computations. It is also im-

portant to change the traditional way of thinking and practices when dealing with genuinely nonlinear problems.

This work was done by H. C. Yee of Ames Research Center, P. K. Sweby of the University of Reading, and D. F. Griffiths of the University of Dundee. Further information may be found in NASA TM-102820 [N90-22339], "Dynamical Approach Study of Spurious Steady-State Numerical Solutions of Nonlinear Differential Equations, Part I — The ODE Connection and Its Implications for Algorithm Development in Computational Fluid Dynamics."

Copies may be purchased [prepayment required] from the National Technical Information Service, Springfield, Virginia 22161, Telephone No. (703) 487-4650. Rush orders may be placed for an extra fee by calling (800) 336-4700. ARC-12770

Software for Computing Selected Functions

Routines in the Ada language support scientific and engineering functions.

A NASA technical memorandum presents a collection of software packages in the Ada computing language that implement selected mathematical functions used in science and engineering. It provides the Ada programmer with the mathematical-function support found in the Pascal and FORTRAN computing languages, plus support for extended-precision arithmetic and complex arithmetic.

The software packages were developed as infrastructure for programs to be used in testing a new computer. They were written under the assumption that the computer conforms to the Institute of Electrical and Electronics Engineers 754-1985 standard for single binary floating-point arithmetic and can handle 32-bit integers. The results of computations with these software packages should be the same on the original intended computer or on any other computer that satisfies these requirements; this universality makes the software valuable for testing new computers in general, writing computer code for general distribution, or possibly developing new computing integrated circuits.

The extended-precision-arithmetic software package provides accuracy to 47 bits in multiplication, 46.5 bits in division, and 48 bits in addition (single-precision arithmetic in the IEEE 754-1985 standard is accurate to 24 bits at most). The complex-arithmetic software package implements Cartesian complex arithmetic in floating-point numbers; a complex absolute-value function and a complex square-root function are included.


There are two mathematical-function software packages: one for basic and one for transcendental functions. The basic functions are floor (nearest integer less than or equal to), ceiling (nearest integer greater than or equal to), truncation (round toward zero to integer), modulo, and pseudorandom number. The transcendental functions are the sine, cosine, exponential, natural logarithm, square root, arc tangent, and proper-quadrant arc tangent (the arc tangent of x/y in the proper quadrant of Cartesian coordinates x, y).

The document includes brief descriptions of the algorithms implemented by the

software packages, with analyses of errors. The software packages are presented in appendixes.

This work was done by David C. Grant of Ames Research Center. Further information may be found in NASA TM-102256 [N90-16423], "Basic Mathematical Function Libraries for Scientific Computation."

Copies may be purchased [prepayment required] from the National Technical Information Service, Springfield, Virginia 22161, Telephone No. (703) 487-4650. Rush orders may be placed for an extra fee by calling (800) 336-4700. ARC-13117

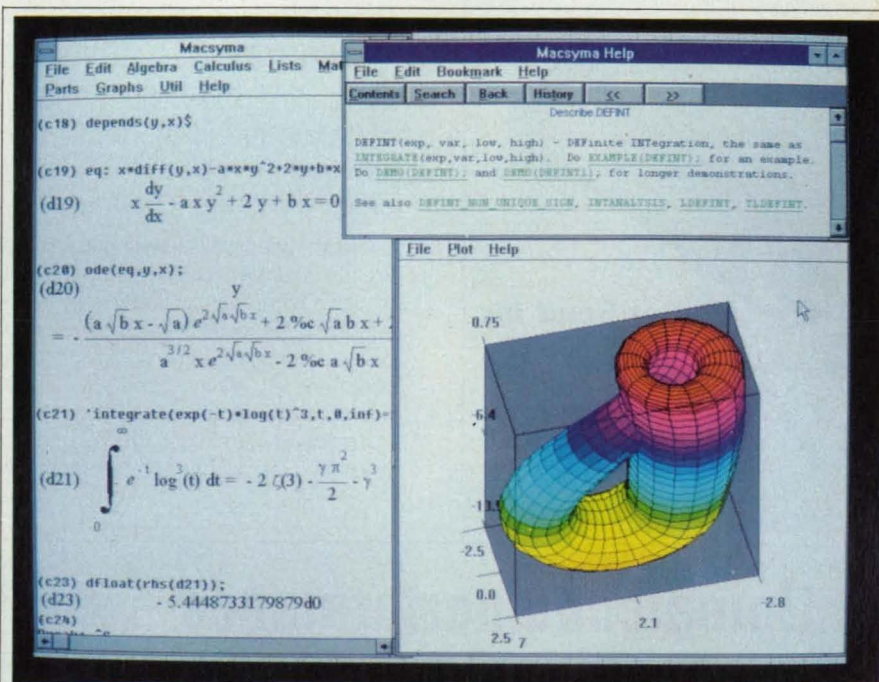

The Superstar of Mathematical Software Macsyma Now Costs \$349.00*

An Unbeatable Value on PCs and Workstations

Macsyma not only offers the most complete and reliable portfolio of mathematical capabilities, it now has an unbeatable price. Macsyma's new PC version runs as a regular Windows 3.1 application with many improvements.

- World's best trig simplification and best differential equation packages are now even stronger. Factoring of large integers is 1,000 times faster.
- Color Scientific Graphics includes graphic windows with user controls for rotate, zoom, hardcopy printing, postscript output, colors, plot labels. Also, plotting of parameter surfaces, improved hidden line removal.
- New screen display of special math symbols, exponents, and Greek letters makes output more readable.†
- Easy-to-use hypertext† on-line help system with 1,500 text entries, 500 executable examples and demonstrations. Function templates† indicate function names and argument slots.

If you want the best mathematical software at a price the competition can't touch, call 1-800-MACSYMA (1-800-622-7962) or FAX 617-646-3161. Quantity discounts and academic prices are available. *Small workstations start at under \$1,000. †only on PC at this time.

Macsyma Inc.

20 Academy Street, Arlington, MA 02174

SURFACE MOUNT ADHESIVES

Designed To Your Specifications

MASTER BOND EP3HTSM EPOXY

- One part system
- Exceptionally fast cure speeds at low temperatures
- Highly controllable thixotropy
- Long storage stability without refrigeration
- Convenient packaging
- Superior bond strength
- Void-free cures
- Repairability



Call or write:
Master Bond Inc.
154 Hobart Street
Hackensack, NJ 07601
201-343-8983

Master Bond Inc.
Adhesives, Sealants & Coatings

For More Information Circle No. 444



Life Sciences

Books and Reports

These reports, studies, handbooks are available from NASA as Technical Support Packages (TSP's) when a Request Card number is cited; otherwise they are available from the National Technical Information Service.

Efflux of Nitrate From Hydroponically Grown Wheat

Increasing the concentration of nitrate in the nutrient solution increases the efflux of nitrate.

A report describes experiments to measure the influx of nitrate into, and the efflux of nitrate from, hydroponically grown wheat seedlings. Because the influx of nitrate requires adenosine triphosphate and thus costs energy, finding conditions that reduce this efflux could lead to more-efficient utilization of nitrogen by crop plants. This would be particularly important for the pro-

duction of crops in a spacecraft on an extended mission — where available energy would be limited.

In the experiments, wheat seedlings were grown hydroponically in a 1/4-strength Hoagland's solution for 8 days in an environmentally controlled growth chamber at 400 $\mu\text{E}/\text{m}^2\text{s}$, at temperature of 18 °C and 80 percent relative humidity. On the 7th day, they were transferred into 1/4-strength Hoagland's solution (loading solution) containing nitrate (plus, in some cases, chlorate) at the concentration specified for each experiment. After removal from the loading solution, 10 seedlings were rinsed in 300 mL of the efflux solution and then placed in 60 mL of this solution for specified times. The amount of nitrate released in each such time was measured by use of high-performance liquid chromatography. Rates of uptake of nitrate and chlorate were determined from the rates of depletion of these ions from substrate solutions.

The results of the experiments showed that the ratio between the efflux and influx of nitrate was greater in darkness than in light and increased with the concentration of nitrate in the nutrient solution. On the basis of these experiments, the authors suggest that a nutrient solution should be optimized at the lowest possible concentration of nitrate.

The feasibility of using chlorate as a trapping agent (that is, as a competitive inhibitor of uptake of nitrate) for effluxed nitrate was assessed, and its toxicity determined. The toxicity of chlorate was apparent after 1 h, but little toxicity was observed during nitrate-efflux experiments that lasted up to 20 min. Higher rates of efflux of nitrate were detected as the concentration of chlorate was increased in the efflux solution — perhaps because chlorate served as a trapping agent for effluxed nitrate.

This work was done by R. C. Huffaker, M. Aslam, and M. R. Ward of the University of California at Davis for Ames Research Center. Further information may be found in NASA CR-177534 [N89-27346], "Efficiency of N Use by Wheat as a Function of Influx and Efflux of NO_3^- ."

Copies may be purchased [prepayment required] from the National Technical Information Service, Springfield, Virginia 22161, Telephone No. (703) 487-4650. Rush orders may be placed for an extra fee by calling (800) 336-4700. ARC-12628

Unmatched performance in noncontact measurement.

Our fiber-optic and capacitive noncontact measurement systems offer submicroinch resolution and high frequency response for a range of demanding applications:



Accumeasure System II



MTI-2000 Fotonic Sensor

- Vibration and modal analysis
- Runout and bearing analysis
- Gap and positioning control
- Thickness measurement
- Surface finish inspection

Our experienced engineers are ready to help you solve your measurement problems. Call us with your application: 1-800-342-2203.

MTI Instruments

968 Albany-Shaker Road
Latham, New York 12110
518/785-2464 FAX: 518/785-2806



For More Information Circle No. 337

NASA Tech Briefs, August 1992

Air-Traffic Controllers Evaluate the Descent Advisor

An automation aid is found to assist controllers without restricting them unduly.

A report describes a study of the performance of the Descent Advisor algorithm, a software automation aid intended to assist air-traffic controllers in efficiently spacing traffic and meeting specified times of arrival at designated positions (called "metering fixes") in the sky. The Descent Advisor is based partly on mathematical models of weather conditions and the performances of aircraft. It generates suggested clearances, including top-of-descent points and speed-profile data, for one or more aircraft to attain specific time or separation-distance objectives. The interface between the Descent Advisor and the controller is a mouse-based, menu-driven computer-terminal display that enables the controller to use the predictive capability of the Descent Advisor to resolve conflicts and issue advisory notices to the pilots of arriving aircraft.

This study focused on the operational characteristics of the Descent Advisor, with specific attention to how the Descent Advisor can be used for the intended purposes of prediction, spacing, and metering. The experimental part of the study involved the use of the Descent Advisor by both currently employed and retired air-traffic controllers in a computer simulation of air traffic approaching Denver's Stapleton International Airport. Controllers followed the procedures of the Denver Air Route Traffic Control Center and operated in teams of two as they do at present — one monitoring a radar display of traffic, the other entering information onto flight strips and operating the computer keyboard. When using the Descent Advisor, the controller who normally operated the keyboard used the mouse instead.

Evaluations by the controllers indicated considerable enthusiasm for the Descent Advisor and provided specific recommendations for using it effectively. One member of the two-member controller team for each arrival sector used clearances generated by the Descent Advisor, while the other used manual flight strips as in current practice. When the controllers encountered problems that fell outside the domain of the Descent Advisor, they used conventional vectoring techniques to establish the desired spacings, then resumed the use of the Descent Advisor without difficulty.

Controllers used the Descent Advisor in various ways, some relying heavily on time-line data, others concentrating on the auxiliary information provided directly on maps. Thus, even in the initial evaluation,

operation was sufficiently flexible that controllers did not feel that the Descent Advisor restricted them.

One major issue in the continued development of the Descent Advisor and other automation aids is the need for adequate training to ensure that evaluations by controllers are meaningful. The Descent Advisor as evaluated is not simple; nor are the controllers accustomed to the sophisticated display format in which it was presented. Adequate time should be allowed for training, and there is a need for the development of a step-by-step training strategy. In addition, it was found that working with a group of controllers for a considerable time was effective in en-

abling these controllers to train other controllers to serve as subjects in the simulations.

This work was done by Leonard Tobias, Uwe Volckers, and Heinz Erzberger of Ames Research Center. Further information may be found in NASA TM-102197 [N89-25981], "Controller Evaluations of the Descent Advisor Automation Aid."

Copies may be purchased [prepayment required] from the National Technical Information Service, Springfield, Virginia 22161, Telephone No. (703) 487-4650. Rush orders may be placed for an extra fee by calling (800) 336-4700.

ARC-12622

A Special Notice to Readers of NASA TECH BRIEFS

Please be advised that the Teledyne Relays advertisement appearing in the April 1992 issue of NASA TECH BRIEFS magazine (Reader Action No. 348) contains an error. Teledyne Relays inadvertently stated that our TO-5 relays are qualified to "L", "M" and "P" levels of MIL-R-39016. At the current time, our maglatch TO-5 relays are qualified to "L" and "M" levels of MIL-R-39016 only.

We regret any inconvenience caused by this oversight.

 **TELEDYNE RELAYS**

License to exceed normal limits



Zirconia Fiber-Based Materials offer limitless possibilities

When you need exceptionally high temperatures, low thermal conductivity or resistance to chemical attack, choose one of Zircar's Zirconia fiber-based materials. Bulk fibers, flexible textiles, rigid boards or cylinders: nobody knows how to take Zirconia to the limit like Zircar!



P.O. Box 458, Florida, NY 10921
Tel: (914) 651-4481 Fax: (914) 651-3192

For More Information Circle No. 621



GRAPHALLOY® BUSHINGS Work Where Others Won't

A Graphite / Metal Alloy:

- 1) Self-lubricated...no oil, no fumes, odor or sparking.
- 2) Low/High temperature...minus 400°F. to over 750°F.
- 3) Low coefficient of friction...solid GRAPHALLOY throughout.
- 4) Submerged...no expansion or wash-out in most liquids even to molten metal.
- 5) High Loads. Will not cold flow.
- 6) No Corrosion. Withstands most environments.
- 7) Low coefficient of thermal expansion.
- 8) High Speeds...for pumps, centrifuges.



What's YOUR Bearing PROBLEM? We have SOLUTIONS!

GRAPHITE METALLIZING Corporation

1050 Nepperhan Ave., P.O. Box 110, YONKERS, NY 10702

Tel. 914-968-8400 • Telex 13-1571 • FAX 914-968-8468

For More Information Circle No. 392

New on the Market

Omega Engineering Inc., Stamford, CT, has released IPC-XPRT, **data acquisition software** that transforms a PC into a process monitor and control workstation. The IPC-XPRT icon-driven graphical interface can display data as bar graphs, radial or linear meters, trend lines, digital indicators, or animated process diagrams. The system supports analog and digital I/O, thermocouples, RTDs, strain gauges, and advanced mathematical functions.

For More Information Circle No. 800


Advanced Technology Materials Inc., Danbury, CT, has introduced a line of **semiconducting diamond thin films** that offer extreme hardness, thermal conductivity, resistance to heat and cold, and the ability to adhere to various substrates. The materials can be used in high-voltage photoconductive switches that allow precise impulse radar imaging, diamond transistors for high-temperature and high-radiation environments, particle detectors, and clinical radiation dosimeters.

For More Information Circle No. 798




An affordable **3D mouse** for CAD applications has been introduced by Multipoint Technology Corp., Westford, MA. The MULTIPOINT Z™ mouse integrates the features of a conventional mouse with an innovative 3-axis trackball and Z thumbwheel to provide six degrees of freedom for easy manipulation of 3D CAD images.

For More Information Circle No. 794



Olflex Wire & Cable Inc., Fairfield, NJ, has announced ROBOT 900, a multiconductor, elastomeric-insulated **cable** designed for use in severe torsional applications. The cable features unique stranding and a specially-formulated polyurethane jacket for increased mechanical protection and resistance to mineral and synthetic oils.

For More Information Circle No. 792




Finisar Corp., Menlo Park, CA, has applied innovative laser physics technology in the development of the first practical gigabit-rate **data communications links** that run over multimode fiber. Utilizing ordinary CD lasers, the components allow designers to build network adapters that can transmit data up to 1.5 Gbits/sec. for under \$1000 with low bit error rates, thereby enabling ultra-high-performance configurations never before economical.

For More Information Circle No. 796

The latest version of SmartCAM Advanced Fabrication™ from Point Control Co., Eugene, OR, is designed to **model and optimize CNC manufacturing processes** for turret punch presses and plasma, laser, and waterjet cutters. The software replaces traditional CNC programming procedures with interactive modeling techniques, allowing the user to swiftly create, optimize, and alter CNC processes.

For More Information Circle No. 790



ScanTech Corp., Breckenridge, CO, has developed a patented **sensing technology** that can see through nonferrous housings such as plastic, aluminum, brass, and titanium to monitor the motion and position of internal components. The technology, which is incorporated into ScanTech's MDS-750 series sensors, uses standard data acquisition methods and requires no human intervention, complex computer algorithms, or special lighting.

For More Information Circle No. 788

New on the Market

The Starburst™, a unique high-resolution **printer** introduced by Laser-technics, Albuquerque, NM, can produce either continuous-tone images using dye diffusion thermal transfer or dithered images using thermal wax transfer. It can also generate black and white prints or transparencies in both modes and is PostScript-compatible. The Starburst has application in CAD/CAM, presentation graphics, environmental sciences, industrial design, and medical imaging.

For More Information Circle No. 776

A credit-card-size, solid-state **camera** for monitoring industrial and scientific tasks has been introduced by Marshall Electronics Inc., Culver City, CA. The monochrome video camera has a wide-angle lens, 1/3" sensor, 240-line resolution, and auto-electronic light adjustment. Small enough to be hidden in walls, built into machines, or mounted on enclosures, the Model V-1203 camera is suitable for remote monitoring of toxic or dangerous environments and wherever visibility is impeded.

For More Information Circle No. 780

The MathWorks Inc., Natick, MA, has announced a Windows version of SIMULINK (previously known as SIMULAB), its highly-interactive **CAE tool** for simulation of nonlinear dynamic systems. SIMULINK can be used to model real-world, time-varying systems in electrical, mechanical, chemical, aerospace, and automotive engineering applications.

For More Information Circle No. 782



LABTECH, Wilmington, MA, has announced real-time multitasking for Windows with its **NOTEBOOK** and **NOTEBOOK/XE software**. A user can collect data, display it in real time, simultaneously log the data to a disk, and perform triggering and control decisions based on the data. Since they provide gap-free sampling, both programs are suitable for applications where I/O points must be monitored and updated continuously.


For More Information Circle No. 774

Engis Corp., Wheeling, IL, has developed a quick two-step process for **scratch-free, stress-free finishes on advanced ceramic parts**. Titanium-carbides, 95%+ alumina ceramics, aluminum oxide-titanium carbides, and silicon require such finishes for electronics and other high-tech applications. The process, which reduces cycle times by half, utilizes a micron-size diamond slurry to establish surface flatness and a colloidal polish to prevent scratches.

For More Information Circle No. 784

Haydon Switch and Instrument Inc., Waterbury, CT, reports that patented technology used in its 6200 series switch has quadrupled the life expectancy of **sealed switches** to more than 100,000 cycles. Employing a one-piece switch blade and special alloy contacts, the switches are available with several contact materials to accommodate high current and/or low current and with a choice of actuators and electrical terminations.

For More Information Circle No. 778



Cyberware, Monterey, CA, has introduced a **3D scanner** that offers 75 points/inch resolution to capture minute details of an object's shape and color. Images are captured in 13 seconds without touching the object and displayed instantly on a graphics workstation. Dubbed the 3030/HIREZ, the scanner enables novel applications in such fields as package modeling, reconstructive surgery, and medical appliance design. Researchers can study highly-accurate 3D images of fragile objects rather than the objects themselves.

For More Information Circle No. 772

ANVIL CASES... BUILT FOR AIR, LAND & SEA

• **M.A.C.C. Cases** - military application cases and containers meet or exceed the stringent testing of MIL-STD-810

• **A.T.A. Cases** meet or exceed the Air Transport Association specification 300 Category 1 standards



CALL FOR OUR NEW CATALOG!

• Custom measuring and designing available • Building quality cases since 1952

Call Today For More Information

ANVIL CASES
SUBSIDIARY OF ZERO CORPORATION


15650 Salt Lake Ave., City of Industry, CA 91745 • P.O. Box 1202, La Puente, CA 91747

(800) FLY-ANVIL (800) 359-2684

For More Information Circle No. 650

Thermofoil™ Heater/Sensors

FORM

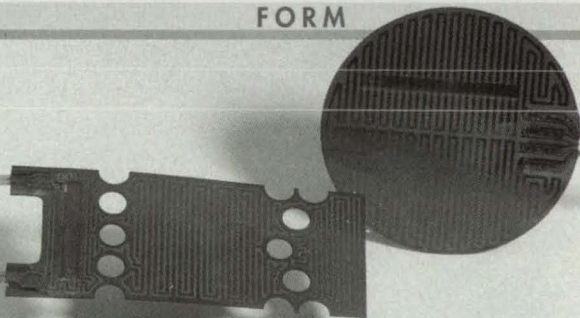

FIT

Medical diagnostic instrumentation • Aerospace devices

FUNCTION

Flexible heaters have their own built-in temperature sensors for fast response and tight control.

- Kapton, silicone rubber, polyester insulation
- Resistance thermometers with platinum and other elements, thermocouples, and thermistors
- Irregular shapes and profiled heat patterns adapt to any heat sink

7300 Commerce Ln.
Minneapolis, MN
55432-3177 USA

MINCO
PRODUCTS, INC.

Phn: 612/571-3121
Telex: 687-9025
FAX: 612/571-0927

For More Information Circle No. 541

GUIDE TO NOISE CONTROL. FREE.



This brochure gives you detailed information about the industry's finest noise killers—SONEX acoustical sheets, baffles and ceiling tiles. For your free copy, use the reader service number below. Or call this number toll-free today. **1-800-662-0032.**

illbruck

© 1991, illbruck, inc.

For More Information Circle No. 466


Columbus to Columbia 1492—1992 T-Shirt



This T-shirt design says it all—500 YEARS OF FREEDOM IN AMERICA. The Santa Maria sailing on the ocean against a burst of golden sun and blue sky. The Columbia shuttle soars in the foreground. In splendid four-color. Only \$12.95

Please send Columbia T-shirts at \$12.95 (quantity) _____
 Circle size(s) S M L XL
 Add \$5.00 for shipping and handling charges _____
 Orders from \$51.00 to \$100.00 add shipping and handling charge \$8.50
 (NY residents all sales tax to total) TOTAL ENCLOSED _____
 Name _____
 Company _____
 Address _____
 City/State/Zip _____
 Mail to: NASA Tech Briefs, Dept. F, 41 East 42nd Street
 New York, New York 10017
 For credit card order call (212) 490-3999

New Literature

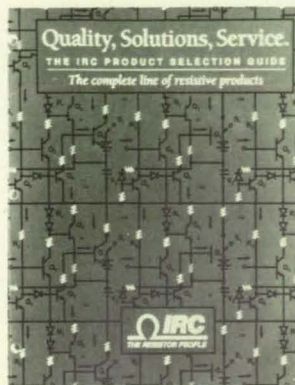

Resistive products are featured in a databook from IRC Inc., Boone, NC. It includes a surface mount cylindrical CHP resistor; TaNFilm surface mount, SIP, and DIP precision resistors and network; and high-voltage precision resistors. Also described are special-purpose products such as line feed resistors for telecommunications, and circuit-protection, current-sensing, and fuse resistors.

For More Information Circle No. 712

Literature from Saguaro Scientific Corp., Tucson, AZ, describes its integrated fiber optics communications and electro-optics instruction kit. Called the Laser Tools and Techniques LF-4310, the kit's 20 labs address basic principles from cutting fiber to use of lock-in amplifiers and interferometers.

For More Information Circle No. 708



Small Parts Inc., Miami Lakes, FL, has published a 272-page catalog of hard-to-find components, materials, and tools for R&D applications. Featured items include hypodermic tubing in 304 or 316 stainless steel in most gauges from six to 33, Teflon tubing in standard and thin wall, shrink Teflon tubing in two shrink ratios, and stainless steel guide wire. New items include stainless steel TORXZ screws in inch and metric sizes and tapered and metric-sized dowel pins.

For More Information Circle No. 704

Auerback Publications, New York, NY, has released *Technology Management: Case Studies in Innovation*, a collection of 34 hands-on case studies analyzing the range of issues that must be addressed for productive, profitable technology development and transfer. Thirty industry experts explain the technology management strategies and techniques used by today's most successful companies.

For More Information Circle No. 710

A 64-page catalog from Analogic Corp., Peabody, MA, describes data acquisition products ranging from those with 12- to 16-bit accuracies at 50 kHz throughput to those providing true 16-bit accuracies at acquisition speeds up to 1 MHz. Many of the acquisition boards contain analog output capabilities, counters, and digital I/O. Also featured are expansion, analog output, and signal conditioning boards.

For More Information Circle No. 702



Newport Corp., Fountain Valley, CA, has published a 550-page precision laboratory products catalog highlighting 30 new products, including the Liquid-Crystal Light Control System, the ULTRAlign™ family of stainless steel positioners, optical meters and detectors, and the PMC400 advanced multi-axis motion controller. Fiber optics, electronic instruments, and vibration control table systems are also described.

For More Information Circle No. 714

The new data acquisition catalog from Keithley Instruments Inc., Taunton, MA, includes boards sold under the Keithley MetroByte brand name, Keithley Asyst software, and WORK-HORSE™ industrial acquisition and control products. The 288-page catalog features 24 new products, including the DAS-1600, a 100 ksample/sec analog I/O board with expanded digital and analog output capability, and the 8-channel, 1 MS/s A/D DAS-58 offering simultaneous sample and hold and 1 megaword on-board memory.

For More Information Circle No. 706

Subject Index

A

ACOUSTO-OPTICS
Acousto-optical imaging spectropolarimeter
page 43 GSC-13461

ADA (PROGRAMMING LANGUAGE)
Benchmark Lisp and Ada programs
page 52 ARC-12980
Software for computing selected functions
page 73 ARC-13117

ADHESION TESTS
Tape-smoothing tool for adhesion tests
page 67 MFS-28599

AIR TRAFFIC CONTROL
Air-traffic controllers evaluate the Descent Advisor
page 75 ARC-12622

ANALYSIS (MATHEMATICS)
Curvilinear-interpolation program
page 50 KSC-11497

APPLICATIONS PROGRAMS (COMPUTERS)
Transportable Applications Environment Plus
page 48 GSC-13277/78

ATTITUDE (INCLINATION)
GPS measurement of attitude
page 34 NPO-17937

AZEOTROPES
Nearly azeotropic mixtures to replace refrigerant 12
page 46 NPO-18030

B

BALL BEARINGS
Bearing cartridge designed to reduce wear
page 59 MFS-29807

BALLOON-BORNE INSTRUMENTS
Balloon-borne system would aim instrument toward sun
page 32 MFS-28519

BLADE TIPS
Helicopter rotor blade with free tip
page 62 ARC-12151

C

CARRIER TO NOISE RATIOS
Effects of phase jitter on lock detection in QPSK
page 39 NPO-18208

CARTRIDGES
Bearing cartridge designed to reduce wear
page 59 MFS-29807

CERAMIC FIBERS
Making crystal filaments from extruded ceramic rods
page 68 LEW-14921

CIRCUITS
Capacitive proximity sensor has longer range
page 22 GSC-13377

CIRCUMFERENCES
Measuring large circumferences more precisely
page 56 MFS-28564

COMBUSTION PRODUCTS
Soot-free combustion of methane and LNG
page 45 MFS-28561

COMPUTATIONAL FLUID DYNAMICS
CFD simulations of sonic booms in near and mid fields
page 58 ARC-12855

COMPUTER ANIMATION
Improved depiction of computed unsteady flows
page 54 ARC-12677

COMPUTER SYSTEMS PERFORMANCE
Benchmark Lisp and Ada programs
page 52 ARC-12980

COORDINATE TRANSFORMATIONS
Recognizing patterns in log-polar coordinates
page 71 MSC-21758

CURING
Monitoring polymer curing via electromagnetic impedance
page 44 LAR-13802

D

DATA ACQUISITION
Program handles environmental-test data
page 51 NPO-18508

DATA ANALYSIS
Program for logarithmic interpolation of test data
page 51 MFS-28551

DIFFERENTIAL EQUATIONS
Spurious solutions of nonlinear differential equations
page 72 ARC-12770

DIRECTIONAL COUPLERS
Obtaining patterns of holes in directional couplers
page 69 NPO-18454

DOPPLER EFFECT
Using spectral edge to measure Doppler shift
page 38 GSC-13343

E

ELECTRIC POWER TRANSMISSION
Transmission of power via combined laser beams
page 34 LAR-14389

ELECTRICAL IMPEDANCE
Monitoring polymer curing via electromagnetic impedance
page 44 LAR-13802

ELECTRODEPOSITION
Vacuum plasma spraying replaces electrodeposition
page 63 MFS-28569

END EFFECTORS
Dual-roll robotic wrist-joint assembly
page 59 GSC-13307

ENGINE MONITORING INSTRUMENTS
Computer jet-engine-monitoring system
page 35 ARC-12776

ENVIRONMENTAL TESTS
Program handles environmental-test data
page 51 NPO-18508

EXTERNAL TANKS
Lunar habitat would be assembled in space
page 70 LAR-14234

F

FAILURE ANALYSIS
Program models propagation of failures
page 50 MSC-21860

FAULT TREES
Program models propagation of failures
page 50 MSC-21860

FEEDBACK CONTROL
Studies of positive-position-feedback control
page 57 NPO-18074

FINES
Removing undesired fine powder from silicon reactor
page 47 NPO-18323

FLIGHT INSTRUMENTS
Computer jet-engine-monitoring system
page 35 ARC-12776

FLIGHT MANAGEMENT SYSTEMS
Air-traffic controllers evaluate the Descent Advisor
page 75 ARC-12622

FLUID DYNAMICS
Improved depiction of computed unsteady flows
page 54 ARC-12677

FLUIDIZED BED PROCESSORS
Removing undesired fine powder from silicon reactor
page 47 NPO-18323

FLUOROHYDRO-CARBONS
Nearly azeotropic mixtures to replace refrigerant 12
page 46 NPO-18030

FRAMES (DATA PROCESSING)
Software operates on bit-map images
page 52 ARC-12830

FREQUENCY MULTIPLIERS
Barrier/nin+ varactor frequency multipliers
page 28 NPO-18428

FUEL INJECTION
Tangential-entry injector with internal reed valve
page 56 MFS-28547

FUNCTIONS (MATHEMATICS)
Software for computing selected functions
page 73 ARC-13117

G

GAS TUNGSTEN ARC WELDING
Ultrasonic probe for in situ inspection of welds
page 63 MFS-29842

GEODETIC SATELLITES
Physical models in GPSOMC software
page 45 NPO-18241

GLOBAL POSITIONING SYSTEM
GPS measurement of attitude
page 34 NPO-17937

PHYSICAL MODELS IN GPSOMC SOFTWARE
page 45 NPO-18241

GRAVITATIONAL EFFECTS
Paraboloidal reflector with movable subreflector
page 22 NPO-18442

GROUND BASED CONTROL
Air-traffic controllers evaluate the Descent Advisor
page 75 ARC-12622

H

HEAT TRANSFER
Simple, lightweight, thermomechanical coupling
page 53 GSC-13251

HELICOPTER DESIGN
Helicopter rotor blade with free tip
page 62 ARC-12151

HELICOPTERS
Detection and avoidance of obstacles by helicopters
page 40 ARC-12825

HIGH POWER LASERS
Transmission of power via combined laser beams
page 34 LAR-14389

HIGH TEMPERATURE SUPERCONDUCTORS
Equations for designing superconducting transmission lines
page 30 NPO-18418

HOLE DISTRIBUTION (MECHANICS)
Obtaining patterns of holes in directional couplers
page 69 NPO-18454

HUMAN FACTORS ENGINEERING
Transportable Applications Environment Plus
page 48 GSC-13277/78

HYDROCARBON COMBUSTION
Soot-free combustion of methane and LNG
page 45 MFS-28561

HYDROGEN
Measuring hydrogen plumes with Raman lidar
page 41 KSC-11459

HYDROPONICS
Efflux of nitrate from hydroponically grown wheat
page 74 ARC-12628

IMAGE PROCESSING
Software operates on bit-map images
page 52 ARC-12830

IMAGING SPECTROMETERS
Acousto-optical imaging spectropolarimeter
page 43 GSC-13461

IMPEDANCE MEASUREMENT
Monitoring polymer curing via electromagnetic impedance
page 44 LAR-13802

INJECTORS
Tangential-entry injector with internal reed valve
page 56 MFS-28547

INTERPOLATION
Curvilinear-interpolation program
page 50 KSC-11497

JOINTS (JUNCTIONS)
Dual-roll robotic wrist-joint assembly
page 59 GSC-13307

JET ENGINES
Computer jet-engine-monitoring system
page 35 ARC-12776

JOINTS (JUNCTIONS)
Dual-roll robotic wrist-joint assembly
page 59 GSC-13307

JOINTS (JUNCTIONS)
Dual-roll robotic wrist-joint assembly
page 59 GSC-13307

JOINTS (JUNCTIONS)
Dual-roll robotic wrist-joint assembly
page 59 GSC-13307

JOINTS (JUNCTIONS)
Dual-roll robotic wrist-joint assembly
page 59 GSC-13307

JOINTS (JUNCTIONS)
Dual-roll robotic wrist-joint assembly
page 59 GSC-13307

JOINTS (JUNCTIONS)
Dual-roll robotic wrist-joint assembly
page 59 GSC-13307

JOINTS (JUNCTIONS)
Dual-roll robotic wrist-joint assembly
page 59 GSC-13307

JOINTS (JUNCTIONS)
Dual-roll robotic wrist-joint assembly
page 59 GSC-13307

IMPEDANCE MEASUREMENT
Monitoring polymer curing via electromagnetic impedance
page 44 LAR-13802

INJECTORS
Tangential-entry injector with internal reed valve
page 56 MFS-28547

INTERPOLATION
Curvilinear-interpolation program
page 50 KSC-11497

JOINTS (JUNCTIONS)
Dual-roll robotic wrist-joint assembly
page 59 GSC-13307

JET ENGINES
Computer jet-engine-monitoring system
page 35 ARC-12776

JOINTS (JUNCTIONS)
Dual-roll robotic wrist-joint assembly
page 59 GSC-13307

JOINTS (JUNCTIONS)
Dual-roll robotic wrist-joint assembly
page 59 GSC-13307

JOINTS (JUNCTIONS)
Dual-roll robotic wrist-joint assembly
page 59 GSC-13307

JOINTS (JUNCTIONS)
Dual-roll robotic wrist-joint assembly
page 59 GSC-13307

JOINTS (JUNCTIONS)
Dual-roll robotic wrist-joint assembly
page 59 GSC-13307

JOINTS (JUNCTIONS)
Dual-roll robotic wrist-joint assembly
page 59 GSC-13307

JOINTS (JUNCTIONS)
Dual-roll robotic wrist-joint assembly
page 59 GSC-13307

JOINTS (JUNCTIONS)
Dual-roll robotic wrist-joint assembly
page 59 GSC-13307

JOINTS (JUNCTIONS)
Dual-roll robotic wrist-joint assembly
page 59 GSC-13307

JOINTS (JUNCTIONS)
Dual-roll robotic wrist-joint assembly
page 59 GSC-13307

JOINTS (JUNCTIONS)
Dual-roll robotic wrist-joint assembly
page 59 GSC-13307

JOINTS (JUNCTIONS)
Dual-roll robotic wrist-joint assembly
page 59 GSC-13307

JOINTS (JUNCTIONS)
Dual-roll robotic wrist-joint assembly
page 59 GSC-13307

JOINTS (JUNCTIONS)
Dual-roll robotic wrist-joint assembly
page 59 GSC-13307

JOINTS (JUNCTIONS)
Dual-roll robotic wrist-joint assembly
page 59 GSC-13307

JOINTS (JUNCTIONS)
Dual-roll robotic wrist-joint assembly
page 59 GSC-13307

LIGHT EMITTING DIODES
Determining extinction ratio of a laser diode
page 26 GSC-13413

LINEAR PROGRAMMING
Software for integer programming
page 50 MFS-27260

LISP (PROGRAMMING LANGUAGE)
Benchmark Lisp and Ada programs
page 52 ARC-12980

LOGARITHMS
Program for logarithmic interpolation of test data
page 51 MFS-28551

LUNAR SHELTERS
Lunar habitat would be assembled in space
page 70 LAR-14234

M

MAN-COMPUTER INTERFACE
Transportable Applications Environment Plus
page 48 GSC-13277/78

MANIPULATORS
Dual-roll robotic wrist-joint assembly
page 59 GSC-13307

MAPS
Software operates on bit-map images
page 52 ARC-12830

MATHEMATICAL MODELS
Physical models in GPSOMC software
page 45 NPO-18241

MATHEMATICAL PROGRAMMING
Software for integer programming
page 50 MFS-27260

MEASURING INSTRUMENTS
Measuring large circumferences more precisely
page 56 MFS-28564

METAL FIBERS
Making crystal filaments from extruded ceramic rods
page 68 LEW-14921

MICROWAVE CIRCUITS
Equations for designing superconducting transmission lines
page 30 NPO-18418

MICROWAVE COUPLING
Obtaining patterns of holes in directional couplers
page 69 NPO-18454

MICROWAVES
Solid-state power amplifier for 61.5 GHz
page 31 GSC-13465

MILLIMETER WAVES
Barrier/nin+ varactor frequency multipliers
page 28 NPO-18428

MOLECULAR SPECTROSCOPY
Improved Raman-emission detector
page 41 KSC-11521

(Continued on page 82)

From NASA Tech Briefs

A T-SHIRT WARDROBE

Dreams To Reality—a striking design in full-color. Featuring blueprints of the National Aero-Space Plane and Space Station Freedom with a shuttle liftoff saluting America's space achievements. Price \$12.95



Endeavor-Commemorate the Maiden Voyage of NASA's new space shuttle! The ship stands out against the sun, the earth, and the stars. All in full color. Colorfully printed words "MAIDEN VOYAGE" appear in red and skyblue. Price \$12.95

Please send:

Dreams To Reality T Shirts @ \$12.95 each

in size(s): S M L XL

Endeavor T shirts @ \$12.95 each

in size(s): S M L XL

Orders up to \$50.00 add shipping and handling charge—\$5.00

Orders \$51.00 to \$100.00 add shipping and handling charge—\$8.50

NY residents add sales tax to total

Grand Total

Name

Company

Address

City/State/Zip

Send payment to:

NASA Tech Briefs, Dept. F, 41 E. 42nd St., #921, NY, NY 10017
For Credit Card orders call: 212-490-3999

More than 500 pages of tooling components!

FREE!




This illustrated complete line catalog includes component parts for jigs and fixtures, chuck jaws, plug gauges, threaded inserts, stainless steel tooling components, toggle clamps, SWIFTSURE power workholding devices, drill jig bushings, locking pins, and modular fixturing. Completely illustrated. Send for your free copy.



MANUFACTURING CO.
4200 Carr Lane CL, P.O. Box 191970
St. Louis, Missouri 63119-0190
Phone: 314-647-6200, FAX: 314-647-6736

For More Information Circle No. 390

THE EASY CHOICE



Micro-Link's VME203 SBC makes your design choice easy. Available in several configurations, VME203 prices start at less than \$1,025 in 100 piece quantities. Options include 68EC030 or 68030, FPU, 1 or 4 MB of DRAM with transparent refresh, burst mode Cache, up to 1 MB of EPROM, two RS-232 serial ports, and clock speeds of 16, 32 and 40 MHz. VME203 software support includes Microware OS-9®, CrossCode® C FreeForm™ and Microbug II.

Micro-Link
Call For Your Free Configuration Guide:
1-800-428-6155 US & Canada
1-317-846-1721 International

For More Information Circle No. 329

Fuzzy Logic

CubiCalc® MS Windows-based tool for non-programmers

Simulate system response using built-in expression interpreter or apply fuzzy rules to file data Plot results or log numerically

CubiCalc RTC for programmers includes run-time compiler and deployable modules

Also available...
The OWL Neural Network Library

HyperLogic Corporation

1855 East Valley Parkway, Suite 210
Escondido, California 92027
Tel 619/746-2765 Fax 619/746-4089

For More Information Circle No. 404

FREE!


106-PAGE CATALOG describing industry's most complete line of optical metrology and viewing instruments.



Complete information on x-y tables, microfinishing equipment, toolmakers microscopes, stereo microscopes, alignment microscopes, monocular zoom microscopes, micro telescopes, pocket microscopes, borescopes and mini borescopes, fibre optic and miniature illumination systems. Also described are centering microscopes and projectors, alignment microscopes, optical cutting tool geometry analyzers, depth and x-y axis measuring microscopes.

TITAN TOOL SUPPLY CO., INC.
68 Comet Ave., Buffalo, NY 14216-9985
Phone: (716) 874-0073 Fax: (716) 873-9996

For More Information Circle No. 595

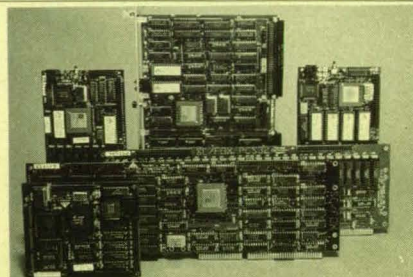

SC/FOX™ Embedded-System Computers

SC/FOX VME SBC (Single Board Computer) 18 MIPS, 60 MIPS burst, general-purpose, slot-1 Master/Slave System Controller. Up to 640K bytes 0-ws memory, 1 SCSI, 1 ptr, 2 serial ports. Uses 16-bit Harris RTX 2000.

SC/FOX PCS (Parallel Coprocessor System) 15 MIPS, 50 MIPS burst, general purpose PC/AT/386 plug-in board, 32K to 1M byte 0-ws static memory, multiple PCS operation, SCSI option. Uses Harris RTX 2000.

SC/FOX SBC (Single Board Computer) 18 MIPS, 60 MIPS burst, Stand-alone operation, Eurocard size, 1 ptr, 1 serial port, up to 512K bytes 0-ws memory, 2 50-pin user connectors, SCSI option. Uses Harris RTX 2000.

SC/FOX PCS32 (Parallel Coprocessor System 32) 15 MIPS to 70 MIPS, general-purpose PC/AT/386 32-bit plug-in board with 64K to 1M byte 0-ws static memory. Uses 32-bit SC32 Forth microprocessor.

Ideal for embedded real-time control, data acquisition, or high-speed processing. Forth software included, C optional. OEM pricing.

SILICON COMPOSERS INC (415) 322-8763
208 California Ave., Palo Alto, CA 94306

For More Information Circle No. 488




FREE! 130 Page Catalog -----
"Optics for Industry"

Free 130 page product catalog from Rolynd, world's largest supplier of "Off-the-Shelf" optics. 24-hour delivery of simple or compound lenses, filters, prisms, mirrors, beamsplitters, reticles, objectives, eyepieces plus thousands of other stock items. Rolynd also supplies custom products and coatings in prototype or production quantities. **ROLYND OPTICS Co., 706 Arrowgrand Circle, Covina, CA 91722-2199, (818)915-5707, FAX (818)915-1379**

For More Information Circle No. 411

VGA TO VIDEO SCAN CONVERTER

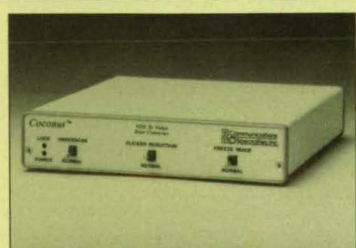

COCONUT™


■ Smallest, software-free scan converter available ■ Converts VGA to Composite, RGB and S-Video ■ Flicker-free ■ NTSC, PAL & Universal AC Supply Standard ■ Only \$1595., 1 year warranty

☒ Communications
☒ Specialties, Inc.

TEL: 516-273-0404 FAX: 516-273-1638

For More Information Circle No. 347

Intelligent Data Acquisition



Microstar Laboratories Data Acquisition Processor™ has on-board intelligence: a real-time software environment for quick development and fast operation. It runs under DOS, Windows, or OS/2. Learn about this new hardware and software solution from a leader in the field. Free color catalog includes an easy-to-use approach to DSP. Call now — 206-453-2345.

Microstar Laboratories, Inc.
2265 116th Avenue NE
Bellevue, WA 98004
Tel (206) 453-2345
Fax (206) 453-3199

MICROSTAR LABORATORIES™

For More Information Circle No. 450

Official NASA CAPS



Black cap with gold leaves and official NASA insignia. Only \$9.95 each!

Please send (insert quantity) one-size-fits all NASA caps. Add \$5.00 for handling and shipping charges. NY residents add sales tax to total. TOTAL Enclosed: \$ _____

Name _____

Address _____

City _____


State _____ Zip _____

Mail payment to: **Nasa Tech Briefs, Dept. F**
41 East 42nd Street, Suite 921
New York, NY 10017

For credit card order call (212) 490-3999

PC Bus Data Acquisition

...over 50 exciting hardware & software products!



AD1200 only \$359

- 12-bit 125 kHz A/D Conversion
- 16 Analog Input Channels
- 3 Timers and 16 DIO Lines
- Supports DMA and Pacer Clock
- AT Bus Version Available!

A/D, D/A, Digital I/O and Timer/Counters for PC XT and AT computers • 12-bit A/D rates to 200 kHz! • Eight boards for AMPRO form factor CPUs • 110 VAC relay, optoisolation, multiplexer and thermocouple boards • DSP and data acquisition software • Request your **FREE 80 page catalog today!**

Real Time Devices, Inc.
State College, PA USA

Tel.: 814/234-8087 • FAX: 814/234-5218

For More Information Circle No. 452

An Innovative Approach to Attaining "World Class Manufacturing Business Performance"



Author Gunn puts forward a new nine-step approach to developing and implementing a future oriented manufacturing strategy. From the computer-integrated enterprise to the open-ended quest for quality, Gunn's program reflects a breadth of vision his experience has brought him.

Only \$28.00 plus \$5.00 for shipping and handling. NY residents add sales tax to total.

Mail your order to:

NASA Tech Briefs, Dept. F,
41 East 42nd St., #921
New York, NY 10017

For credit card orders call (212) 490-3999

Real-Time Network

The SCRAMNet™ Network combines the real-time speed of replicated shared memory with the flexibility of a fiber optic LAN to get microsecond response from multi-vendor computers. It offers distinct advantages in critical simulations. Brochure highlights system's features.




Systran Corp., 4126 Linden Avenue, Dayton, OH 45432-3068 USA.
Phone (513) 252-5601 or 1-800-252-5601.

For More Information Circle No. 432

LASER DIODE DRIVERS

HIGH SPEED HIGH POWER



Avtech offers over 80 different fast laser diode drivers. See our free 113-page general catalog for:


- Peak currents from 100 mA to 500 Amps
- Pulse widths from 200 ps to 1 ms
- Rise times as low as 100 ps
- Plug-in diode bias insertion units
- Lab instrument or miniature module format
- 250 other fast pulse generators, amplifiers, samplers, transformers and fast pulse accessories

AVTECH
ELECTROSYSTEMS

P.O. Box 265, Ogdensburg
New York 13669
(315) 472-5270
P.O. Box 5120, Station F
Ottawa, Canada K2C 3H4
(613) 226-5772
Fax: (613) 226-2802

For More Information Circle No. 310

CAD/CAM Tooling Component Library

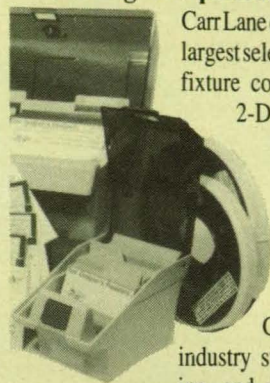


Carr Lane offers the world's largest selection of jig-and-fixture components. This 2-D or 3-D CAD/CAM library is compatible with most popular user formats and workstations. Carr Lane is the industry standard in tooling, and right now we're offering special limited-time low pricing.

Carr Lane MANUFACTURING CO.
4300 Carr Lane Ct., P.O. Box 191970
St. Louis, Missouri 63119
Phone: 314-647-6200, FAX: 314-647-9726

For More Information Circle No. 386

ETCHED FOIL HEATERS AND SENSORS



RdF introduces new lower cost industrial Micro-Foil Heat Flow Sensor for precise measurement of heat transfer (loss or gain) through any surface material. A self-generating thermopile transducer, the heat sensor doesn't require special wiring, reference junctions or signal conditioning. Sensors connect to any direct-reading dc mV meter or recorder.

RdF's complete line of Foil Products include flexible, etched foil heating elements, custom sensors, foil thermocouples and foil RTDs. RdF's small or large size, low weight, and long life foil products can be applied to flat or curved surfaces.

RdF 23 Elm Avenue, P.O. Box 490
Hudson, NH 03051-0490
Tel: (603) 882-5195 FAX: (603) 882-6925.

For More Information Circle No. 551

SILICON VIDEO® MUX™ Flexible Frame Grabber For The PC/AT

- 8 to 8000 pixels per line
- 2 to 40 MHz sampling/display rate
- 2 to 1020 lines per field
- 1 or 4 Mbytes of Reconfigurable Image Memory
- Standard/Nonstandard Video Acquisition
- 6 Input Video Multiplexer
- CT, MR video capture
- Interface to high-resolution CCD cameras
- Extensive libraries and menu driven software

EPiX®

3005 MacArthur Blvd., Northbrook, IL 60062
708-498-4002 FAX: 708-498-4321

For More Information Circle No. 675

monarch



\$99 each

SIGLAB Signal Lab
Digital Filter Design
DSP μ P Code Generators


DSP Software
(800) 741-7440

The Athena Group, Inc.
3424 N.W. 31st Street, Gainesville, FL 32605 USA
Tel: (904) 371-2567 FAX: (904) 373-5182
Export pricing higher

For More Information Circle No. 319

MICROCONTROLLERS

- C Programmable
- Data Acquisition
- Control / Test
- Excellent Support
- From \$159 Qty 1
- New Keyboard Display Modules



Use our **Little Giant™** and **Tiny Giant™** miniature controllers to computerize your product, plant or test department. Features built-in power supply, digital I/O to 48+ lines, serial I/O (RS232 / RS485), A/D converters to 20 bits, solenoid drivers, time of day clock, battery backed memory, watchdog, field wiring connectors, up to 8 X 40 LCD with graphics, and more! Our \$195 interactive **Dynamic C™** makes serious software development easy. You're only one phone call away from a total solution.

Z-World Engineering

1724 Picasso Ave., Davis, CA 95616
(916) 757-3737 Fax: (916) 753-5141
Automatic Fax: (916) 753-0618
(Call from your fax, request catalog #18)

For More Information Circle No. 519

N

NAP-OF-THE-EARTH NAVIGATION
Detection and avoidance of obstacles by helicopters
page 40 ARC-12825

NAVIGATION
GPS measurement of altitude
page 34 NPO-17937

NITRATES
Efflux of nitrate from hydroponically grown wheat
page 74 ARC-12628

NONLINEAR EQUATIONS
Spurious solutions of nonlinear differential equations
page 72 ARC-12770

NUMERICAL ANALYSIS
Curvilinear-interpolation program
page 50 KSC-11497
Spurious solutions of nonlinear differential equations
page 72 ARC-12770

O

OBSTACLE AVOIDANCE
Detection and avoidance of obstacles by helicopters
page 40 ARC-12825

OPTICAL RADAR
Measuring hydrogen plumes with Raman lidar
page 41 KSC-11459
Using spectral edge to measure Doppler shift
page 38 GSC-13343

OPTIMIZATION
Software for integer programming
page 50 MFS-27260

OSCILLATORS
Capacitive proximity sensor has longer range
page 22 GSC-13377

OZONOSPHERE
Nearly azotropic mixtures to replace refrigerant 12
page 46 NPO-18030

P

PAINTS
Tape-smoothing tool for adhesion tests
page 67 MFS-28599

PARABOLIC REFLECTORS
Paraboloidal reflector with movable subreflector
page 22 NPO-18442

PATTERN RECOGNITION
Recognizing patterns in log-polar coordinates
page 71 MSC-21758

PERFORMANCE TESTS
Benchmark Lisp and Ada programs
page 52 ARC-12980

PHASE SHIFT KEYING
Effects of phase jitter on lock detection in QPSK
page 39 NPO-18208

PHOTACOUSTIC SPECTROSCOPY
Acousto-optical imaging spectropolarimeter
page 43 GSC-13461

PITOT TUBES
Measuring streamwise momentum and cross-stream turbulence
page 53 ARC-11934

PLASMA SPRAYING
Vacuum plasma spraying replaces electrodeposition
page 63 MFS-28569

POINTING CONTROL SYSTEMS
Ballon-borne system would aim instrument toward sun
page 32 MFS-28519

POLARIMETERS
Acousto-optical imaging spectropolarimeter
page 43 GSC-13461

POSITIVE FEEDBACK
Studies of positive-position-feedback control
page 57 NPO-18074

POWER AMPLIFIERS
Solid-state power amplifier for 61.5 GHz
page 31 GSC-13465

PROXIMITY
Capacitive proximity sensor has longer range
page 22 GSC-13377

PULSED LASERS
Determining extinction ratio of a laser diode
page 26 GSC-13413

R

RADIO ANTENNAS
Paraboloidal reflector with movable subreflector
page 22 NPO-18442

RADIO SIGNALS
Effects of phase jitter on lock detection in QPSK
page 39 NPO-18208

RAMAN SPECTROSCOPY
Improved Raman-emission detector
page 41 KSC-11521
Measuring hydrogen plumes with Raman lidar
page 41 KSC-11459

REFRIGERANTS
Nearly azotropic mixtures to replace refrigerant 12
page 46 NPO-18030

REFRIGERATORS
Improved regenerative sorbent-compressor refrigerator
page 61 NPO-18211

REGENERATIVE COOLING
Improved regenerative sorbent-compressor refrigerator
page 61 NPO-18211

RISK
Program models propagation of failures
page 50 MSC-21860

ROBOTICS
Capacitive proximity sensor has longer range
page 22 GSC-13377

ROTARY WINGS
Helicopter rotor blade with free tip
page 62 ARC-12151

S

SHAPE MEMORY ALLOYS
Simple, lightweight, thermomechanical coupling
page 53 GSC-13251

SILICON
Removing undesired fine powder from silicon reactor
page 47 NPO-18323

SINGLE CRYSTALS
Making crystal filaments from extruded ceramic rods
page 68 LEW-14921

SONIC BOOMS
CFD simulations of sonic booms in near and mid fields
page 58 ARC-12855

SOOT
Soot-free combustion of methane and LNG
page 45 MFS-28561

SORPTION
Improved regenerative sorbent-compressor refrigerator
page 61 NPO-18211

SPACE HABITATS
Lunar habitat would be assembled in space
page 70 LAR-14234

SPECTROSCOPY
Improved Raman-emission detector
page 41 KSC-11521

SUBMILLIMETER WAVES
Barrier/in/n+ varactor frequency multipliers
page 28 NPO-18428

SUBREFLECTORS
Paraboloidal reflector with movable subreflector
page 22 NPO-18442

SUBSONIC FLOW
Measuring streamwise momentum and cross-stream turbulence
page 53 ARC-11934

SUN
Ballon-borne system would aim instrument toward sun
page 32 MFS-28519

SUPERSONIC FLOW
CFD simulations of sonic booms in near and mid fields
page 58 ARC-12855

T

TEST FACILITIES
Program handles environmental test data
page 51 NPO-18508

THERMOSETTING RESINS
Monitoring polymer curing via electromagnetic impedance
page 44 LAR-13802

THERMOSTATS
Simple, lightweight, thermomechanical coupling
page 53 GSC-13251

TOOLS
Tape-smoothing tool for adhesion tests
page 67 MFS-28599

TRANSCENDENTAL FUNCTIONS
Software for computing selected functions
page 73 ARC-13117

TRANSFORMATIONS (MATHEMATICS)
Recognizing patterns in log-polar coordinates
page 71 MSC-21758

TRANSISTOR AMPLIFIERS
Solid-state power amplifier for 61.5 GHz
page 31 GSC-13465

TRANSMISSION LINES
Equations for designing superconducting transmission lines
page 30 NPO-18418

TRAVELING WAVE AMPLIFIERS
Solid-state power amplifier for 61.5 GHz
page 31 GSC-13465

TURBINE PUMPS
Bearing cartridge designed to reduce wear
page 59 MFS-29807

TURBULENCE METERS
Measuring streamwise momentum and cross-stream turbulence
page 53 ARC-11934

U

ULTRASONIC TESTS
Ultrasonic probe for in situ inspection of welds
page 63 MFS-29842

UNSTEADY FLOW
Improved depiction of computed unsteady flows
page 54 ARC-12677

V

VACUUM DEPOSITION
Vacuum plasma spraying replaces electrodeposition
page 63 MFS-28569

VALVES
Tangential-entry injector with internal reed valve
page 56 MFS-28547

VARACTOR DIODES
Barrier/in/n+ varactor frequency multipliers
page 28 NPO-18428

VIBRATION DAMPING
Studies of positive-position-feedback control
page 57 NPO-18074

W

WELD TESTS
Ultrasonic probe for in situ inspection of welds
page 63 MFS-29842

WHEAT
Efflux of nitrate from hydroponically grown wheat
page 74 ARC-12628

X

X-29 AIRCRAFT
Computer jet-engine monitoring system
page 35 ARC-12776

ADVERTISERS INDEX

3M Electrical Specialties Division	(RAC 436)*	67
Algor Interactive Systems, Inc.	(RAC 449)	44
Amco Engineering Company	(RAC 500)	61
Anvil Cases	(RAC 650)	77
Apex Microtechnology Corp.	(RAC 585)	28
Apollo Commemorative Posters		46
Astro-Med, Inc.	(RAC 602)	2
Autodesk, Inc.	(RAC 504.420)	1.68
Avtech Electrosystems	(RAC 310)	81
Battery Engineering, Inc.	(RAC 486)	51
Carr Lane Manufacturing Co.	(RAC 390.386)	80.81
Communications Specialties, Inc.	(RAC 347)	80
Contemporary Cybernetics Group	(RAC 322)	COV II
Cyber Research, Inc.	(RAC 360-375)	33
Datum, Inc.	(RAC 586)	16
Edge Technologies, Inc.	(RAC 592)	64
EPIX, Inc.	(RAC 675)	81
Fluoramics, Inc.	(RAC 315)	48
Folsom Research	(RAC 540)	39
Gage Applied Sciences, Inc.	(RAC 306)	57
Gould, Inc., Test and Measurement Group	(RAC 484)	13
Graphite Metallizing Corp.	(RAC 392)	76
Hardigg Cases	(RAC 491)	35
Houston Instrument	(RAC 550)	21
Hughes Aircraft Company		9
Hyperception, Inc.	(RAC 405)	COV IV
HyperLogic Corporation	(RAC 404)	80
Illbruck, Inc.	(RAC 466)	78
INCO Specialty Powder Products	(RAC 652)	37
Information Handling Services	(RAC 546)	23
Integrated Systems, Inc.	(RAC 343)	49
Jandel Scientific	(RAC 630-635)	19
Kaiser Electroprecision	(RAC 327)	31
Kaman Instrumentation Corp.	(RAC 492)	47
Keithley Metrabyte	(RAC 419)	5
MACSYMA/SYMBOLICS	(RAC 313)	73
Magtrol, Inc.	(RAC 308)	42
Master Bond, Inc.	(RAC 444)	74
MathSoft, Inc.	(RAC 421)	29
Micro-Link Products	(RAC 329)	80
Microstar Laboratories	(RAC 450)	80
Minco Products, Inc.	(RAC 541)	77
Modgraph, Inc.	(RAC 435)	45
MTI Instruments	(RAC 337)	74
NASA Calendar		42
NASA Cap		80
NASA T-Shirt (Columbia)		78
NASA T-Shirt Wardrobe		79
National Instruments	(RAC 681)	3
Numerical Algorithms Group	(RAC 428)	36
Patton & Patton Software Corporation	(RAC 499)	69
RdF Corporation	(RAC 551)	81
Real Time Devices, Inc.	(RAC 452)	81
Rexham Industrial	(RAC 521)	64
RGB Spectrum	(RAC 467.469)	10.40
Rolyn Optics Co.	(RAC 411)	80
Silicon Composers, Inc.	(RAC 488)	80
Soft Warehouse, Inc.	(RAC 474)	18
Structural Research & Analysis Corporation	(RAC 446)	58
Systran Corporation	(RAC 432)	81
Technology 2002		24-25
Techron	(RAC 645.671)	4.27
Teledyne Relays	(RAC 517)	75
The Athena Group, Inc.	(RAC 319)	81
The MathWorks, Inc.	(RAC 503)	7
Tiodize Company, Inc.	(RAC 422)	39
Titan Tool Supply Co., Inc.	(RAC 595)	80
Toshiba Information & Imaging Technologies Group	(RAC 558)	11
Velmet, Inc.	(RAC 396)	57
Wolfram Research, Inc.	(RAC 485)	COV III
Zircar Products, Inc.	(RAC 621)	76
Z-World Engineering	(RAC 519)	81

*RAC stands for Reader Action Card. For further information on these advertisers, please circle the RAC number on the Reader Action Card in this issue. This index has been compiled as a service to our readers and advertisers. Every precaution is taken to insure its accuracy, but the publisher assumes no liability for errors or omissions.

Classifieds

Classified advertising rates and specifications are as follows: Set in 6 point light type face, with up to five words at beginning of copy in bold caps. Count box numbers as six words.

50 words or less \$ 240.00
Over 50 words each additional word 2.10
Bold Face words 3.40

Check or money order must accompany order to: Classified Advertising Manager, NASA Tech Briefs, Suite 921, 41 East 42nd Street, New York, NY 10017-5391

SYNCHRONIZE VIDEO RECORDING WITH GPS TIME RECORD VIDEO WITH GPS TIME AND LOCATION

The FP-50/GPS1 generates industry standard SMPTE time-code synchronized to GPS time/date information from your receiver, providing a direct link between recorded video images and GPS time and location stored in your GPS data logger. GPS2 adds continuous multiplexing of GPS position data into the user-bits of the SMPTE time-code. Priced at \$968 and \$1367, complete system also reads and video displays SMPTE time-code, plus RS-232 2-way comm with PC, time-code videotape logging and TC-ToolKit™ programs. Contact HORITA Co., P.O. Box 3993, Mission Viejo, CA 92690 (714) 489-0240

TECHNOLOGY WANTED

Public Transportation Research Group seeks innovative technology to improve the efficiency of rail car and transit bus maintenance operations. Advanced technologies such as robotics and automated test procedures must be proven and cost-effective. Inquiries may be directed to: Transportation Development Corporation, 1201 New York Ave. N.W., Washington, DC, 20005.

NASA Tech Briefs, ISSN 0145-319X, USPS 750-070, copyright © 1992 in U.S. is published monthly by Associated Business Publications Co., Ltd., 41 E. 42nd St., New York, NY 10017-5391. The copyright information does not include the (U.S. rights to) individual tech briefs which are supplied by NASA. Editorial, sales, production and circulation offices at 41 East 42nd Street, New York, NY 10017-5391. Subscription for non-qualified subscribers in the U.S., Panama Canal Zone, and Puerto Rico, \$75.00 for 1 year; \$125.00 for 2 years; \$200.00 for 3 years. Single copies \$10.00. Foreign subscriptions one-year U.S. Funds \$150.00. Remit by check, draft, express orders or VISA, MasterCard, and American Express. Other remittances at sender's risk. Address all communications for subscriptions or circulation to NASA Tech Briefs 41 East 42nd Street, New York, NY 10017-5391. Second-class postage paid at New York, NY and additional mailing offices.

POSTMASTER: please send address changes to NASA Tech Briefs, 41 East 42nd Street, Suite 921, New York, NY 10017-5391

Lynn Purser
Orbital Dynamics Analyst
Huntsville, Alabama

"How I Got Started with *Mathematica*®"

I admit, when I first read about *Mathematica*, I was a little skeptical. I guess mathematicians are like anybody else. Sort of like auto workers being replaced by robots—some mathematicians were skeptical of something that might replace them. So when my firm offered an in-house training seminar on *Mathematica*, I decided to see what all the talk was about.



Photo Courtesy of NASA

That class was fun. I tried to do things beyond what the teacher was covering—the rudimentary stuff about *Mathematica* syntax. I wanted to do animation and play with the graphics. I was taken with the visual dimension of it.

Simulations of the dynamics of the shuttle.




Working on NASA projects, I have to solve problems and present my solutions in a way others can understand. People respond to a visualization better than abstract equations, hand-waving, or scribbling on a blackboard. With *Mathematica*'s graphical capability, especially animation, I can make a dynamic presentation that gives a concrete idea of what I'm talking about.

Then there's the symbolic power. For example, the first project I tackled with *Mathematica* involved a nasty algebraic equation. I solved it on my own and then let *Mathematica* solve it. We both came up with the same answer. But my solution took a few hours and *Mathematica*'s took a few minutes.

Now I use *Mathematica* regularly. I don't think it will ever replace mathematicians; it acts as an assistant of sorts. It helps you explore and develop concepts, by handling the tedious details. In that way, you're free to concentrate on more important things. ❁

Intersection of fields of sweep of two sensors in the shuttle payload bay.

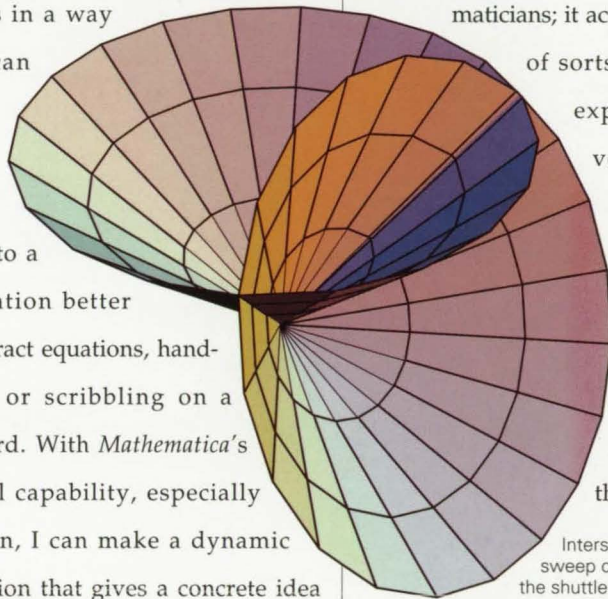

Mathematica is available for: MS-DOS, Microsoft Windows, Macintosh, CONVEX, DG AViiON, DEC VAX (ULTRIX and VMS), DEC RISC, HP 9000, HP Apollo, IBM RISC System/6000, MIPS, NeXT, Silicon Graphics, Sony, Sun-3, and SPARCstations.

Prices in U.S. and Canada start at \$595.

Educational discounts are available.

Orders: 1-800-441-MATH

***Mathematica*® 2.0**
The Standard for Technical Computing


Finally...

A Comprehensive Digital Signal Processing Environment

Hypersignal® - Windows RT-3™ is a set of programs designed to perform such synergistic signal processing functions as graphical analysis, data acquisition with real-time DSP, instrumentation, signal processing, simulation, and image processing. Filter design and code generation programs support eight DSP chip families.



Our object-oriented Block Diagram™ program performs complete algorithms in a visually programmed open software architecture. Function libraries are offered for signal processing and image processing, and the user can create new blocks in standard C language.

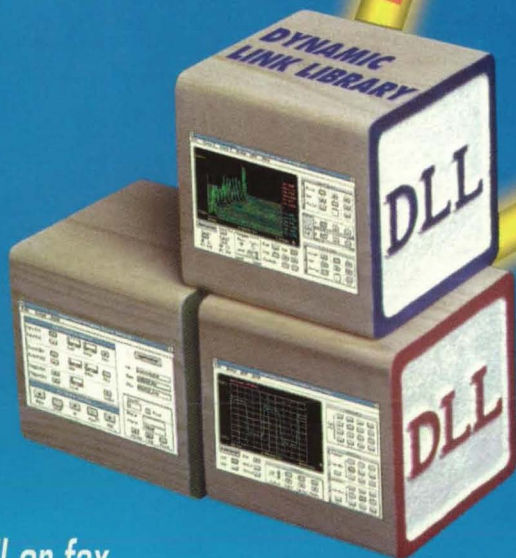

The AMPS™ package transforms the PC into a set of instruments when combined with one of over twenty different DSP/Acquisition boards - the broadest DSP board support in the industry under Microsoft® Windows™ and DOS.

Call or fax
for more information:

ph: (214) 343-8525 fax: (214) 343-2457
9550 Skillman LB 125 • Dallas, Texas 75243

International Distributors:

AUSTRALIA - Electro Optics PTY, LTD.: phone +61-2-654-1873; FAX +61-2-654-1539. DENMARK - Assentoft Electronics: phone +45-86-16-29-26; FAX +45-86-16-20-12. FINLAND - ITT: phone +358-90-739100; FAX +358-90-701-5683. FRANCE - Logabex: phone +33-61-80-94-37; FAX +33-61-20-95-49. ISRAEL - IES, LTD.: phone +972-3-7526333; FAX +972-3-7510927. KOREA - Seoil Enterprise Co.: phone +82-2-237-0872; FAX +82-2-237-0874. SINGAPORE - Bliss Services PTE LTD.: phone +65-3381300; FAX +65-3381900. TAIWAN, ROC - Exartech International Corporation: phone +886-2-977-6828; FAX +886-2-977-6829.

© 1992 Hyperception, Inc.

Hyperception

The Leader In DSP

For More Information Circle No. 405